



Standard

STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Product data


General Information		Rated Lamp Power	13 W
Lamp Type	CFQ13W/GX23		
Number of Lamps	2 piece/unit		
Lamp Footage	-		
Ballast Type	Magnetic Fluorescent		
Base Model	VH2B13TPBLS		
Suitable For Outdoor Use	Yes		
Automatic Restart	Yes		
Operating and Electrical			
Input Voltage	277 V		
Input Frequency	60 Hz		
Total Harmonic Distortion USA	35 %		
Ignition Method	Preheat		
Crestfactor (Nom)	1.5		
Ignition Time (Nom)	1 s		
Input Current (Open Circuit)	0.21		
Input Current (Starting)	0.35		
Ballast Factor (Nom)	0.91		
Power Factor (Nom)	0.97		
Input Current (Nom)	0.1 A		
Input Power (Nom)	27 W		
Mechanical and Housing			
Housing Material		Metal	
Housing		R2	
Housing Dimensions		4.75" x 2.22" x 1.63"	
Approval and Application			
EMC Immunity Standard		FCC Non-Consumer	

Standard

Approval Marks	CSA certificate UL certificate RoHS Compliant
Hum And Noise Level	A
UL Recognized	No
Product Data	
Order product name	STANDARD MAG BALLAST (2) 13W COMPACT(2-PIN) 277V

EAN/UPC - Product	781087048115
Order code	913700518509
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	27
Material Nr. (12NC)	913700518509
Net Weight (Piece)	667.000 g

Dimensional drawing

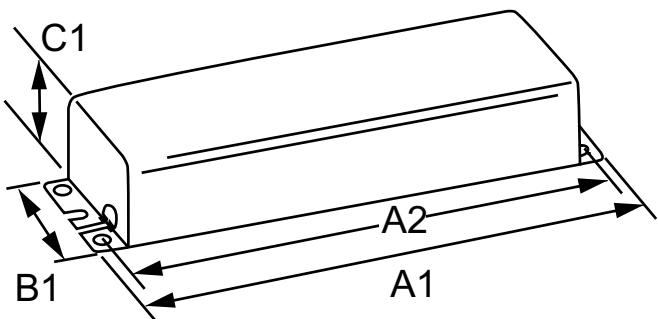

MAG BALLAST (2) 13W COMPACT(2-PIN) 277V

Product	A1	A2	B1	C1
STANDARD MAG BALLAST (2) 13W	4.75 in	4.38 in	2.22 in	1.63 in
COMPACT(2-PIN) 277V				

