



Models AD-SF-25, AD-SS-25 and AD-SO-25

Atkinson Dynamics Non-Amplified Speakers

Available for both indoor and outdoor applications, these 25 watt Speakers feature a heavy duty cast aluminum housing with powder coat finish, talk-back capability and optional integrated volume control. Speakers are available for flush, wall and swivel mounting.


FEATURES

- 25 Watt speakers
- Heavy duty cast aluminum housing
- Powder coat paint finish
- Flush, wall and swivel mount options
- Indoor/outdoor use
- Type 4X, IP66 enclosure

Non-Amplified Speakers Requires option (-8), Pre-Amp Equipped

MODEL	FREQUENCY RESPONSE	INPUT IMPEDANCE	MOUNTING
AD-SF-25	800-5000Hz	8 Ohms	Flush
AD-SS-25	800-5000Hz	8 Ohms	Swivel
AD-SO-25	800-5000Hz	8 Ohms	Wall

Atkinson Dynamics Non-Amplified Speakers (AD-SF-25, AD-SS-25 and AD-SO-25)

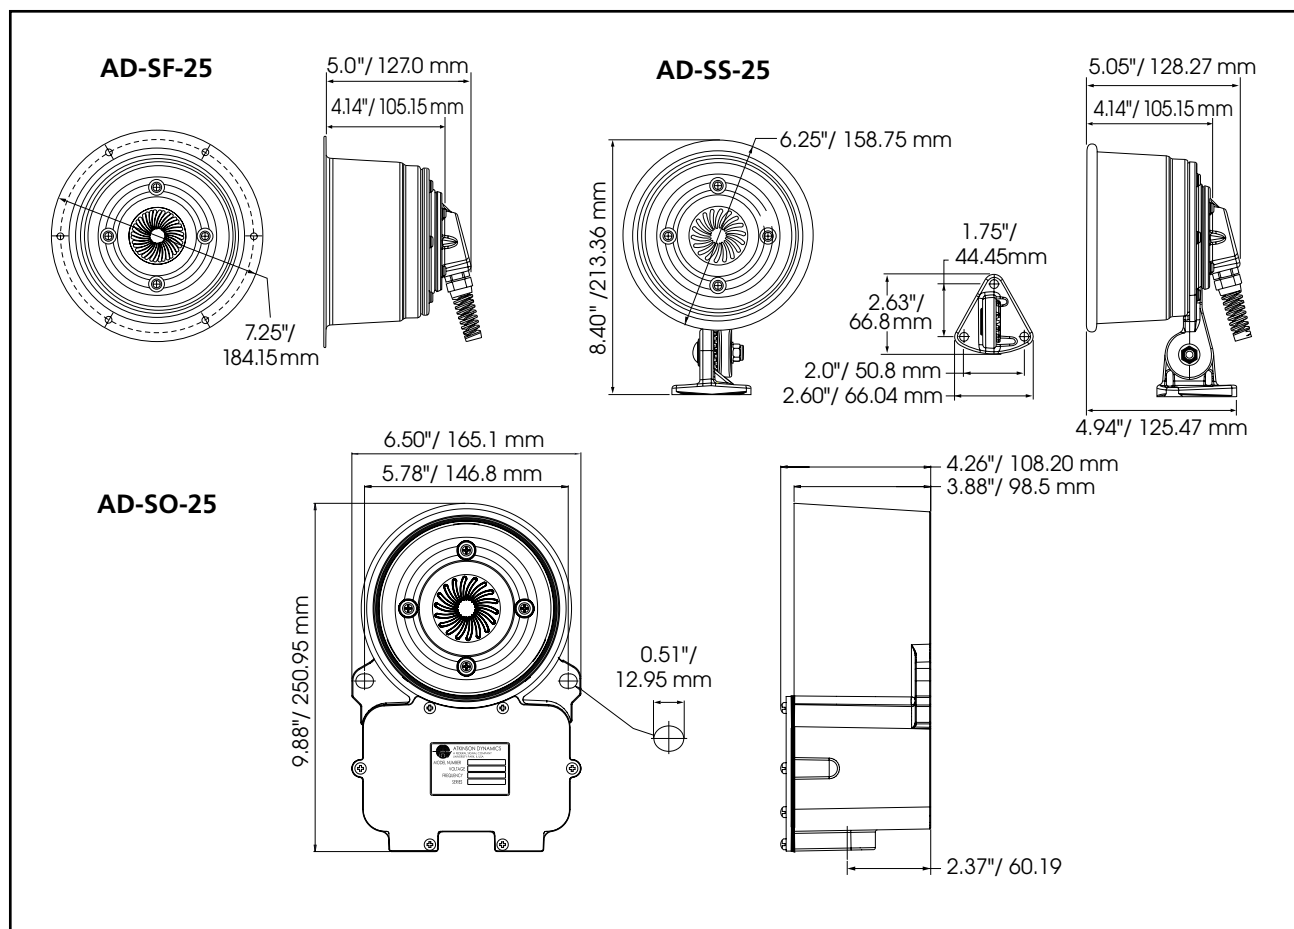

SPECIFICATIONS

Speaker Rating: 25 watt

Operating Temperature: -50°F to 150°F 46°C to 66°C

Net Weight:

AD-SF-25 5.0 lbs 2.27 kg

AD-SS-25 6.0 lbs 2.72 kg

AD-SO-25 8.0 lbs 3.63 kg

Shipping Weight:

AD-SF-25 5.5 lbs 2.49 kg

AD-SS-25 6.0 lbs 2.72 kg

AD-SO-25 10.0 lbs 4.53 kg

Dimensions:

AD-SF-25

Diameter 7.25" 184.2 mm

Depth 5.00" 127.0 mm

AD-SS-25

Height 8.40" 213.4 mm

Width 6.25" 158.8 mm

Depth 5.05" 128.3 mm

AD-SO-25

Height 9.88" 251.0 mm

Width 6.50" 165.1 mm

Depth 4.26" 108.2 mm

HOW TO ORDER

Specify Model:

Non-Amplified Speakers:

AD-SF-25 (flush mount)

AD-SS-25 (swivel mount)

AD-SO-25 (wall mount)