



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

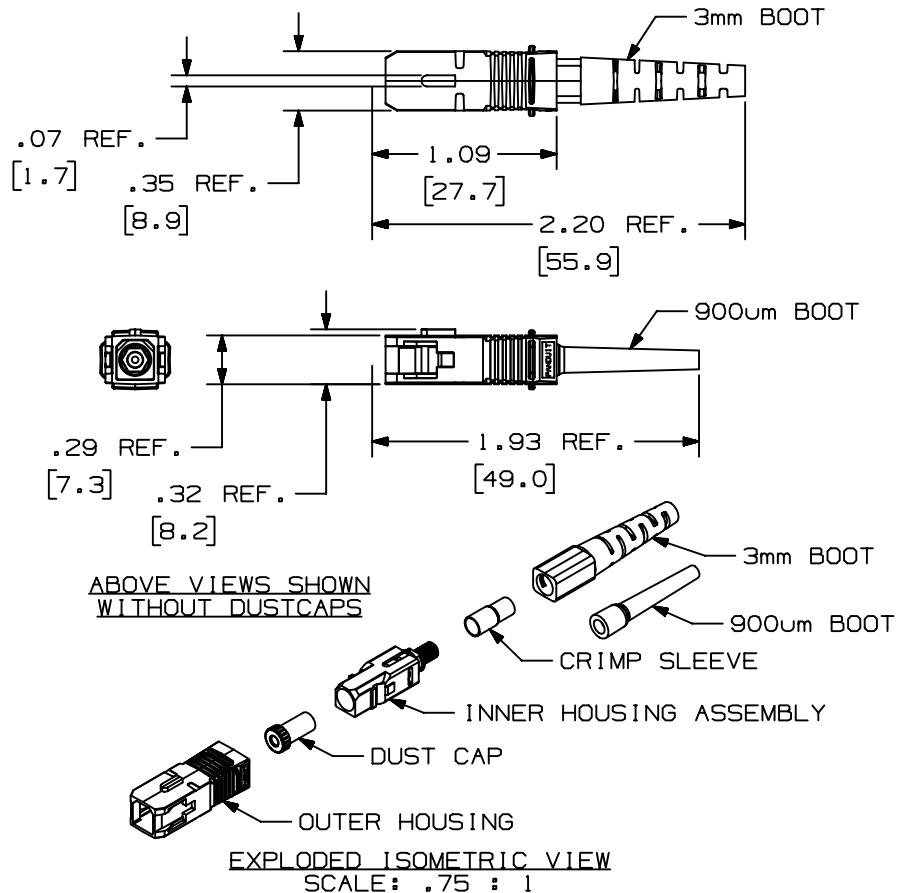

PANDUIT P/N	WEIGHT	FERRULE TYPE
FSCM** FSCSBU	.090 LBS/10 PCS. (40.8 G/10 PCS.)	ZIRCONIA (CERAMIC)

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
2. MULTIMODE CONNECTORS (FSCM**) ACCEPT 50/125 OR 62.5/125 μ m MULTIMODE GLASS OPTICAL FIBER.
3. SINGLEMODE CONNECTORS (FSCSBU) ACCEPT 9/125 μ m SINGLEMODE GLASS OPTICAL FIBER.
4. MATERIALS:
 - A. OUTER HOUSING: POLYETHERIMIDE
 - B. BOOTS: THERMOPLASTIC ELASTOMER
 - C. CRIMP SLEEVE: BRASS
 - D. INNER HOUSING ASSEMBLY:
 - a. INNER HOUSING: POLYETHERIMIDE
 - b. SPRING: STAINLESS STEEL
 - c. BACKBONE: BRASS
 - d. FERRULE HOLDER: BRASS
 - e. FERRULE: ZIRCONIA (CERAMIC)
5. COMPLIES WITH THE FIBER OPTIC PERFORMANCE REQUIREMENTS AS SPECIFIED IN TIA/EIA 568-A AND B.3
6. COMPLIES WITH FOCIS-3 (TIA/EIA 604-3)
7. DIMENSIONS IN PARENTHESIS ARE METRIC

										FIBER-OPTIC SC CONNECTOR CUSTOMER DRAWING		
										 PANDUIT ™ CORP. TINLEY PARK, ILL 60477		
										 THIRD ANGLE PROJECTION		
										ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.		
										DRAWING FILENAME M01069AA_DC_02A.prt		
										DIMENSIONAL TOLERANCES ARE: (.X) $\pm$.2 (5.1) (.XXX) $\pm$.010 (0.3) (.XX) $\pm$.03 (0.8) ANGLES $\pm$ 1°		
										SCALE NONE		
										PART NO. FSCM**/FSCSBU		
										DRAWING NO. 01069-13		
										SIZE A		
										SEE NOTES		
1	05-10-05	MYW		RELEASED TO PRODUCTION	01069-13					DATE 06-21-01		
REV	DATE	BY	CHK	DESCRIPTION	ECN	-	R	CUST	SUP	OTH	CHK'D JJR	