


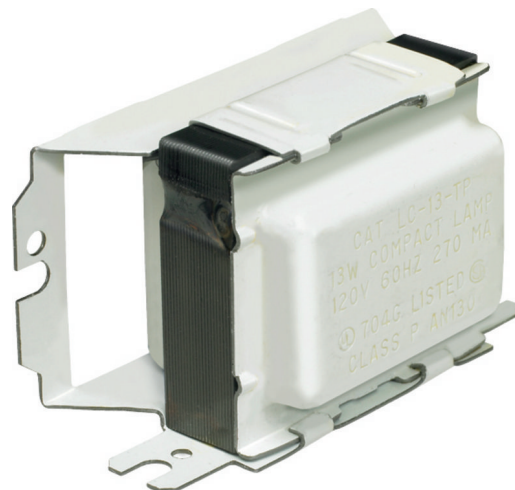

# Standard

## STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

### Product data

| General Information           |                      |
|-------------------------------|----------------------|
| Lamp Type                     | CFQ13W/GX23          |
| Number of Lamps               | 1 piece/unit         |
| Lamp Footage                  | -                    |
| Ballast Type                  | Magnetic Fluorescent |
| Base Model                    | LC13TP               |
| Suitable For Outdoor Use      | Yes                  |
| Automatic Restart             | Yes                  |
| Operating and Electrical      |                      |
| Input Voltage                 | 120 V                |
| Input Frequency               | 60 Hz                |
| Total Harmonic Distortion USA | 15 %                 |
| Ignition Method               | Preheat              |
| Crestfactor (Nom)             | 1.5                  |
| Ignition Time (Nom)           | 1 s                  |
| Input Current (Open Circuit)  | 0                    |
| Input Current (Starting)      | 1.5                  |
| Ballast Factor (Nom)          | 0.93                 |
| Power Factor (Nom)            | 0.49                 |
| Input Current (Nom)           | 0.27 A               |
| Input Power (Nom)             | 16 W                 |


| Rated Lamp Power                         | 13 W                  |
|------------------------------------------|-----------------------|
| Wiring                                   |                       |
| Wire Striplength                         | 0.50/0.375 mm         |
| Lamp Connection                          | Series                |
| Wire Length by Color                     | See data sheet        |
| Wire Gauge (Nom)                         | 18AWG mm              |
| Wire Type                                | Solid                 |
| Remote Wiring Configuration Allowed      | Yes                   |
| Tandem Wiring Configuration Allowed      | No                    |
| Through Wiring Configuration Allowed     | No                    |
| Max Ballast-Lamp Distance Remote Wiring  | 30'                   |
| Max Ballast-Lamp Distance Tandem Wiring  | -                     |
| Max Ballast-Lamp Distance Through Wiring | -                     |
| Mechanical and Housing                   |                       |
| Housing Material                         | Metal                 |
| Housing                                  | C2                    |
| Housing Dimensions                       | 1.06" x 1.59" x 1.81" |
| Approval and Application                 |                       |
| EMC Immunity Standard                    | FCC Non-Consumer      |

Standard

|                     |                                                     |
|---------------------|-----------------------------------------------------|
| Approval Marks      | CSA certificate UL certificate RoHS<br>Compliant    |
| Hum And Noise Level | A                                                   |
| UL Recognized       | No                                                  |
| Product Data        |                                                     |
| Order product name  | STANDARD MAG BALLAST (1) 13W<br>COMPACT(2-PIN) 120V |

|                                 |              |
|---------------------------------|--------------|
| EAN/UPC - Product               | 781087048184 |
| Order code                      | 913700590509 |
| Numerator - Quantity Per Pack   | 1            |
| Numerator - Packs per outer box | 12           |
| Material Nr. (12NC)             | 913700590509 |
| Net Weight (Piece)              | 0.303 kg     |

Dimensional drawing

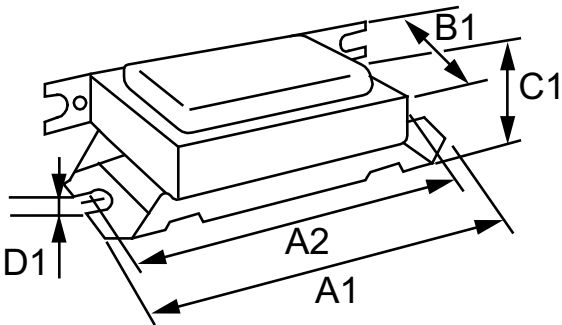

MAG BALLAST (1) 13W COMPACT(2-PIN) 120V

| Product                                             | A1      | A2      | B1      | C1      | D1      |
|-----------------------------------------------------|---------|---------|---------|---------|---------|
| STANDARD MAG BALLAST (1) 13W<br>COMPACT(2-PIN) 120V | 3.06 in | 2.75 in | 1.81 in | 1.59 in | 0.19 in |

