
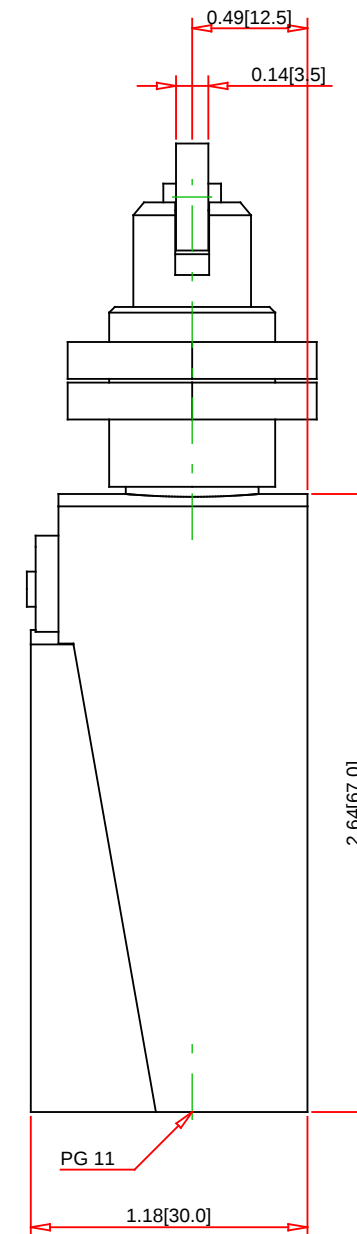


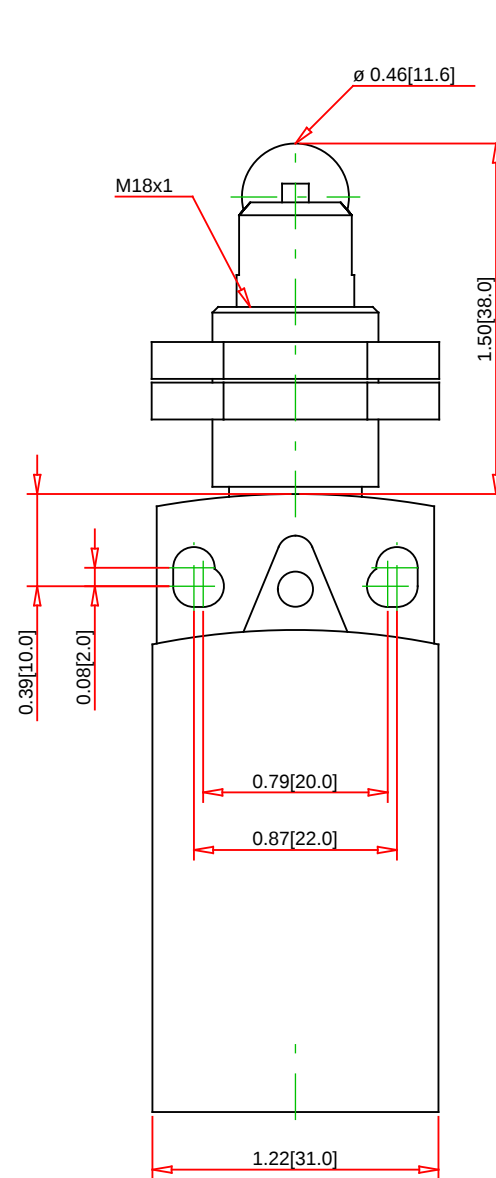

Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XCKP21H2G11



Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Terminal Type: Screw Clamp
Enclosure Rating: NEMA 1/2/4/6/12/13; IP66/67
Approvals: UL # E164353 - CSA #164581 - CE Marked
Weight: 0.130 kg (0.287 lb)
Conforming to Standards: CENELEC EN 50047
RoHS: Yes
Operating Temperature Range: -13 to 158 ° F
Shock Resistance: 50G
Vibration Resistance: 25G
Max. Actuation Speed : 0.5 m/s
Repeat Accuracy: 0.1 mm on the tripping points
Operating Torque/Force: 88.5 Inch-Pounds (10Nm)

Specification:

Description: XCKP Limit Switch M18 threaded metal end plunger with nuts
Body Style/Type Description: IEC OsiSense Compact Modular 31mm wide Plastic Limit Switches
Head Type: ZCEH2 M18 threaded steel roller plunger with nuts
Lever Arms:
Body with Contact Type: ZCP21 2-pole N.O./N.C. Snap Action
Conduit Thread: ZCEG11 PG 11
Ampere Rating Continuous: 10A
Maximum Voltage Rating: 240VAC/250VDC
Actuation: Horizontal
Actuator Action: Momentary
Lever Arm Length:
Roller Dimension: 11.6 x3.5mm
Roller Material: Steel
Contact Configuration: 1 N.O./1 N.C.
Contact Operation: Snap Action
Connection Type: Conduit Entrance (Pg 11)
Head Material: Zamak
Positive Opening: Yes
Cable Length: