





GE  
Lighting

### 39585 - 4042

GE PAR36 - Emergency Building Light; Emergency Building

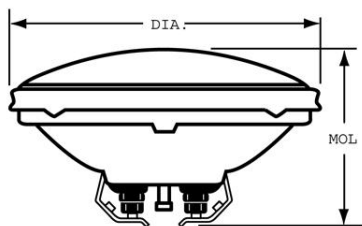

#### GENERAL CHARACTERISTICS

|                     |                    |
|---------------------|--------------------|
| Lamp Type           | Sealed Beam - PAR  |
| Bulb                | PAR36              |
| Base                | Screw Terminals    |
| Filament            | C-6                |
| Rated Life (NOM)    | 150.0 h            |
| Primary Application | Emergency Building |

#### PHOTOMETRIC CHARACTERISTICS

|                                    |               |
|------------------------------------|---------------|
| Beam Spread - Horizontal           | 45.0 - 10.0 ° |
| Beam Spread - Vertical             | 20.0 - 10.0 ° |
| Max. Beam Candlepower (MBCP) (MAX) | 1100.0        |

#### ELECTRICAL CHARACTERISTICS

|               |      |
|---------------|------|
| Wattage (NOM) | 12.0 |
| Voltage (NOM) | 6.4  |

#### DIMENSIONS

|                                    |                    |
|------------------------------------|--------------------|
| Maximum Overall Length (MOL) (NOM) | 2.750 in(69.8 mm)  |
| Bulb Diameter (DIA) (NOM)          | 4.500 in(114.3 mm) |

#### PRODUCT INFORMATION

|                            |                |
|----------------------------|----------------|
| Product Code               | 39585          |
| Description                | 4042           |
| ANSI Code                  | 4042           |
| Standard Package           | Case           |
| Standard Package GTIN      | 10043168395851 |
| Standard Package Quantity  | 12             |
| Sales Unit                 | Unit           |
| No Of Items Per Sales Unit | 1              |
| No Of Items Per Standard   | 12             |
| Package                    |                |
| UPC                        | 043168395854   |