


SKINDICHT® BLK / BLK-GL

SKINDICHT® BLK / BLK-GL, blind plugs with PG connection thread, for closing pre-threaded holes

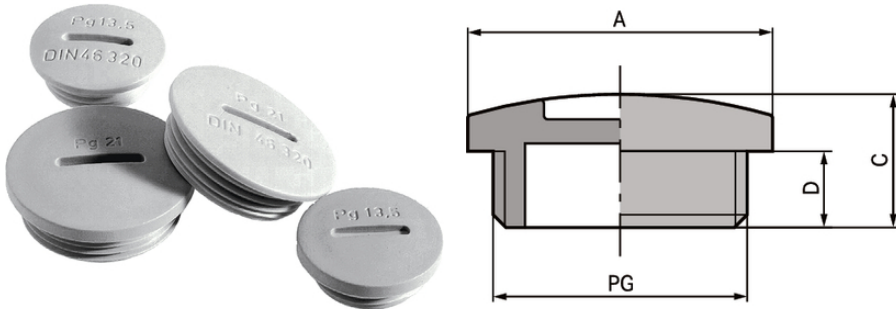

Benefits

For closing pre-threaded holes

Application range

Control cabinet construction
Distribution box
Junction boxes

Design

PG connection thread

Note

SKINDICHT® BLK-GL offers high stability due to glass fibre reinforcement

Technical Data

Classification:	ETIM 5.0 Class-ID: EC000032 ETIM 5.0 Class-Description: Screw plug
On request:	with O-ring fitted
Colour delivered:	RAL 7035 light grey
Material:	BLK: polystyrene BLK-GL: Polyamide, glass fibre-reinforced
Protection rating:	IP 54 IP 68 (with O-Ring)
Temperature range:	BLK: -20°C to +70°C BLK-GL: -40°C to +100°C

SKINDICHT® BLK / BLK-GL**Note**

Photographs are not to scale and do not represent detailed images of the respective products.
Prices are net prices without VAT and surcharges. Sale to business customers only.

**SKINDICHT® BLK / BLK-GL**

Article number	Article designation / size	Thread length, D (mm)
SKINDICHT® BLK		
52005949	PG 7	6
52005950	PG 9	6
52005960	PG 11	6
52005970	PG 13,5	6
52005980	PG 16	6
52005990	PG 21	8
52006000	PG 29	8
52006010	PG 36	10
52006020	PG 42	10
52006030	PG 48	12
SKINDICHT® BLK-GL		
52024848	PG 7	6
52024849	PG 9	6
52024850	PG 11	6
52024851	PG 13,5	6
52024852	PG 16	6
52024853	PG 21	8
52024854	PG 29	8
52024855	PG 36	10
52024856	PG 42	10
52024857	PG 48	12

Last Update (16.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.deYou can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16