

PANDUIT P/N	WEIGHT
P12B47M	4.9kg

SPECIFICATION:

1. STANDARD:
- UNIT TYPE: BASIC
 - ORIENTATION: HORIZONTAL,1U
 - OUTLET QTY&TYPE: (12)C13
 - INPUT VOLTAGE: 200-240VAC
 - INPUT CURRENT: 30A(24A DERATED)
 - BREAKER QTY&TYPE: (2)20AMP,DOUBLE-POLE
 - INPUT PHASE: SINGLE-PHASE
 - RATED POWER: 5.0kVA
 - INPUT PLUG: NEMA L6-30P
 - INPUT POWER CORD: 3m [10'], FRONT FEED
 - REGULATORY STANDARD: RoHS COMPLIANT

2. ADDITIONAL:

NONE

3. ACCESSORIES:

- DOCUMENTATION KIT
- PRODUCT SAFETY WARNING SHEET

NOTES:


- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN INCHES
- INSTALLATION SHALL COMPLY WITH ALL APPLIABLE NATIONAL, STATE AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL

IDENTIFICATION

PART NUMBER
P12B47M

DESCRIPTION

BASIC PDU. 30AMP,(12)C13,NEMA L6-30P-3M,BLACK

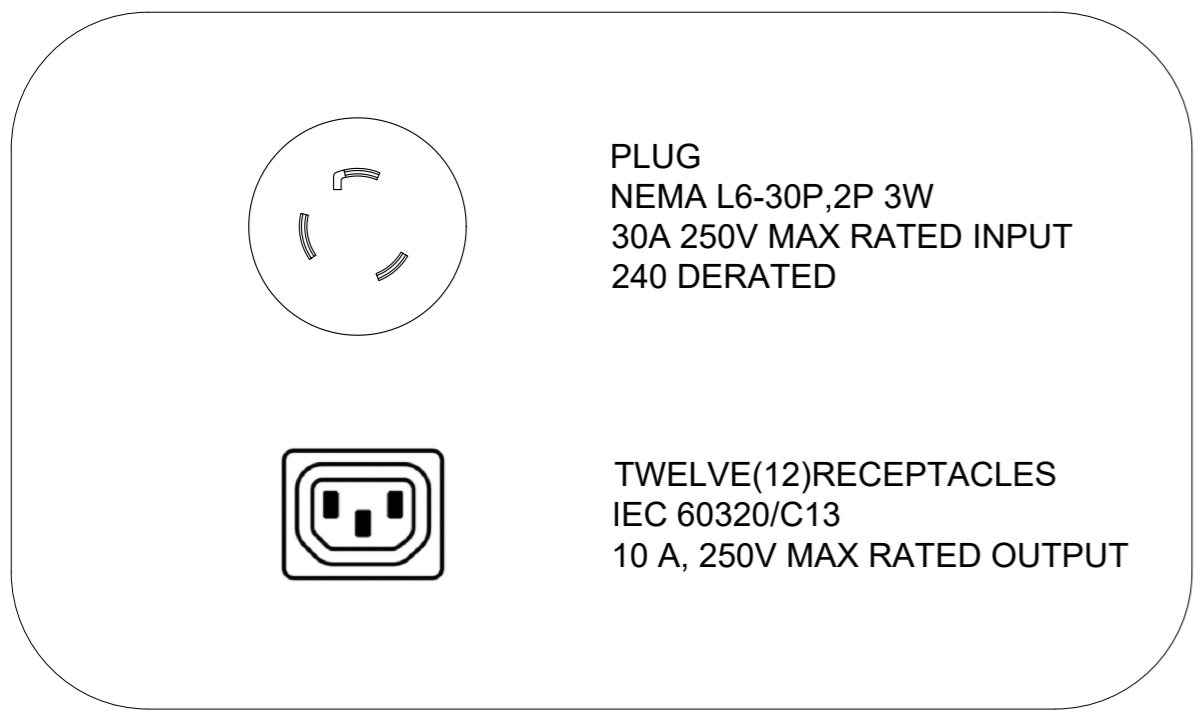

FRONT VIEW

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02B	10/30/2023	LWB	MIM	EDM	1.UPDATED THE PLUG 2.UPDATED THE "IDENTIFICATION" DESCRIPTION 3.UPDATED THE "ACCESSORIES" DESCRIPTION	P12B47M
02A	05/28/2020	LWB	MIM	EDM	UPDATED THE DESCRIPTION & THE COMPLIANCE LABEL	P12B47M
01B	08/21/2017	JIANG	MIM	EDM	REVISED TOLERANCE	P12B47M
01A	06/28/2017	JIANG	MIM	EDM	INITIAL RELEASE	P12B47M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE BASIC SERIES PDU P12B47M CONTROL DRAWING		
ITEM REVISION NAME:		PANDUIT
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
THIRD ANGLE PROJECTION		DRAWING NUMBER: P12B47M_DC
DRAWN BY JIANG	DATE 05/24/2017	SCALE NONE
CHK SEAN	SHT 1 OF 1	
SCALE NONE		SCALE B