


B

A


B

A

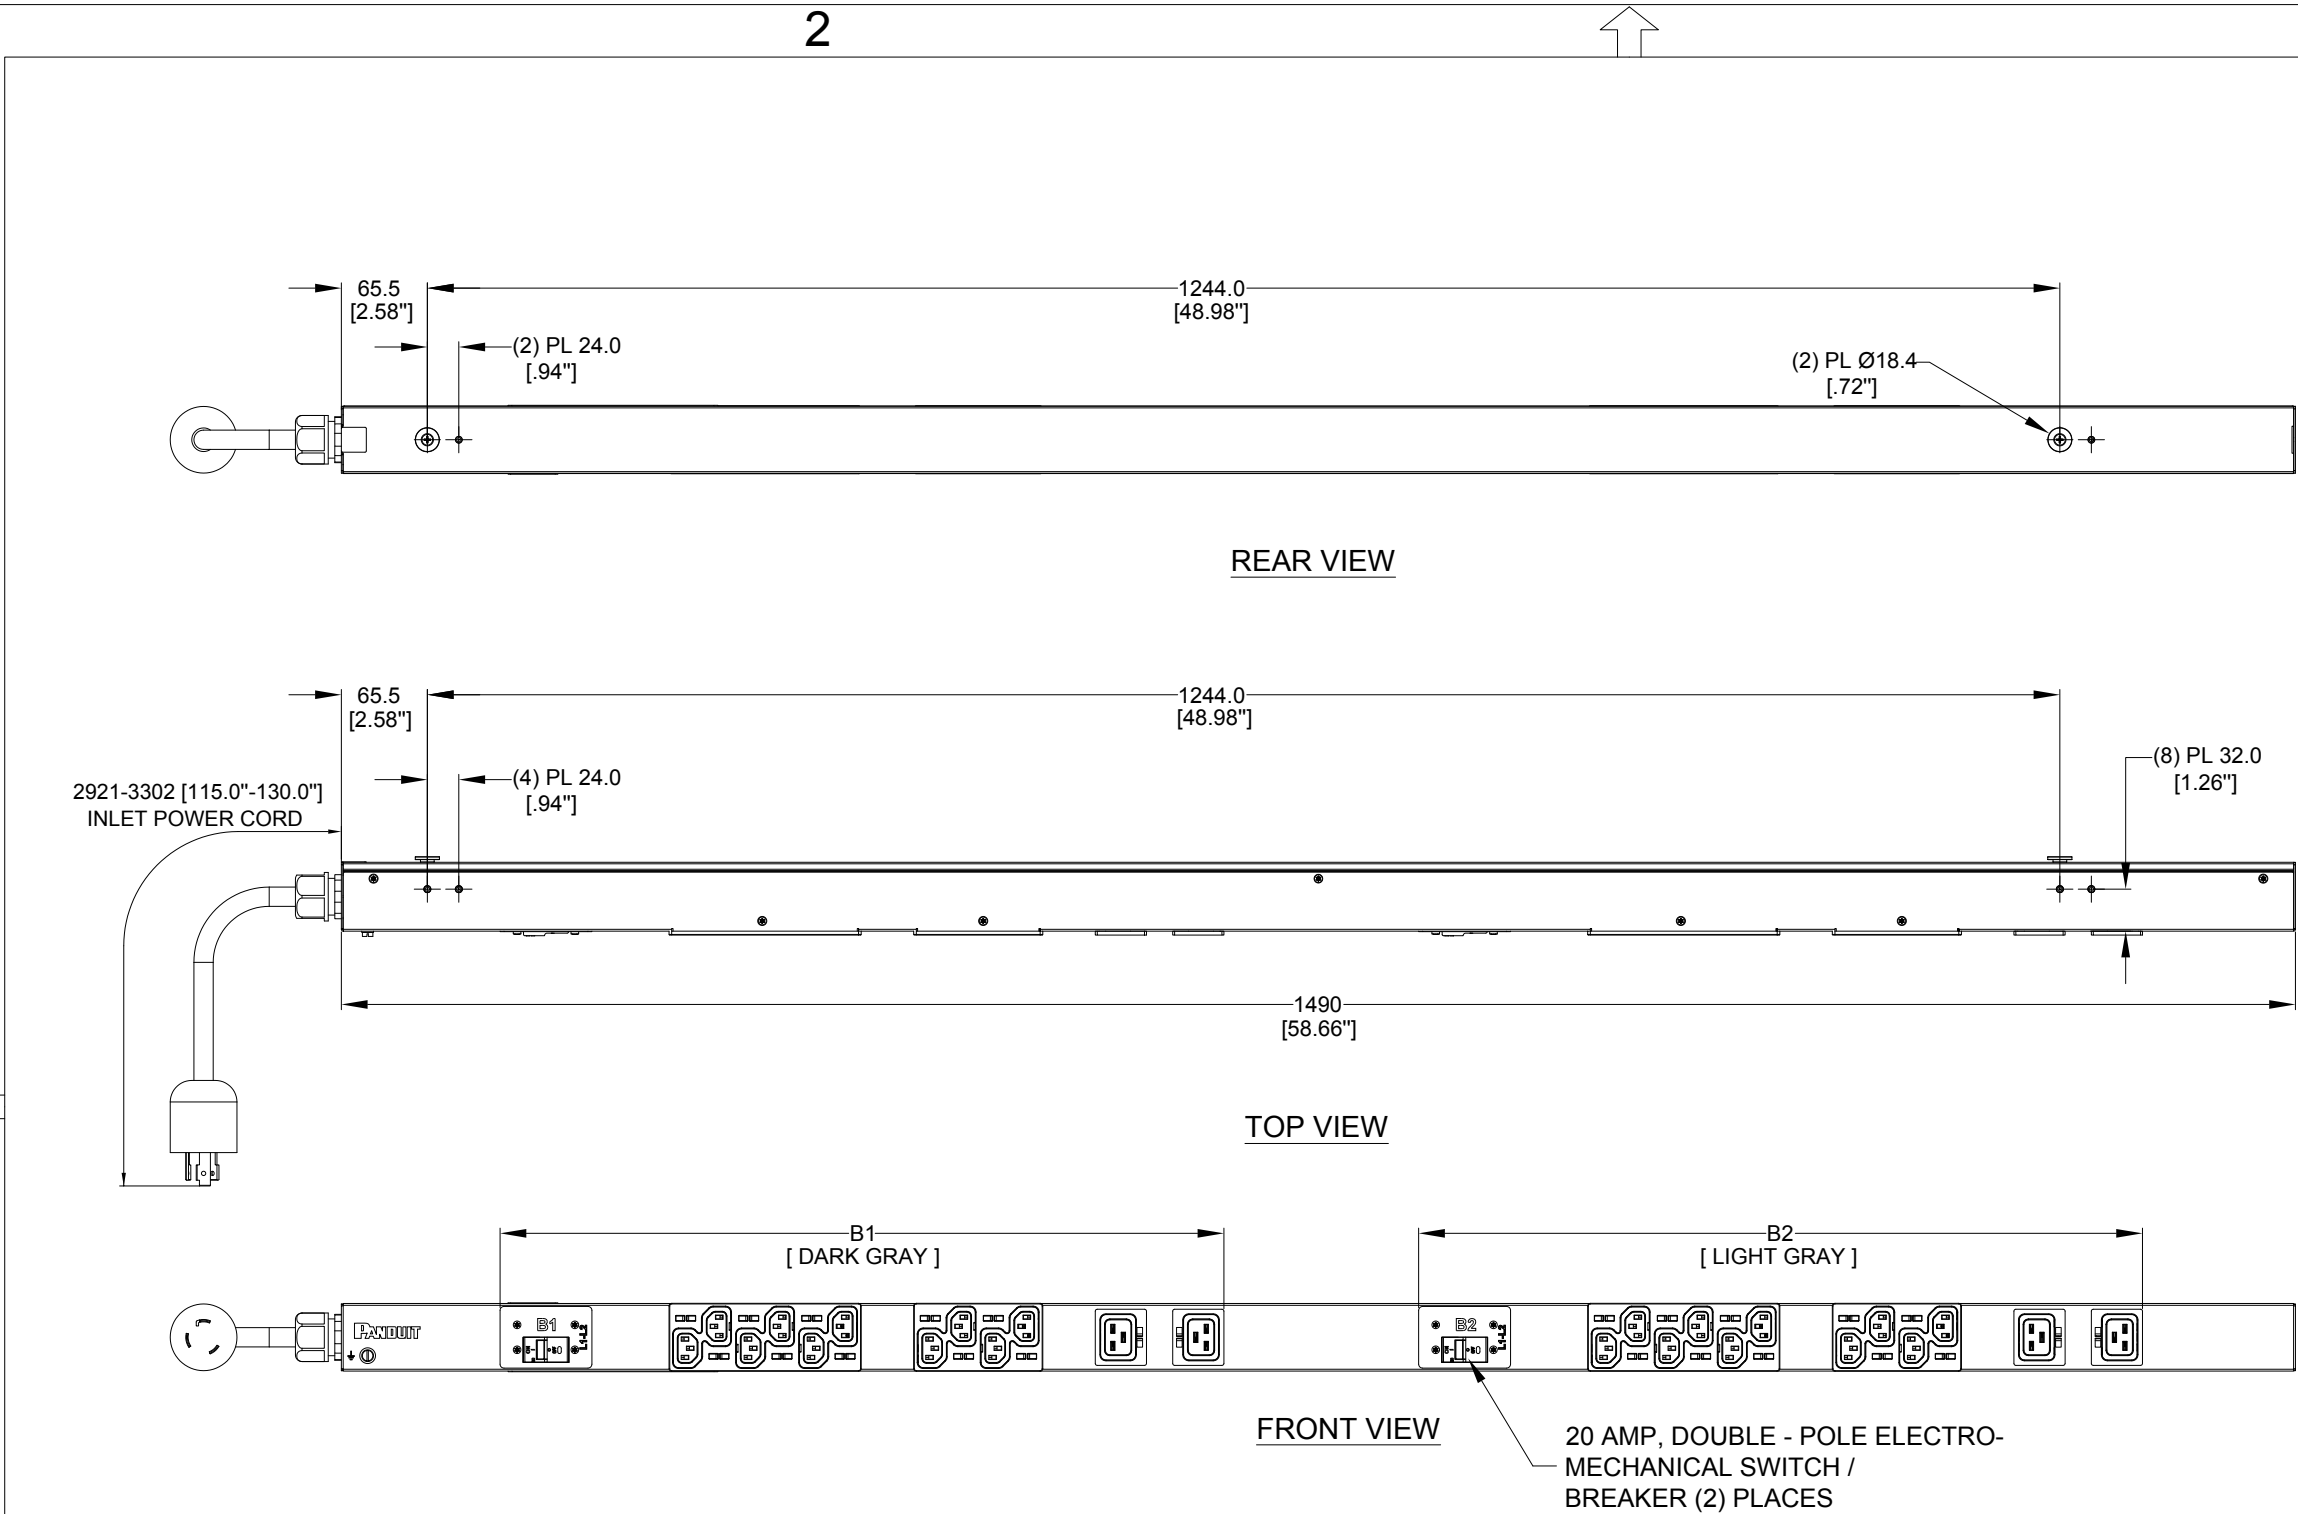


PANDUIT P/N	WEIGHT
P24B15M	4.6kg


- NOTES:
1. IDENTIFICATION:
UNIT TYPE: BASIC
ORIENTATION: VERTICAL, MID
OUTLET QTY&TYPE: (20) C13, (4) C19
BREAKER QTY&TYPE: (2) 20A, DOUBLE-POLE
INPUT VOLTAGE: 200-240VAC
INPUT CURRENT: 30A (24A DERATED)
INPUT PHASE: SINGLE PHASE
RATED POWER: 5.0kVA
INPUT PLUG: NEMA L6-30P
INPUT CORD LENGTH: 3m [10']
 2. ACCESSORIES:
POCKET GUIDE
 3. RoHS COMPLIANT
 4. VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
 5. MAXIMUM ALLOWABLE INPUT POWER = 5.0KW
 6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES



PLUG
30 AMP, 250V
TWIST LOCK
NEMA L6-30P



FOUR (4)
RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C19

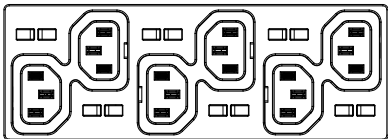

TWENTY (20)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C13

01B	08/21/2017	KUN	MIM	EDM	REVISED TOLERANCES	P24B15M
01A	06/28/2017	KUN	MIM	EDM	INITIAL RELEASE	P24B15M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE BASIC SERIES PDU P24B15M CUSTOMER DRAWING			
ITEM REVISION NAME			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance(mm) 04<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		MATERIAL/COLOR: N/A	
THIRD ANGLE PROJECTION		DRAWING NUMBER: P24B15M_DC	
DRAWN BY KUN	DATE 05/24/2017	CHK SEAN	SCALE NONE
SHT 1 OF 1		SCALE B	