

# UniCam® Connector, LC



50 µm multimode (OM3/OM4 compatible)

CORNING

Corning UniCam® LC connectors offer optical performance in a fast, easy field-termination solution ideal for fibre-to-the-workstation applications where setup and teardown time is critical. The high-precision mechanical splice technology enables fibre optic networks to be installed quickly and cost effectively. Installation of an LC, SC or ST® compatible connector can be accomplished in about 50 seconds to one minute with the UniCam High-Performance Tool Kit. The lightweight, handheld installation tool and high-performance precision cleaver virtually eliminate human variability during installation, ensuring terminations are right the first time, every time. This kit was designed with consideration for network installers, from the cleaver, with its intuitive, hand-held precision design and dual-clamp precision hold, to the installation tool, with its immediate go/no-go feedback signal indicating proper mating of the field fibre to the fibre stub. Installation is as easy as strip, clean, cleave, cam and crimp, with exceptional optical performance assured. Every UniCam connector is assured to meet the published specification at the time of installation or Corning will replace it.

Corning UniCam® high-performance connectors offer best-in-class optical performance in a fast, easy field-termination solution. These high-precision zirconia ceramic ferrule connectors assured exceptional insertion loss – 0.1 dB typical/0.5 dB maximum per connector pair for multimode, 0.2 dB typical/0.5 dB maximum per connector pair for single-mode. Installation of an LC, SC or ST® compatible connector can be accomplished in about 50 seconds to one minute with the UniCam high-performance tool kit.

The lightweight, hand-held installation tool and high-performance precision cleaver virtually eliminate human variability during installation, ensuring terminations are right the first time, every time. This kit was designed with consideration for network installers, from the cleaver, with its intuitive, hand-held precision design and dual-clamp precision hold, to the installation tool, with its immediate go/no-go feedback signal indicating proper mating of the field fiber to the fiber stub. Installation is as easy as strip, clean, cleave, cam and crimp, with exceptional optical performance assured. Every UniCam® connector is assured to meet the published specification at the time of installation or Corning will replace it.

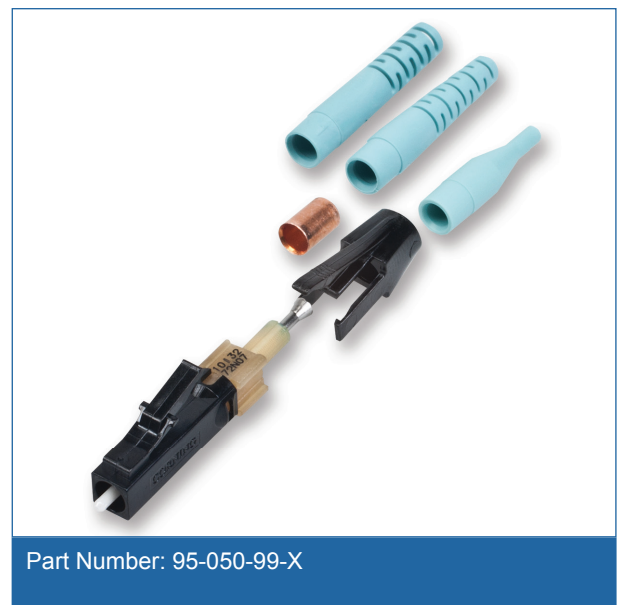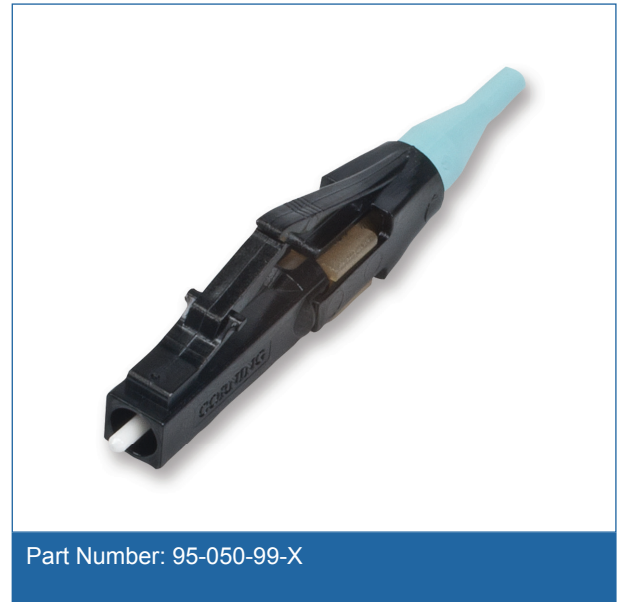

## Features and Benefits

**Performance guaranteed**  
100 percent yield guarantee

# UniCam<sup>®</sup> Connector, LC

50 µm multimode (OM3/OM4 compatible)

CORNING

## Features and Benefits

### Broad operating temperature (-40° to +75°C)

Utility and flexibility

### Factory-polished end face

Consistent optical performance

### Fast termination and no consumables

Low installation cost

### Minimum insertion loss

Optimum optical performance

## Standards

**Approvals and Listings** Passed EIA/TIA 568-B.3

**Intermateability** Connectors are FOCIS compliant with TIA/EIA 604-10A and IEC61754-20

## Specifications

General Specifications	
Technology	No-Epoxy/No-Polish
Keyed	No
Product Type	Field-Installable Connectors
Corning Logo	Yes
Packaging	Single Pack
Fiber Category	50 µm MM (OM3/OM4 compatible)

Temperature Range	
Operation	-40 °C to 75 °C exceeding EIA/TIA 568-B.3 (-40 °F to 167 °F exceeding EIA/TIA 568-B.3)

Design - Connector	
Connector Type	LC
Ferrule Material	Ceramic
Housing Material	Composite

# UniCam<sup>®</sup> Connector, LC

50 µm multimode (OM3/OM4 compatible)

CORNING

## Design - Connector

Housing Color	Black
Boot Color	Aqua

## Mechanical Specifications - Connector

Durability	≤ 0.2 dB change by 500 rematings, FOTP-21
Temperature Cycling	≤ 0.3 dB IL, -40° to +75°C, 21 cycles
Nominal Fiber Outer Diameter	125 µm
Tensile Strength Jacketed Cable	50 N, change ≤ 0.2 dB, FOTP-6 (11 lb, change ≤ 0.2 dB, FOTP-6)
Tensile Strength 900 µm Cable	4.9 N, change ≤ 0.2 dB, FOTP-6 (1.1 lb, change ≤ 0.2 dB, FOTP-6)

## Optical Specifications - Connector

Insertion Loss, Typical	0.1 dB
Insertion Loss, Maximum	0.50 dB
Reflectance	≤ -26 dB

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

## Ordering Information

Part Number	95-050-99-X
Product Description	UniCam <sup>®</sup> High-Performance Connector, LC, 50 µm multimode (OM3/OM4 compatible), ceramic ferrule, logo, single pack, black housing, aqua boot
EAN Code	4042673619420

## Shipping Information

Units per Delivery	1/1
Package Contents	Connector, Trigger, Crimp Band, Boot (900 µm), Boot (3.0 mm.), Boot (2.0 mm)

# UniCam<sup>®</sup> Connector, LC

50 µm multimode (OM3/OM4 compatible)

The CORNING logo is a blue square with the word "CORNING" in white, uppercase, serif font centered inside.

## Notes



Corning Comunicacoes Opticas • Estrada do Camorim 633 • Jacarepagua CEP 22780-070 • Rio De Janeiro, RJ Brazil  
+55 21 3416 5150 • FAX: +55 21 2441 2037 • [www.corning.com/opcomm/csa](http://www.corning.com/opcomm/csa)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).  
All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. ©  
2015 Corning Optical Communications. All rights reserved.