




2

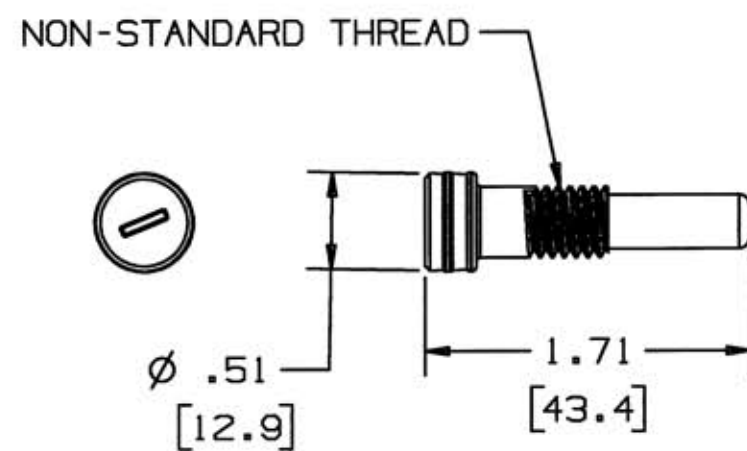


PIN

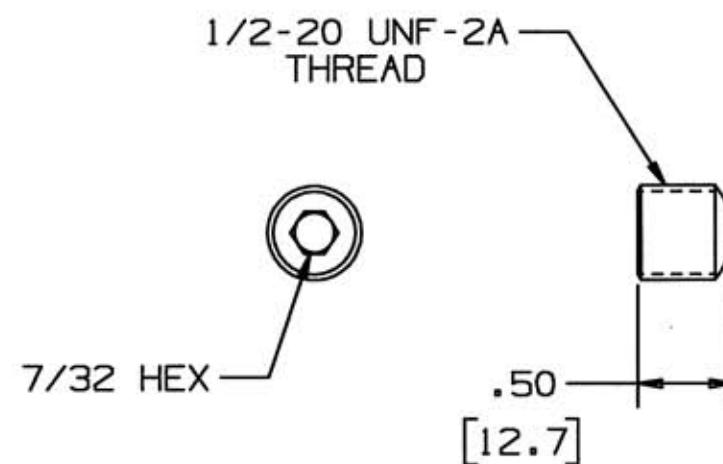

SOCKET HEAD SET SCREW
(QTY. 2)

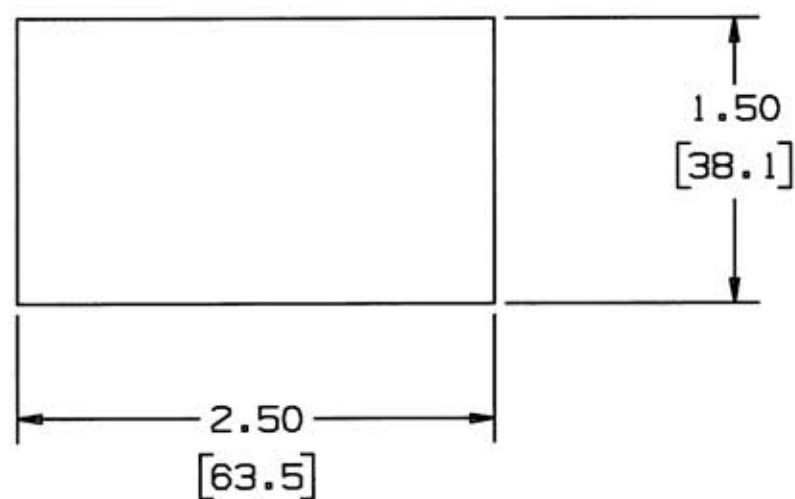

COPPER SHEET
(.004/.005 THICK)



LEAD WIRE
(Ø .065 X6.00" LG.)

NOTES:
1. DIMENSIONS ARE INCHES $\pm .02$
[mm] $\pm .5$

LIST OF PARTS

[illegible]

2	ADD $\pm .02$ & $\pm .5$ TO NOTE 1 PER DCN 11484 TwB	<i>TwB</i>	12/15/04
1	RELEASED PER DCN 10992 MJM TB	<i>MJM</i>	6/26/05
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE	
-------	--

PIN KIT

TOLERANCES UNLESS OTHERWISE SPECIFIED		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS	± 1/64	DR. BY	MJM
DECIMALS	± .005	TR. BY	
ANGLES	± 2°	CHK'D BY	
		APP. BY	
		SCALE	1 : 1
		DATE	6/11/0

DIMENSION SHEET FOR CAT. NO.
HBLPK

REPAIRABLE ☐ NON-REPAIRABLE ☒

10

M-8919

2