
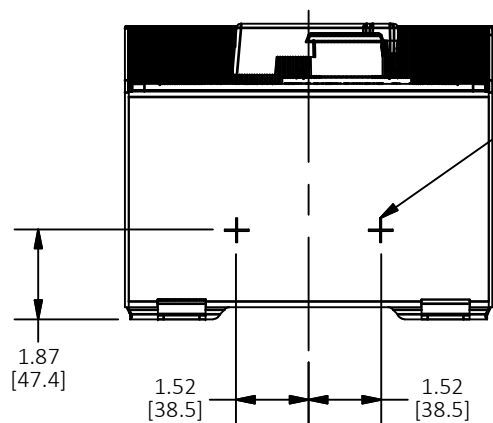
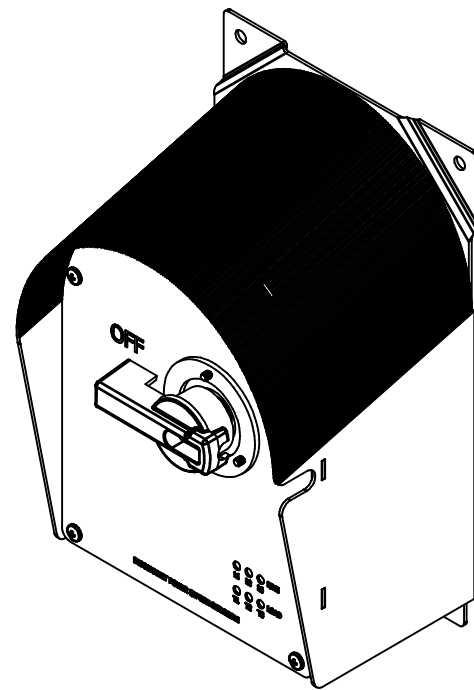
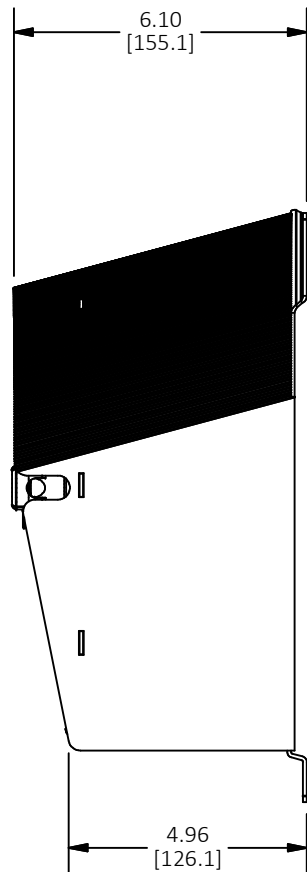



M-13887

1

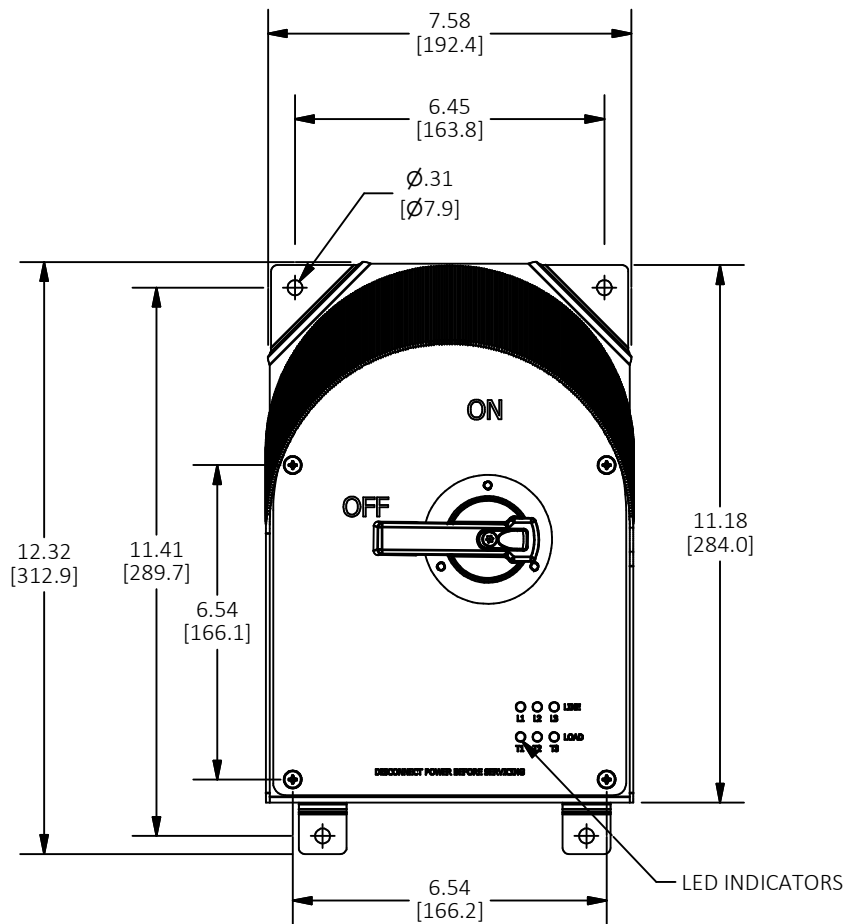


DRILL SPOTS FOR 1-1/4" NPT CONDUIT FITTING, (6) PLACES.
PROVISION FOR TOP, BOTTOM, & BACK FEED.
INSTALLER TO DRILL OR PUNCH Ø1-3/4 INCH (Ø44.5 mm)
HOLE FOR CONDUIT FITTING.

1-1/4 INCH NPT CONDUIT FITTING, (2) INCLUDED

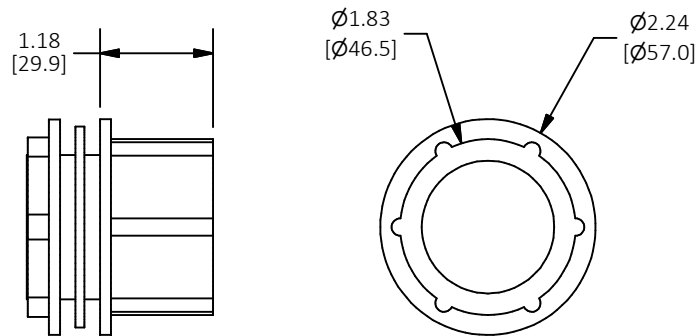

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
ENCLOSURE & HARDWARE	STAINLESS STEEL	
HANDLE & MOUNT	PBT	
GASKET	EPDM FOAM	
CONDUIT HUB	ZINC	
LED/PCBD		
LENS	PC	
GROUND BUS		



SCALE: 1/8
EMBEDED 3D CAD MODEL IN
"M-13887_ACAD.dwg"

1	RELEASED PER DCN #23623 AD	TLS	06/04/18
REV	DESCRIPTION	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE.
DIMENSIONS ARE IN INCHES [mm].

TITLE
CIRCUIT-LOCK™ 60/100 AMP STAINLESS STEEL
DISCONNECT SWITCH, LED INDICATORS

		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX = ± .005 ANGLE TOL. ±2°	DR. BY AD	SCALE 1 / 4	
	CHK. BY CAC	DATE 03/13/18	

- NOTES:
- CATALOG NUMBERS: HBLDS6SSRP, HBLDS10SSRP
 - DIMENSIONS SHOWN ARE IN INCHES [mm].
 - ENCLOSURE TYPE 4X & 12
 - cULus LISTED
 - NSF CERTIFIED AND IP69K RATING.

CAT NO. HBLDS6SSRP (60 AMP 600 VAC)		CAT NO. HBLDS10SSRP (100 AMP 600 VAC)	
HP	VOLTAGE	HP	VOLTAGE
7.5 HP (5.6kW)	120 VAC 1 Ø	7.5 HP (5.6kW)	120 VAC 1 Ø
15 HP (11.19 kW)	200-240 VAC 1 Ø	15 HP (11.19 kW)	200-240 VAC 1 Ø
30 HP (22.37 kW)	480 VAC 1 Ø	30 HP (22.37 kW)	480 VAC 1 Ø
30 HP (22.37 kW)	200-240 VAC 3 Ø	30 HP (22.37 kW)	200-240 VAC 3 Ø
50 HP (37.28 kW)	480 VAC 3 Ø	50 HP (37.28 kW)	480 VAC 3 Ø
50 HP (37.28 kW)	600 VAC 3 Ø	50 HP (37.28 kW)	600 VAC 3 Ø