



# MICS3-CBAZ90IZ1

microScan3

SAFETY LASER SCANNERS

**SICK**  
Sensor Intelligence.



Illustration may differ

## Ordering information

| Integration in the control system | Sub product family            | Protective field range | Number of fields | Number of monitoring cases | Connection type | Type            | Part no. |
|-----------------------------------|-------------------------------|------------------------|------------------|----------------------------|-----------------|-----------------|----------|
| CIP Safety™ over Ether-Net/IP™    | microScan3 Pro - Ether-Net/IP | 9 m                    | 128              | 128                        | M12             | MICS3-CBAZ90IZ1 | 1094460  |

Replacement sensor without system plug; only functional in combination with system plug;

Replacement sensor for 1094461

Other models and accessories → [www.sick.com/microScan3](http://www.sick.com/microScan3)



## Detailed technical data

### Features

|                                                  |                                                               |
|--------------------------------------------------|---------------------------------------------------------------|
| <b>Sub product family</b>                        | microScan3 Pro - EtherNet/IP                                  |
| <b>Model</b>                                     | Sensor without system plug                                    |
| <b>Application</b>                               | Indoor                                                        |
| <b>Protective field range</b>                    | 9 m                                                           |
| <b>Warning field range</b>                       | 64 m                                                          |
| <b>Collision protection field range</b>          | 19 m (on reference target)                                    |
| <b>Number of simultaneously monitored fields</b> | ≤ 4 <sup>1)</sup>                                             |
| <b>Number of fields</b>                          | 128                                                           |
| <b>Number of monitoring cases</b>                | 128                                                           |
| <b>Scanning angle</b>                            | 275°                                                          |
| <b>Resolution (can be configured)</b>            | 30 mm<br>40 mm<br>50 mm<br>60 mm<br>70 mm<br>150 mm<br>200 mm |
| <b>Angular resolution</b>                        | 0.1°                                                          |
| <b>Response time</b>                             | 115 ms                                                        |
| <b>Protective field supplement</b>               | 100 mm                                                        |

<sup>1)</sup> Protection, warning or contour detection fields.

### Safety-related parameters

|             |                    |
|-------------|--------------------|
| <b>Type</b> | Type 3 (IEC 61496) |
|-------------|--------------------|

|                                                                           |                                                 |
|---------------------------------------------------------------------------|-------------------------------------------------|
| <b>Safety integrity level</b>                                             | SIL 2 (IEC 61508)                               |
| <b>Category</b>                                                           | Category 3 (EN ISO 13849)                       |
| <b>Performance level</b>                                                  | PL d (EN ISO 13849)                             |
| <b>PFH<sub>D</sub> (mean probability of a dangerous failure per hour)</b> | $8.0 \times 10^{-8}$                            |
| <b>T<sub>M</sub> (mission time)</b>                                       | 20 years (EN ISO 13849)                         |
| <b>Safe state in the event of a fault</b>                                 | The safety outputs via the network are logic 0. |

## Functions

|                                          |              |
|------------------------------------------|--------------|
| <b>Restart interlock</b>                 | ✓            |
| <b>Multiple sampling</b>                 | ✓            |
| <b>Monitoring case switching</b>         | ✓            |
| <b>Simultaneous monitoring</b>           | ✓            |
| <b>Static protective field switching</b> | ✓            |
| <b>Collision protection field</b>        | ✓            |
| <b>Safe contour detection</b>            | ✓            |
| <b>Contour as a reference</b>            | ✓            |
| <b>Integrated configuration memory</b>   | ✓            |
| <b>Measured data output</b>              | Via Ethernet |

## Interfaces

|                                                |                                                                                                                                                                                                              |
|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Connection type</b>                         |                                                                                                                                                                                                              |
| Voltage supply                                 | 1 x male connector, M12, 4-pin, A-coded                                                                                                                                                                      |
| Fieldbus, industrial network                   | 2 x M12 female connectors, 4-pin, D-coded                                                                                                                                                                    |
| <b>Outputs</b>                                 |                                                                                                                                                                                                              |
| OSSD pairs                                     | 0                                                                                                                                                                                                            |
| Safety outputs via network                     | 4                                                                                                                                                                                                            |
| <b>Configuration method</b>                    | PC with Safety Designer (Configuration and Diagnostic Software)                                                                                                                                              |
| <b>Configuration and diagnostics interface</b> | USB 2.0, Mini-USB, Ethernet                                                                                                                                                                                  |
| <b>Data interface</b>                          |                                                                                                                                                                                                              |
| Services                                       | EtherNet/IP™ CIP Safety™<br>CoLa 2 (configuration and diagnostics using Safety Designer)<br>Data output<br>DHCP<br>SNMP<br>SNTP (client and server)                                                          |
| <b>Fieldbus, industrial network</b>            | EtherNet/IP™                                                                                                                                                                                                 |
| Supported protocol versions                    | Common Industrial Protocol: The CIP Networks Library Volume 1, Edition 3.20<br>EtherNet/IP™: The CIP Networks Library Volume 2, Edition 1.21<br>CIP Safety™: The CIP Networks Library Volume 5, Edition 2.13 |
| Topology support                               | DLR (Device Level Ring)                                                                                                                                                                                      |
| <b>Display elements</b>                        | Graphic color display, LEDs                                                                                                                                                                                  |

## Electrical data

|                                     |                                 |
|-------------------------------------|---------------------------------|
| <b>Protection class</b>             | III (EN 61140)                  |
| <b>Supply voltage V<sub>s</sub></b> | 24 V DC (16.8 V DC ... 30 V DC) |
| <b>Power consumption typical</b>    | 7.2 W                           |

## Mechanical data

|                                    |                                        |
|------------------------------------|----------------------------------------|
| <b>Dimensions (W x H x D)</b>      | 112 mm x 150.7 mm x 111.1 mm           |
| <b>Weight</b>                      | 1.45 kg                                |
| <b>Housing material</b>            | Aluminum                               |
| <b>Housing color</b>               | RAL 1021 (yellow), RAL 9005 (black)    |
| <b>Optics cover material</b>       | Polycarbonate                          |
| <b>Optics cover surface finish</b> | Outside with scratch-resistant coating |

## Ambient data

|                                      |                                                                                          |
|--------------------------------------|------------------------------------------------------------------------------------------|
| <b>Enclosure rating</b>              | IP65 (IEC 60529)                                                                         |
| <b>Ambient light immunity</b>        | 3,000 lx (IEC 61496-3)                                                                   |
| <b>Ambient operating temperature</b> | -10 °C ... +50 °C                                                                        |
| <b>Storage temperature</b>           | -25 °C ... +70 °C                                                                        |
| <b>Vibration resistance</b>          | IEC 60068-2-6, IEC 60068-2-64, IEC 60721-3-5, IEC TR 60721-4-3, IEC 61496-1, IEC 61496-3 |
| <b>Shock resistance</b>              | IEC 60068-2-27, IEC 60721-3-5, IEC TR 60721-4-3, IEC 61496-1, IEC 61496-3                |
| <b>EMC</b>                           | IEC 61496-1, IEC 61000-6-2, IEC 61000-6-4                                                |

## Other information


|                                    |                                              |
|------------------------------------|----------------------------------------------|
| <b>Type of light</b>               | Pulsed laser diode                           |
| <b>Wave length</b>                 | 845 nm                                       |
| <b>Detectable remission factor</b> | 1.8% to several 1000%                        |
| <b>Laser class</b>                 | 1M (21 CFR 1040.10 and 1040.11, IEC 60825-1) |

## Classifications

|                     |          |
|---------------------|----------|
| <b>ECLASS 5.0</b>   | 27272705 |
| <b>ECLASS 5.1.4</b> | 27272705 |
| <b>ECLASS 6.0</b>   | 27272705 |
| <b>ECLASS 6.2</b>   | 27272705 |
| <b>ECLASS 7.0</b>   | 27272705 |
| <b>ECLASS 8.0</b>   | 27272705 |
| <b>ECLASS 8.1</b>   | 27272705 |
| <b>ECLASS 9.0</b>   | 27272705 |
| <b>ECLASS 10.0</b>  | 27272705 |
| <b>ECLASS 11.0</b>  | 27272705 |
| <b>ECLASS 12.0</b>  | 27272705 |
| <b>ETIM 5.0</b>     | EC002550 |
| <b>ETIM 6.0</b>     | EC002550 |
| <b>ETIM 7.0</b>     | EC002550 |
| <b>ETIM 8.0</b>     | EC002550 |

|                |          |
|----------------|----------|
| UNSPSC 16.0901 | 39121528 |
|----------------|----------|


Dimensional drawing (Dimensions in mm (inch))

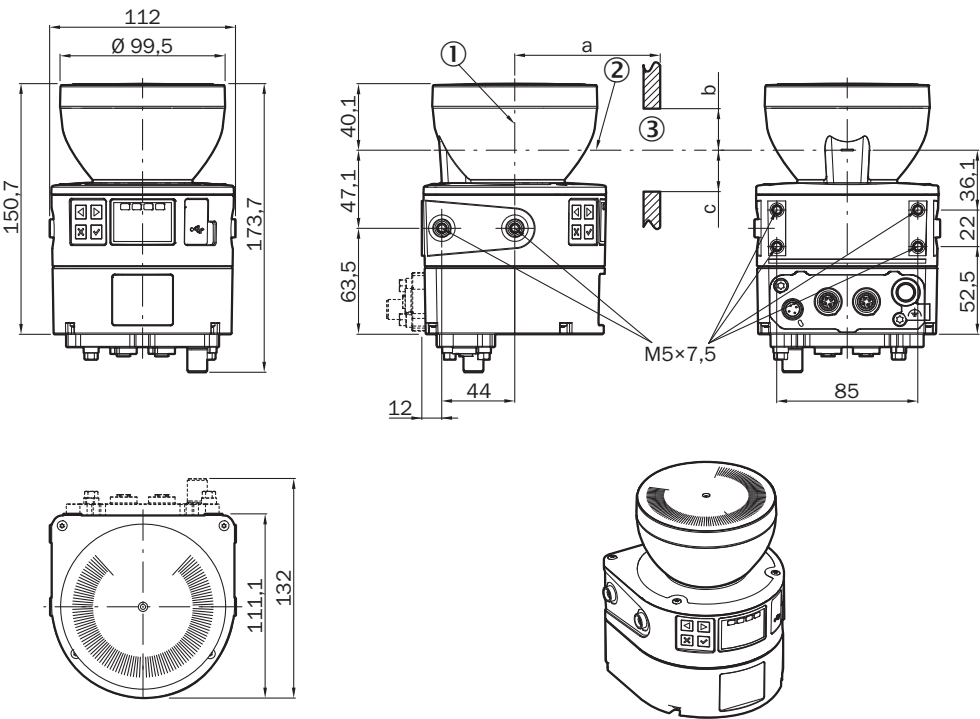

- ① Mirror axis of rotation  
② Scan plane  
③ Required viewing slit (a: length of the viewing slit, b: minimum height above the scan plane, c: minimum height below the scan plane. See the operating instructions for details.)

Pinouts


Ethernet (XF1, XF2)



| Pin    | Designation | Description    |
|--------|-------------|----------------|
| 1      | TX+         | Send data +    |
| 2      | RX+         | Receive data + |
| 3      | TX-         | Send data -    |
| 4      | RX-         | Receive data - |
| Thread | SH          | Shielding      |

For details see operating instructions

Voltage supply (XD1)



| Pin | Designation | Description                |
|-----|-------------|----------------------------|
| 1   | +24 V DC    | Supply voltage +24 V DC    |
| 2   | n.c.        | Not connected              |
| 3   | 0 V DC      | Supply voltage 0 V DC      |
| 4   | FE          | Functional earth/shielding |

For details see operating instructions

### Recommended accessories

Other models and accessories → [www.sick.com/microScan3](http://www.sick.com/microScan3)

|                                                                                     | Brief description                                                                                                                                                                                                                                                              | Type                                                     | Part no. |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|----------|
| Mounting brackets and plates                                                        |                                                                                                                                                                                                                                                                                |                                                          |          |
|   | 1 piece, mounting bracket with protection of optics hood, Stainless steel V2A (1.4301), powder-coated IGP-DURA face 5803A                                                                                                                                                      | 1b mounting kit                                          | 2074242  |
|  | 1 piece, mounting bracket, heavy-duty version, with protection cover, for floor mounting, height adjustment possible from 90 ... 310 mm, scanner tilt angle: ± 5°. Additional mounting brackets are not required. <sup>1</sup> , steel, painted (RAL 1021)                     | Heavy-duty mounting kit for floor mounting               | 2102289  |
|  | 1 piece, mounting bracket 150 mm for floor mounting of microScan3, stainless steel, Bracket and 4 x M5 screws for attaching the microScan3                                                                                                                                     | Mounting bracket 150 mm for floor mounting of microScan3 | 2112950  |
|  | 1 piece, mounting bracket 300 mm for floor mounting of microScan3, stainless steel, Bracket and 4 x M5 screws for attaching the microScan3                                                                                                                                     | Mounting bracket 300 mm for floor mounting of microScan3 | 2112951  |
|  | 1 piece, mounting bracket, Stainless steel V2A (1.4301), powder-coated IGP-DURA face 5803A                                                                                                                                                                                     | Mounting kit 1a                                          | 2073851  |
|  | 1 piece, alignment bracket, alignment with cross-wise axis and depth axis possible, distance between mounting surface and device: 22.3 mm, only in conjunction with mounting kit 1a (2073851) or 1b (2074242), Stainless steel V2A (1.4301), powder-coated IGP-DURA face 5803A | Mounting kit 2a                                          | 2073852  |
|  | 1 piece, Alignment bracket, alignment with cross-wise axis and depth axis possible, distance between mounting surface and device: 52.3 mm, only in conjunction with mounting kit 1a (2073851) or 1b (2074242), Stainless steel V2A (1.4301), powder-coated IGP-DURA face 5803A | Mounting kit 2b                                          | 2074184  |

|                                                                                     | Brief description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Type               | Part no. |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------|
| Others                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                    |          |
|    | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Male connector, M12, 4-pin, straight, D-coded</li> <li><b>Connection type head B:</b> Male connector, RJ45, 8-pin, straight</li> <li><b>Signal type:</b> Ethernet</li> <li><b>Cable:</b> 20 m, 4-wire, CAT5, CAT5e, PUR, halogen-free</li> <li><b>Description:</b> Ethernet, shielded, Head A: male connector, M12, 4-pin, straight, D coded Head B: male connector, RJ45, 8-pin, straight Cable: PUR, halogen-free, shielded, 2 x 2 x 0.14 mm<sup>2</sup>, Ø 6.4 mm</li> </ul> | SSL-2J04-G20ME60   | 6063700  |
|    | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Male connector, M12, 4-pin, angled, D-coded</li> <li><b>Connection type head B:</b> Male connector, RJ45, 8-pin, straight</li> <li><b>Signal type:</b> Ethernet</li> <li><b>Cable:</b> 20 m, 4-wire, CAT5, CAT5e, PUR, halogen-free</li> <li><b>Description:</b> Ethernet, shielded, Head A: male connector, M12, 4-pin, angled, D coded Head B: male connector, RJ45, 8-pin, straight Cable: PUR, halogen-free, shielded, 2 x 2 x 0.14 mm<sup>2</sup>, Ø 6.4 mm</li> </ul>     | SSL-2J04-H20ME     | 6063701  |
|    | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 4-pin, angled, A-coded</li> <li><b>Connection type head B:</b> Flying leads</li> <li><b>Signal type:</b> Sensor/actuator cable</li> <li><b>Cable:</b> 20 m, 4-wire, PUR, halogen-free</li> <li><b>Description:</b> Sensor/actuator cable, unshielded</li> <li><b>Application:</b> Zones with oils and lubricants, Drag chain operation, Robot</li> </ul>                                                                                                 | YG2A14-200UB3XLEAX | 2095770  |
|    | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 4-pin, angled, A-coded</li> <li><b>Connection type head B:</b> Flying leads</li> <li><b>Signal type:</b> Sensor/actuator cable</li> <li><b>Cable:</b> 2 m, 4-wire, PUR, halogen-free</li> <li><b>Description:</b> Sensor/actuator cable, unshielded</li> <li><b>Application:</b> Zones with oils and lubricants, Drag chain operation, Robot</li> </ul>                                                                                                  | YG2A14-020UB3XLEAX | 2095766  |
|   | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 4-pin, angled, A-coded</li> <li><b>Connection type head B:</b> Flying leads</li> <li><b>Signal type:</b> Sensor/actuator cable</li> <li><b>Cable:</b> 5 m, 4-wire, PUR, halogen-free</li> <li><b>Description:</b> Sensor/actuator cable, unshielded</li> <li><b>Application:</b> Zones with oils and lubricants, Drag chain operation, Robot</li> </ul>                                                                                                  | YG2A14-050UB3XLEAX | 2095767  |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 4-pin, angled, A-coded</li> <li><b>Connection type head B:</b> Flying leads</li> <li><b>Signal type:</b> Sensor/actuator cable</li> <li><b>Cable:</b> 10 m, 4-wire, PUR, halogen-free</li> <li><b>Description:</b> Sensor/actuator cable, unshielded</li> <li><b>Application:</b> Zones with oils and lubricants, Drag chain operation, Robot</li> </ul>                                                                                                 | YG2A14-100UB3XLEAX | 2095768  |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 4-pin, straight, A-coded</li> <li><b>Connection type head B:</b> Flying leads</li> <li><b>Signal type:</b> Sensor/actuator cable</li> <li><b>Cable:</b> 2 m, 4-wire, PUR, halogen-free</li> <li><b>Description:</b> Sensor/actuator cable, unshielded</li> <li><b>Application:</b> Zones with oils and lubricants, Drag chain operation, Robot</li> </ul>                                                                                                | YF2A14-020UB3XLEAX | 2095607  |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 4-pin, straight, A-coded</li> <li><b>Connection type head B:</b> Flying leads</li> <li><b>Signal type:</b> Sensor/actuator cable</li> <li><b>Cable:</b> 5 m, 4-wire, PUR, halogen-free</li> <li><b>Description:</b> Sensor/actuator cable, unshielded</li> <li><b>Application:</b> Zones with oils and lubricants, Drag chain operation, Robot</li> </ul>                                                                                                | YF2A14-050UB3XLEAX | 2095608  |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 4-pin, straight, A-coded</li> <li><b>Connection type head B:</b> Flying leads</li> <li><b>Signal type:</b> Sensor/actuator cable</li> <li><b>Cable:</b> 10 m, 4-wire, PUR, halogen-free</li> <li><b>Description:</b> Sensor/actuator cable, unshielded</li> <li><b>Application:</b> Zones with oils and lubricants, Drag chain operation, Robot</li> </ul>                                                                                               | YF2A14-100UB3XLEAX | 2095609  |

|                                                                                   | Brief description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Type               | Part no. |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------|
|  | <ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Female connector, M12, 4-pin, straight, A-coded</li> <li>• <b>Connection type head B:</b> Flying leads</li> <li>• <b>Signal type:</b> Sensor/actuator cable</li> <li>• <b>Cable:</b> 20 m, 4-wire, PUR, halogen-free</li> <li>• <b>Description:</b> Sensor/actuator cable, unshielded</li> <li>• <b>Application:</b> Zones with oils and lubricants, Drag chain operation, Robot</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | YF2A14-200UB3XLEAX | 2095611  |
|  | <ul style="list-style-type: none"> <li>• <b>Brief description:</b> The software visualizes diagnostic and device information from safety laser scanners in real time, helping to identify error causes faster and reduce maintenance time.</li> <li>• <b>Supported products:</b> All microScan3 variants (except for microScan3 Core I/O variants), outdoorScan3 Pro - EtherNet/IP</li> <li>• <b>Version:</b> 1.0</li> <li>• <b>Note:</b> With purchase, you accept the product description available under Downloads &gt; Documentation in connection with the <a href="https://www.sick.com/tools/tac/en/General-Terms-Conditions-Supply-Software-Products-AVB-Software-SICK.pdf" target="_blank">General Terms and Conditions for the Supply of Software Products (AVB Software SICK)</a>. With purchase, you accept the product description available under Downloads &gt; Documentation in connection with the <a href="https://www.sick.com/tools/tac/en/General-Terms-Conditions-Supply-Software-Products-AVB-Software-SICK.pdf" target="_blank">General Terms and Conditions for the Supply of Software Products (AVB Software SICK)</a>.</li> </ul> | SOW/VTL-LI007PCWIO | 1116788  |
|  | <ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> System plug</li> <li>• <b>Description:</b> Integrated configuration memory, System connection; voltage supply: 1 x M12 male connector, 4-pin, A-coded, Ethernet: 2 x M12 female connector, 4-pin, D-coded</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | MICSX-BANNZZZZ1    | 2086102  |



## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is “Sensor Intelligence.”**

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)