



S10B-9011DA

S100

2D LIDAR SENSORS

SICK
Sensor Intelligence.



Ordering information

Type	Part no.
S10B-9011DA	1042267

The system plug has to be ordered separately. For details, see "Accessories".

Other models and accessories → www.sick.com/S100



Detailed technical data

Features

Application	Indoor
Light source	Infrared (905 nm)
Laser class	1 (IEC 60825-1:2014, EN 60825-1:2014+A11:2021)
Aperture angle	
	Horizontal 270°
Scanning frequency	25 Hz
Angular resolution	
	Horizontal 0.5°, 1°
Working range	0 m ... 10 m
Scanning range	
	At 10% remission factor 4.5 m

Mechanics/electronics

Connection type	1 x system plug with screw terminal block (accessory)
Supply voltage	16.8 V DC ... 30 V DC
Power consumption	8 W
Output current	≤ 250 mA
Housing color	Black (RAL 9005)
Enclosure rating	IP65 (EN 60529, Section 14.2.5)
Protection class	II (VDE 0106, EN50178)
Weight	1.2 kg, without connecting cables
Dimensions (L x W x H)	105 mm x 102 mm x 152 mm
MTBF	> 100 years

Safety-related parameters

MTTF_D	> 100 years
-------------------------	-------------

Performance

Detectable object shape	Almost any (diameter: 30 mm, 40 mm, 50 mm, 70 mm, 150 mm (selectable))
Integrated application	Field evaluation
Number of field sets	16 field pairs (32 fields)
Simultaneous evaluation cases	1 (2 fields)

Interfaces

Serial	✓, RS-232
CANopen	✓
Digital inputs	5 (4 x IN, standby)
Digital outputs	5 (Q1, Q2, Q̄1, Q̄2, diagnosis)
Optical indicators	1 7-segment display (contamination warning, initial condition)

Ambient data

Object remission	1.8 % ... > 1,000 % (reflectors)
Electromagnetic compatibility (EMC)	EN 61000-6-2:2005-08
Vibration resistance	IEC 60068-2-6:2007-12
Shock resistance	IEC 60068-2-29:1987
Ambient operating temperature	-10 °C ... +50 °C
Storage temperature	-30 °C ... +70 °C

General notes


Note on use	The sensor does not constitute a safety component as defined by relevant legislation on machine safety.
--------------------	---

Classifications


ECLASS 5.0	27270990
ECLASS 5.1.4	27270990
ECLASS 6.0	27270913
ECLASS 6.2	27270913
ECLASS 7.0	27270913
ECLASS 8.0	27270913
ECLASS 8.1	27270913
ECLASS 9.0	27270913
ECLASS 10.0	27270913
ECLASS 11.0	27270913
ECLASS 12.0	27270913
ETIM 5.0	EC002550
ETIM 6.0	EC002550
ETIM 7.0	EC002550
ETIM 8.0	EC002550
UNSPSC 16.0901	41111615

Dimensional drawing (Dimensions in mm (inch))

Laser scanner

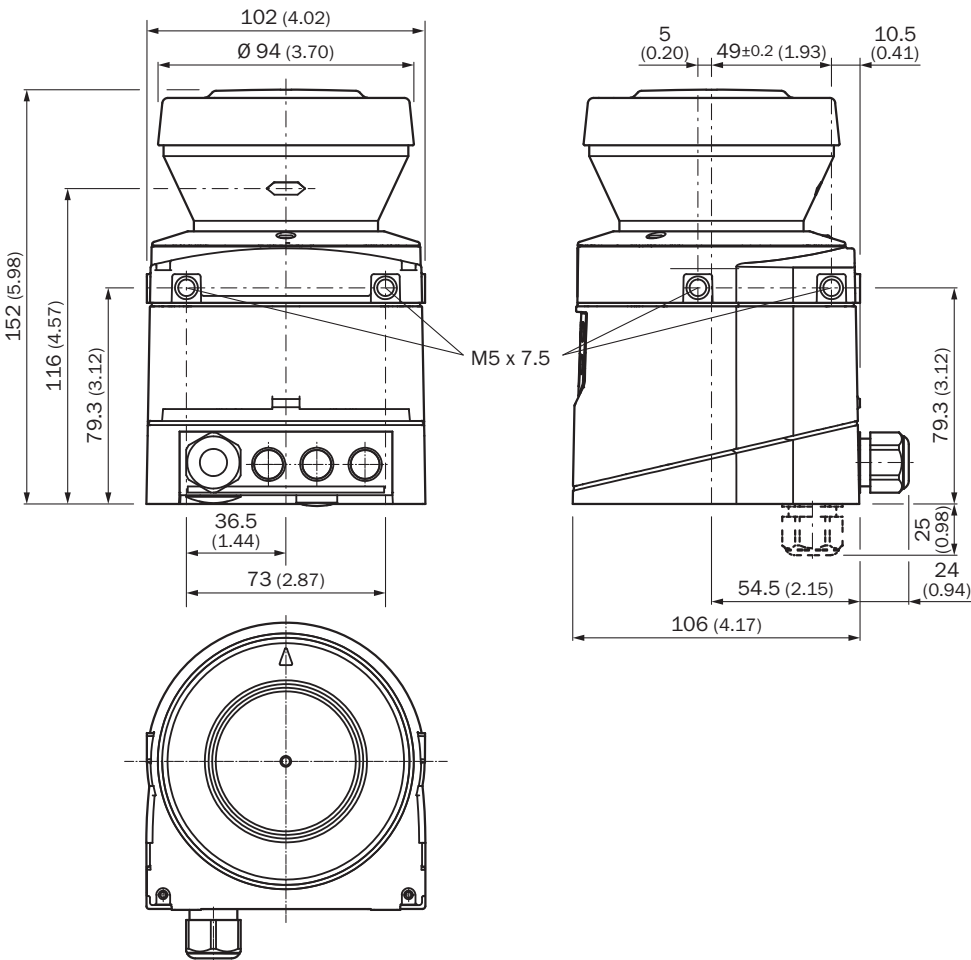


Scan plane origin

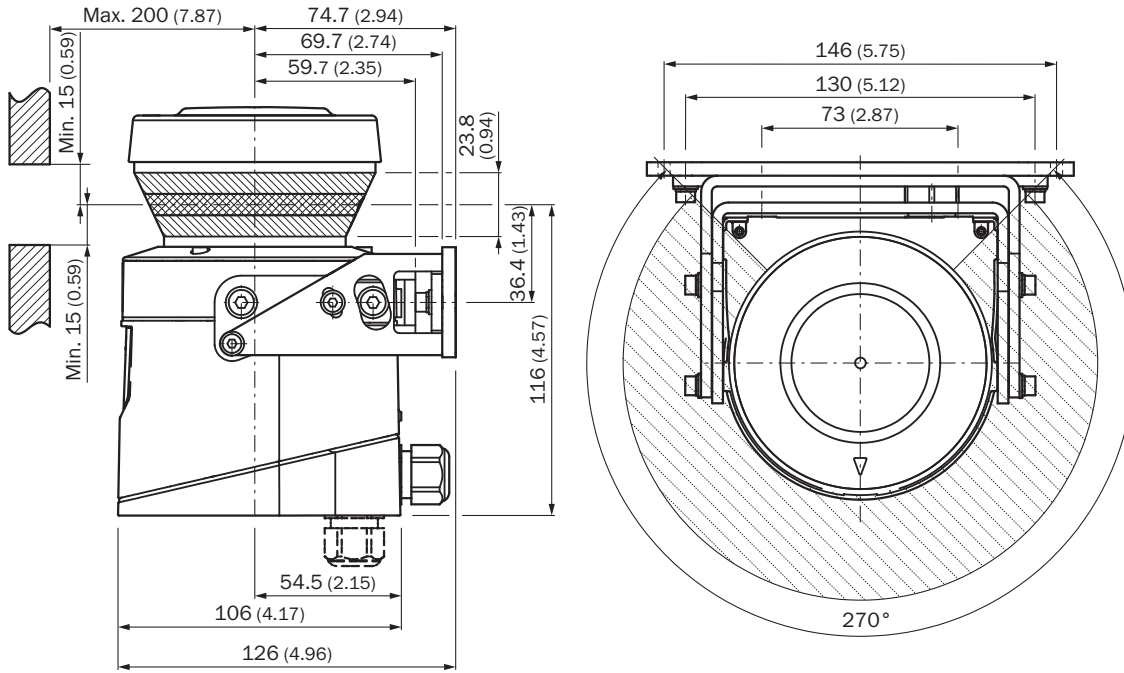

Working range diagram


Scanning range in m (ft)

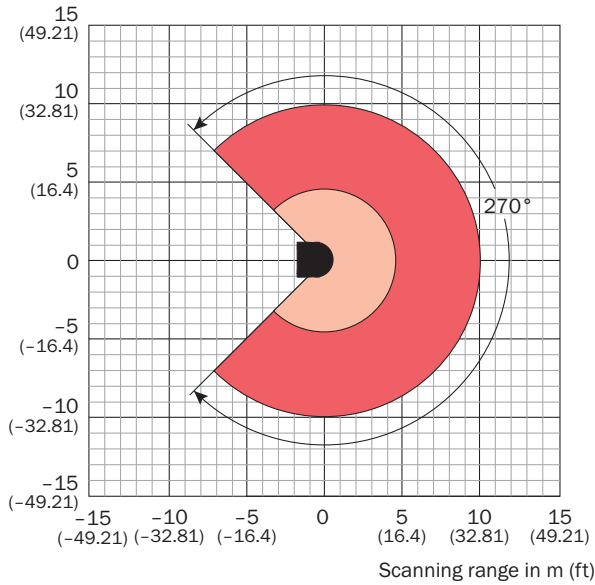

- Scanning range max. 10 m (32.81 ft)
- Scanning range for objects up to 10 % remission 4.5 m (14.76 ft)

Recommended accessories

Other models and accessories → www.sick.com/S100

	Brief description	Type	Part no.
Mounting brackets and plates			
	Description: Mounting bracket for rear mounting on wall or machine with protection of optics hood Packing unit: 1 piece	Mounting kit 1b	2034325
	Description: Mounting bracket, adjustable lateral axis, only in conjunction with mounting kit 1a (2034324) or 1b (2034325) Packing unit: 1 piece	Mounting kit 2	2039302
	Description: Mounting plate, adjustable longitudinal axis, only in conjunction with mounting kit 2 (2039302) Packing unit: 1 piece	Mounting kit 3	2039303
Others			
	Connection type head A: Male connector, M8, 4-pin, straight Connection type head B: Male connector, USB-A, straight Cable: 2 m, 4-wire, PVC Description: Unshielded, Configuration cable with integrated RS-232 transducer on USB for connecting a sensor configuration connection (M8, 4-pin) to the USB interface of a PC	DSL-8U04G02M025KM1	6034574
		PS50W-24V	7028789
		SX0B-B1510G	2034265

Recommended services

Additional services → www.sick.com/S100

	Type	Part no.
Maintenance		
Product area: 2D LiDAR sensors, 3D LiDAR sensors Range of services: Inspection, analysis and restoring of defined functions, Inspection and adaptation of basic settings, parameters of field application, filters for raw data output, and product-specific configuration Duration: Additional work will be invoiced separately	Maintenance of LiDAR sensors	1682593
Commissioning		
Product area: 2D LiDAR sensors, 3D LiDAR sensors Range of services: Inspection of connection, fine adjustment, configuration of monitored areas, configuration and optimization of parameters as well as tests, Setup of previously defined functions of basic settings, parameters of field application, filters for raw data output and product-specific configuration Duration: Additional work will be invoiced separately	Commissioning LiDAR sensors	1680672

	Type	Part no.
Extended warranty		
• Product area: Machine vision, LiDAR sensors, safety camera sensors, Safety laser scanners, Safety radar sensors, Radar sensors, Fixed mount barcode scanners, Image-based code readers, RFID, Mobile handheld scanners • Range of services: The services correspond to the scope of the statutory warranty (SICK General Terms of Delivery) • Duration: Five-year warranty from delivery date.	Extended warranty for a total of five years from delivery date	1680671

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com