

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

SCHOOL MILK COLD WALL COOLER

SM58HC Single Access Cooler Hydrocarbon Series

MODEL: SM58HC-W



7 Year Parts/Labor Warranty 7 Year Compressor Warranty

CABINET CONSTRUCTION

- White coated steel exterior
- Interior features a one-piece, stainless steel back, front, floor with galvanized side walls for maximum milk crate support
- Stainless steel lids, hinged door and door latches
- Full electronic control
- Heavy-duty epoxy coated steel wire floor racks standard
- Floor drain is centrally located for easy cleaning, connecting to drain hose with hose adapter
- Flexible compression door gaskets, ensures a tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder lock
- 4" Heavy-duty plate casters (2 with locks)
- Cold wall milk coolers are designed to hold product temperature during service. Product should be removed at the end of service and moved to long-term, refrigerated storage

OPTIONS & ACCESSORIES

- Stainless steel interior on white models -02
- Corner bumpers
- · Cafeteria tray slides
- Graphics

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Maintains product temperature between 36°F to 40°F








MODEL	SM58HC-W	
EXTERNAL DIMENSIONAL DATA		
Width Overall (in)	58"	
Depth Overall (in)	30 %"	
Height Overall with Casters (in)	41 1/8"	
Number of Lids/Doors	Single Access	
Depth with Door Open 90° (in)	45 ½"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	22.63	
Internal Width Overall (in)	55"	
Internal Depth Overall (in)	27"	
Internal Height Overall (in)	25 ¾"	
CASE CAPACITY		
13" X 13" X 11"	16	
19" X 13" X 11"	10	
ELECTRICAL DATA		
Full Load Amperes	2.2	
Voltage	115/60/1	
Nema Plug (8' cord)	5-15P	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)	1434	
Heat Rejection (BTU/Hr)	2151	
Charge (lbs/grams/ounces)	0.1656 / 75 / 2.65	
SHIPPING DATA		
Gross Weight	376 lbs	
Height - Crated	48"	
Width - Crated	61"	
Depth - Crated	34"	

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

School Milk Cooler - Single Access

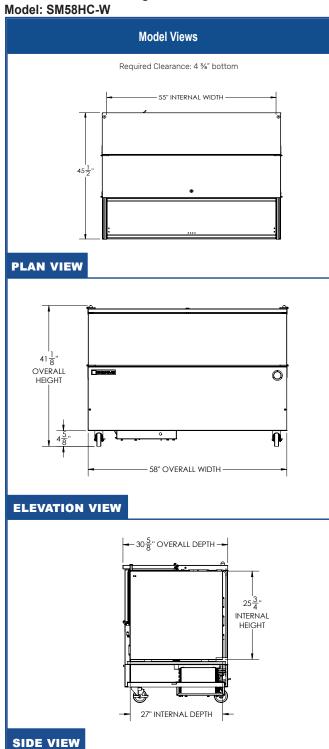



ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord 115/60/1 and include 8' NEMA 5-15P and plug set.

