

{14.01}

Security Units Super Erecta® & MetroMax®



Security Units Super Erecta® & MetroMax® provide **safe storage** and protects valuable materials and sensitive items from loss or pilferage.

Microban® Antimicrobial Product Protection*: Metroseal Green and MetroMax Q models feature Microban Antimicrobial Product Protection that helps fight the growth of stain and odor-causing bacteria to keep product cleaner between cleanings.

Ready View of Contents: Heavy-gauge open wire construction keeps the entire contents of the unit visible at all times, making it easy to check inventory.

Adjustable, Optional Intermediate Shelves: Patented, easily adjustable shelf designs — Super Erecta EZ-ADD, Super Adjustable Super Erecta, and MetroMax Q — allow flexibility to meet changing needs. Can be positioned in 1" (25 mm) increments along the entire height of post.

Choose from Stationary or Mobile Standard and Heavy-Duty Configurations:

Safe Transportation: Mobile, security trucks provide the advantage of quick, protective transportation.

Easy Cleaning of Storage Areas: Mobile units move easily from walls to allow thorough cleaning of floors and walls.

Mobile Units: Available in Standard and Heavy-Duty models Heavy-Duty units offer increased rigidity and durability for applications such as crossing thresholds.

Time Saving Assembly: Metro security units assemble quickly — right out of the box.

Shipped Knocked-Down: Saves on freight

Door Options

Hinged Doors: Each door opens 270 degrees and can be secured along the sides of the unit with a patented 1/4 turn door handle locking system that accommodates a pad lock.


Sliding Doors: Each door slides over each other to save aisle space and has a flip lock that accommodates a pad lock. Perfect for use in Top-Track & qwikTRAK applications.

Locking

Standard Pad lock: Not included



Super Erecta® Chrome
Mobile Security

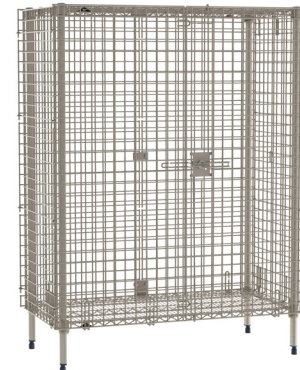

MetroMax® Q
Stationary Security



Super Erecta
Sliding Door Security



Super Erecta
Heavy Duty Security
with a dolly base and optional
intermediate shelves.



NOTE: Super Erecta and MetroMax options are NSF Listed.

All Metro Catalog Sheets are available on our website: metro.com

Super Erecta® Security Units

Units DO NOT include intermediate shelves.
Intermediate shelves must be ordered separately.

Super Erecta Shelf Stationary Security

Hinge Style Doors

Cat. No. Chrome	Cat. No. Metroseal Green	Cat. No. Stainless Steel	Width in. mm	Length in. mm	Height in. mm	Fits Shelf in. mm	Approx. Pkd. Wt. lbs. kg
SEC33C	SEC33K3	SEC33S	21 1/2 546	38 1/2 980	66 13/16 1695	18x36 457x914	140 64
SEC35C	SEC35K3	SEC35S	21 1/2 546	50 1/2 1295	66 13/16 1695	18x48 457x1219	159 72
SEC53C	SEC53K3	SEC53S	27 1/4 692	38 1/2 980	66 13/16 1695	24x36 610x914	156 71
SEC55C	SEC55K3	SEC55S	27 1/4 692	50 1/2 1295	66 13/16 1695	24x48 610x1219	176 80
SEC56C	SEC56K3	SEC56S	27 1/4 692	62 1/2 1587	66 13/16 1695	24x60 610x1524	197 90
SEC63C		SEC63S	33 1/2 851	38 1/2 980	66 13/16 1695	30x36 760x914	169 77
SEC65C		SEC65S	33 1/2 851	50 1/2 1295	66 13/16 1695	30x48 760x1219	195 89
SEC66C		SEC66S	33 1/2 851	62 1/2 1587	66 13/16 1695	30x60 760x1524	217 99

Sliding Doors

SEC55C-SL	SEC55K3-SL	SEC55S-SL	28 1/2 724	50 1/2 1295	66 13/16 1695	24x48 610x1219	176 80
SEC56C-SL	SEC56K3-SL	SEC56S-SL	28 1/2 724	62 1/2 1587	66 13/16 1695	24x60 610x1524	197 90

Super Erecta Shelf Mobile Security

Standard-Duty Stem Caster Models: feature 5" (127mm) swivel casters. Please note model numbers for specific caster types.

Hinge Style Doors

Cat. No. Chrome with (2) 5MP / (2) 5MPB casters	Cat. No. Metroseal Green with (2) 5MP / (2) 5MPB casters	Cat. No. Metroseal Green with (2) 5PC / (2) 5PCB Casters	Width in. mm	Length in. mm	Height in. mm	Fits Shelf in. mm	Approx. Pkd. Wt. lbs. kg
SEC33EC	SEC33EK3	SEC33VK3	21 1/2 546	40 3/4 1035	68 1/2 1740	18x36 457x914	148 67
SEC35EC	SEC35EK3	SEC35VK3	21 1/2 546	52 3/4 1340	68 1/2 1740	18x48 457x1219	167 76
SEC53EC	SEC53EK3	SEC53VK3	27 1/4 692	40 3/4 1035	68 1/2 1740	24x36 610x914	164 75
SEC55EC	SEC55EK3	SEC55VK3	27 1/4 692	52 3/4 1340	68 1/2 1740	24x48 610x1219	184 84
SEC56EC	SEC56EK3	SEC56VK3	27 1/4 692	65 1651	68 1/2 1740	24x60 610x1524	205 93
SEC63EC	-	-	33 1/2 851	40 3/4 1035	68 1/2 1740	30x36 760x914	177 81
SEC65EC	-	-	33 1/2 851	52 3/4 1340	68 1/2 1740	30x48 760x1219	204 93
SEC66EC	-	-	33 1/2 851	65 1651	68 1/2 1740	30x60 760x1524	225 102

Sliding Doors

SEC55EC-SL	SEC55EK3-SL	SEC55VK3-SL	28 1/2 724	52 3/4 1340	68 1/2 1740	24x48 610x1219	184 84
SEC56EC-SL	SEC56EK3-SL	SEC56VK3-SL	28 1/2 724	65 1651	68 1/2 1740	24x60 610x1524	205 93

Casters: 5MP and 5MPB (with locking brake) feature a polyurethane tread.

5PC and 5PCB (with locking brake) casters feature a polymer horn and resist rusting. They are recommended for high-moisture environments.

Stainless Steel: Casters must be ordered separately on "-SD" models.

Hinge Style Doors

Cat. No.	Description	Width in. mm	Length in. mm	Height in. mm	Fits Shelf in. mm	Approx. Pkd. Wt. lbs. kg
SEC33S-SD	Standard Duty	21 1/2 546	40 3/4 1035	62 1575	18x36 457x914	140 64
SEC35S-SD	Standard Duty	21 1/2 546	52 3/4 1340	62 1575	18x48 457x1219	159 72
SEC53S-SD	Standard Duty	27 1/4 692	40 3/4 1035	62 1575	24x36 610x914	156 71
SEC55S-SD	Standard Duty	27 1/4 692	52 3/4 1340	62 1575	24x48 610x1219	176 80
SEC56S-SD	Standard Duty	27 1/4 692	65 1651	62 1575	24x60 610x1524	197 90
SEC63S-SD	Standard Duty	33 1/2 851	40 3/4 1035	62 1575	30x36 760x914	169 77
SEC65S-SD	Standard Duty	33 1/2 851	52 3/4 1340	62 1575	30x48 760x1219	195 89
SEC66S-SD	Standard Duty	33 1/2 851	65 1651	62 1575	30x60 760x1524	217 99

Sliding Doors

SEC55S-SD-SL	Standard Duty	28 1/2 724	52 3/4 1340	62 1575	24x48 610x1219	176 80
SEC56S-SD-SL	Standard Duty	28 1/2 724	65 1651	62 1575	24x60 610x1524	197 90

Heavy-Duty Models: feature aluminum dollies with wraparound bumpers and 5" (127mm) diameter casters.

Cat. No. Chrome	Cat. No. Metroseal Green	Caster Type	Width in. mm	Length in. mm	Height in. mm	Fits Shelf in. mm	Approx. Pkd. Wt. lbs. kg
SEC53LC	SEC53LK3	(2) B5P/B5PB	28 1/16 713	38 1/2 980	68 1/2 1740	24x36 610x914	189 86
SEC55LC	SEC55LK3	(2) B5P/B5PB	28 1/16 713	50 1/2 1285	68 1/2 1740	24x48 610x1219	212 96
SEC56LC	SEC56LK3	(2) B5P/B5PB	28 1/16 713	63 1/8 1600	68 1/2 1740	24x60 610x1524	237 108

NOTE: Given height is for unit without dolly or casters (depending on model chosen). For approximate overall unit height add chosen caster diameter plus 1" (25mm).

CAUTION: Large casters can create a tipping hazard. On 18" (457mm) security units, do not use casters larger than 5" (127mm) in diameter.

MetroMax® Security Units

- Optional intermediate shelves: MetroMax Q quick adjust shelves or corrosion proof MetroMax i. Microban antimicrobial product protection is built into the shelf mats only.
- Standard Units consist of taupe epoxy coated top and bottom wire shelves, tri-lobal steel posts, wire enclosures, and doors. Casters and bumpers are included with mobile units. Intermediate shelves are sold separately.
- Grid openings: 13/4" x 13/4" (44 x 44mm).

Units DO NOT include intermediate shelves.
Intermediate shelves must be ordered separately.

MetroMax Stationary Units — 66 3/16" (1681mm) High

Actual Outside Dimensions (including handle)

Hinge Style Doors

Cat. No.	Width in. mm	Length in. mm	Fits Shelf in. mm	Approx. Pkd. Wt. lbs. kg
MQSEC53E	26 15/16 685	38 7/8 987	24 x 36 610 x 914	150 68
MQSEC55E	26 15/16 685	50 7/8 1292	24 x 48 610 x 1219	158 72
MQSEC56E	26 15/16 685	62 7/8 1597	24 x 60 610 x 1524	163 74

Sliding Doors

MQSEC55E-SL	26 15/16 685	50 7/8 1292	24 x 48 610 x 1219	158 72
MQSEC56E-SL	26 15/16 685	62 7/8 1597	24 x 60 610 x 1524	163 74

Note: Leveling foot on post can be adjusted up to 1" (25mm) to compensate for uneven floors.



MetroMax® Security
with hinge doors.

MetroMax Stem Caster Mobile Units — 67 13/16" (1723mm) High

Actual Outside Dimensions
(including bumpers and handle)

Hinge Style Doors

Cat. No. w/ 5" (127mm) diameter casters	Width in. mm	Length in. mm	Fits Shelf in. mm	Approx. Pkd. Wt. lbs. kg
MQSEC53VE	27 13/16 707	40 3/4 1035	24x36 610x914	168 76
MQSEC55VE	27 13/16 707	52 3/4 1340	24x48 610x1219	178 81
MQSEC56VE	27 13/16 707	64 3/4 1645	24x60 610x1524	181 82

Sliding Doors

MQSEC55VE-SL	27 13/16 707	52 3/4 1340	24x48 610x1219	178 81
MQSEC56VE-SL	27 13/16 707	64 3/4 1645	24x60 610x1524	181 82

Note: Caster units use two 5PCX and two PCSX casters.



MetroMax® Security
with sliding doors

MetroMax Heavy-Duty Mobile Units — 68.5" (1740mm) High

Mounted on aluminum dolly with 5" (127mm) plate casters and wraparound bumpers.

Actual Outside Dimensions
(including handle)

Cat. No.	Each	Width in. mm	Length in. mm	Fits Shelf in. mm	Approx. Pkd. Wt. lbs. kg
MQSEC53LE	2,104.50	28.06 713	39.13 994	24x36 610x914	166 75
MQSEC55LE	2,521.00	28.06 713	51.13 1299	24x48 610x1219	176 80
MQSEC56LE	2,712.50	28.06 713	63.13 1603	24x60 610x1524	179 81

Note: The aluminum dollies used on the LE models have two B5P and two B5PB plate casters.

Replacement Tri-Lobal Adapters for MetroMax Wire Security Shelves

Model No.
MTLA* - Four pair per bag

*Not compatible with MetroMax Q security units manufactured prior to May 2009. For older MetroMax Q security units, use MQ9985 wedges if replacements are needed for the wire shelves.



Intermediate Shelves for Security Units

Units **DO NOT** include intermediate shelves.
Intermediate shelves must be ordered separately.

Intermediate Shelves for Super Erecta Shelf Security Units

Chrome	Metroseal Green	Super Erecta Pro	Stainless Steel	EZ-ADD Chrome	EZ-ADD Metroseal Green	Super Adjustable Chrome	Super Adjustable Metroseal Green	Super Adjustable Stainless Steel	Width in.	Width mm	Length in.	Length mm
1836NC	1836NK3	PR1836NK3	1836NS	EZA-1836NC	EZA-1836NK3	A1836NC	A1836NK3	A1836NS	18	457	36	914
1848NC	1848NK3	PR1848NK3	1848NS	EZA-1848NC	EZA-1848NK3	A1848NC	A1848NK3	A1848NS	18	457	48	1219
2436NC	2436NK3	PR2436NK3	2436NS	EZA-2436NC	EZA-2436NK3	A2436NC	A2436NK3	A2436NS	24	610	36	914
2448NC	2448NK3	PR2448NK3	2448NS	EZA-2448NC	EZA-2448NK3	A2448NC	A2448NK3	A2448NS	24	610	48	1219
2460NC	2460NK3	PR2460NK3	2460NS	EZA-2460NC	EZA-2460NK3	A2460NC	A2460NK3	A2460NS	24	610	60	1524
3036NC	3036NK3	PR3036NK3	3036NS	-	-	-	-	-	30	760	36	914
3048NC	3048NK3	PR3048NK3	3048NS	-	-	-	-	-	30	760	48	1219

EZ-ADD Wire Shelves

- EZ-ADD Shelves can be added to any wire security unit without dismantling the unit. Shelves can be easily repositioned for your storage needs.



Intermediate Shelves for MetroMax Security Units

Shelf with Grid Mat Cat. No.	Shelf with Grid Mat Cat. No.	Shelf with Grid Mat Cat. No.	Width in.	Width mm	Length in.	Length mm
MX2436G	MAX4-2436G	MQ2436G	24	610	36	914
MX2448G	MAX4-2448G	MQ2448G	24	610	48	1219
MX2460G	MAX4-2460G	MQ2460G	24	610	60	1524

Sliding Door Retrofit Kits


- Easily convert a hinged door unit to a sliding door unit. Hardware included.
- Door kits recommended for 24" deep units only.
- Kit includes: sliding doors, set of polymer post brackets, top & bottom tracks, upper track cover, side panel clamps, and installation hardware. (Pad lock not included)

Super Erecta Sliding Door Retro Fit Kits

Cat. No.	Finish	Fits Units	Description
SEC55C-SLKIT	Chrome	48" long	SES-Sliding Door-Chrome-48 W Unit
SEC56C-SLKIT	Chrome	60" long	SES-Sliding Door-Chrome-60 W Unit
SEC55K3-SLKIT	Metroseal Green	48" long	SES-Sliding Door-Metroseal 3-48 W Unit
SEC56K3-SLKIT	Metroseal Green	60" long	SES-Sliding Door-Metroseal 3-60 W Unit
SEC55S-SLKIT	Stainless	48" long	SES-Sliding Door-Stainless-48 W Unit
SEC56S-SLKIT	Stainless	60" long	SES-Sliding Door-Stainless-60 W Unit

MetroMax Sliding Door Retro Fit Kits

Cat. No.	Finish	Fits Units	Description
MQSEC55-SLKIT	Taupe Epoxy	48" long unit	MAX-Sliding Door-MetroMaxQ-48 W Unit
MQSEC56-SLKIT	Taupe Epoxy	60" long unit	MAX-Sliding Door-MetroMaxQ-60 W Unit

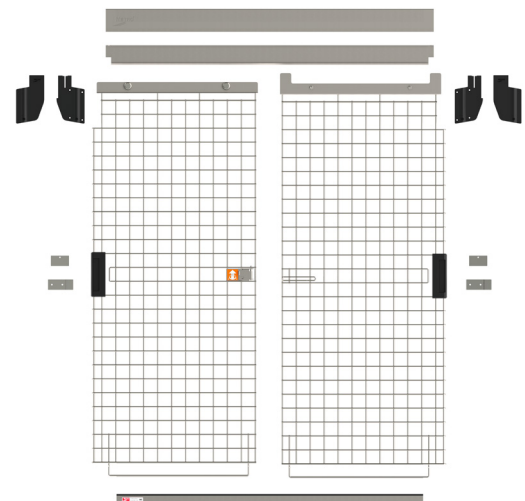

Adding SlideSecure to Top-Track

STEP 1 Refer to the following spec sheets for track shelving components:

- Top-Track for Super Erecta **11.12**
- MetroMax Top-Track High Density Storage System **9.29**

STEP 2 Choose one kit for each security unit.

Super Erecta SlideSecure Kit

Includes end panels, back panels, sliding doors, and the rail kit.

Super Erecta

Cat. No. Chrome	Cat. No. Metroseal Green	Cat. No. Stainless Steel	Width in.	Width mm	Length in.	Length mm	Fits Shelf in.	Fits Shelf mm
SEC55-CTN1B-SL	SEC55K3-CTN1B-SL	SEC55S-CTN1B-SL	28½	724	50½	1295	24x48	610x1219
SEC56-CTN1B-SL	SEC56K3-CTN1B-SL	SEC56S-CTN1B-SL	28½	724	62½	1587	24x60	610x1524

STEP 3 Choose a minimum of 2 shelves for each security unit.

Super Erecta Security Shelves

Each security unit must include at least three shelves: one for the top and bottom of the assembly, and an additional shelf above the cage to ensure proper stability in the Top-Track system. Additional intermediate shelves can be added.

Cat. No. Chrome	Cat. No. Metroseal Green	Cat. No. Stainless Steel	Width in.	Width mm	Length in.	Length mm
2448NC	2448NK3	2448NS	24	610	48	1219
2460NC	2460NK3	2460NS	24	610	60	1524

OR

STEP 2 Choose one kit for each security unit.

MetroMax SlideSecure Kit

Includes end panels, back panels, sliding doors, and the rail kit.

MetroMax

Cat. No. MetroMax	Width in.	Width mm	Length in.	Length mm	Fits Shelf in.	Fits Shelf mm
MQSEC55-CTN1B-SL	26 ¹⁵ / ₁₆	685	50½	1295	24x48	610x1219
MQSEC56-CTN1B-SL	26 ¹⁵ / ₁₆	685	62½	1587	24x60	610x1524

STEP 3 Choose 2 shelves for each security unit.

MetroMax Security Shelves

These shelves are specific to the MetroMax security units and must be installed as the top and bottom assembly for proper mounting of the enclosure panels. An additional shelf must be ordered for above the cage to ensure proper stability in the Top-Track system. Intermediate shelves must be ordered separately.

Cat. No. MetroMax	Width in.	Width mm	Length in.	Length mm
RPMQSEC55-SHF	24	610	48	1219
RPMQSEC56-SHF	24	610	60	1524

STEP 4

Bumpers

Bumpers must be installed in top-track in the following scenarios:

- SlideSecure security end unit must use (1) upper track bumper set
- SlideSecure security mobile unit must use (1) bottom bumper set per mobile unit



SECSL-UPBMPRSET
Upper Track Bumper Set




SECSL-24BMPRSET
24" SS Bottom Bumper Set



Super Erecta® Security Module

Only for Standard 24" (610mm) Wide Super Erecta Shelf Wire Units.

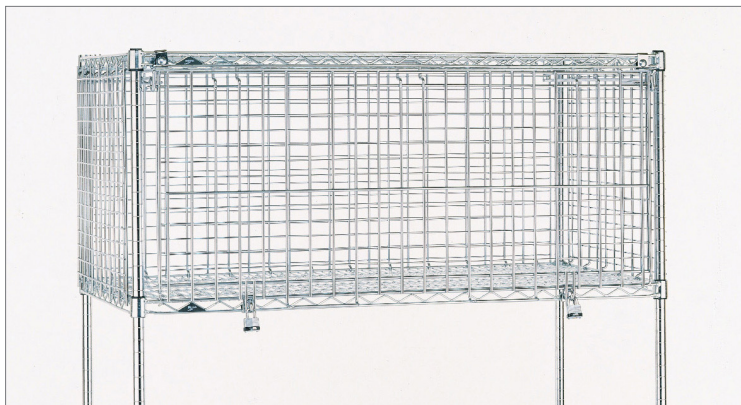

- Designed to convert a standard 24" (610 mm) wide unit into a combination of open and lockable shelving through the use of a kit.
- **Kit Includes:** Two end panels, one back panel and one door and slides. Fits between any two shelves spaced 20" (510 mm) apart on any Super Erecta Shelf Wire Unit with 24" (610 mm) wide shelves in 30", 48" and 60" (762, 1219 and 1524 mm) lengths.
- **Versatile:** Security Modules enclose only one section of the shelving unit, leaving the rest open for conventional use. Depending upon your needs, more than one Security Module can be used on the same shelving unit.
- **Ready View of Contents:** As with Metro's Security Trucks and Stationary Security Units, the heavy-gauge, open-wire construction of the Security Module keeps contents visible at all times, and makes inventory easy.
- **Convenient Door:** Has hasps for two padlocks and, when opened, slides under the upper shelf conveniently out of the way.
- **Choice of finishes:** Durable Chrome-Plated and Stainless Steel.

Note: Security Modules can be installed on 24" (610mm) wide Super Erecta Shelf wire shelves only. When multiple security modules are stacked on one shelving unit, separate top and bottom shelves are still necessary for each module.



Two Security Modules on Stationary Unit

Super Erecta Security Module Kits

Cat. No. Chrome	Cat. No. Stainless Steel	Length		Width		Height		Approx. Pkd. Wt.	
		in.	mm	in.	mm	in.	mm	lbs.	kg
SECM2430NC	SECM2430NS	30	760	24	610	20	510	29.5	14
SECM2448NC	—	48	1219	24	610	20	510	39.75	18
SECM2460NC	—	60	1524	24	610	20	510	45.75	21



Security Units Super Erecta® & MetroMax®

Utility Cart Secure Storage

Corrosion Proof Model in Stainless Steel

- Corrosion Proof: Features stainless steel wire and solid shelves, security module, and posts.
- Easy to Maneuver: Includes two 5MP swivel casters and two 5MPB swivel/brake casters.
- Solid top shelf with raised ship's edge is ideal for use as a work surface and can contain unwanted spills
- Easy assembly in minutes.




Super Erecta Security Module Kits

Cat. No.	Width		Length		Height		Load Rating		Approx. Pkd. Wt.	
	in.	mm	in.	mm	in.	mm	lbs.	kg	lbs.	kg
SECMLAB	24	610	30	760	39	990	600	273	85	38.6

Other finishes and configurations are available:

Similar units can be constructed using chrome-plated components and galvanized solid Super Erecta shelves. Refer to the security modules on the previous page, and pair them with Metro SP series wire carts or your own combination of SES posts and shelves, for a customized solution. Security modules must be placed between two wire shelves.

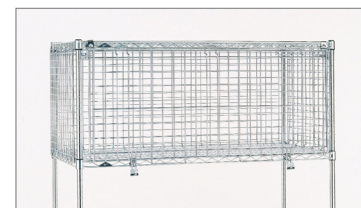

Technical Information and Recommended Usage Guidelines for Security Units

Shelves:

- Solid shelves cannot be used as the top or bottom shelf on a security unit. For those applications requiring a solid bottom surface, Super Erecta Shelf inlays are recommended.
- It is recommended that standard Super Erecta shelves are used for the top and bottom shelves on a Super Erecta security unit.

Security Enclosure Panels:

- Grid spacing measures 13/4" x 13/4" (44 x 44mm).
- The distance from the top of the top shelf to the top of the bottom shelf measures approximately 57" (1448mm).

Mobile Units:

- 18" (457mm) deep security units must be used with casters that have a diameter of 5" (127mm) or less.
- Order aluminum split sleeves with c-rings for use with the top and bottom SES shelves of a mobile unit for applications that require a more rigid assembly. (9986Z for aluminum sleeves with zinc c-rings; 9986S for aluminum sleeves with stainless c-rings)

Use with other Metro components:

- Tray slides (15SNC, 20SNC) measure approximately 23" (584mm) in height. A standard security unit can accommodate 2 levels of these tray slides.

- Metro's brake/lock plate caster system can be used with 24" (610mm) deep security mobile units featuring a dolly base.
- Solid SES shelves can be used as interior shelves on a security unit. Wire shelves must be used as the top and bottom shelves.
- A push handle is available through Custom Engineering for the 24" (610mm) deep SES security units (subject to custom order minimums). Handle is available in chrome finish (Part # CC2835N).