

Channel Dunnage Racks

Standard Features & Benefits

- ◆ "E" Channels are 4" wide to give better support to products
- ◆ Meets NSF specification for use in walkin coolers and freezers
- ◆ Stationary units are 8" and 12" high, check with your local health department for code
- ◆ Channel has less than 3" spacing between cross braces to give better support to product
- ◆ Minimum Load Capacity:
 - Gusset Leg 2500 lbs.
 - Tubular Leg 2000 lbs.
 - Mobile 2000 lbs
- ◆ Gusset leg will take side impact
- ◆ Gusset leg designed for correctional use
- ◆ Mobile unit rolls on 6" x 2" plate casters, which will not snap off like stem casters
- ◆ Maximize your storage space with a spanner rack



DRC362012



DRC2436MHD/HD24
Mobile Unit w/Optional Handle



Spanner Rack for Dunnage Racks

Customize your space to maximize your space add a spanner

Options:

- /MHD 6" Heavy duty plate casters, 2 swivel with brakes and 2 rigid
- /4S 4 Swivel plate casters
- SPANNER RACK
 - DRB2420
 - DRB3620
 - DRB2424
 - DRB3624

Model:

- DRC
- DRCGL
- DRC/MHD

Approved For
Correctional Use

Job Name: _____

Qty: _____

Item: _____

814 Jordan Lane, Decatur, GA 30033
404-296-9080 1-800-810-9080 Fax: 404-296-3040



Specifications:

CONSTRUCTION:

Constructed of heavy duty type 6063 aluminum.

SHELF:

Constructed of a rectangular frame of 1½" x 1½" x .062 heavy wall aluminum tube. "E" style channel welded horizontal to the frame 2 piece on 18" or 20" and 3 piece on 24" wide unit.

LEGS:

Legs are 1½" x 1½" x .062 mitered with welded aluminum feet.

GUSSETED LEG:


Constructed of a formed .125 aluminum sheet with flanged foot. Top is continuous welded to frame forming 6" x 6" V.

HANDLE:

Constructed of 1.315 round handle tube with reinforced gusset.

CASTERS ON MOBILE UNIT:

Units feature a plate caster with a polyolifin 6" x 2" wheel, with zinc fitting.

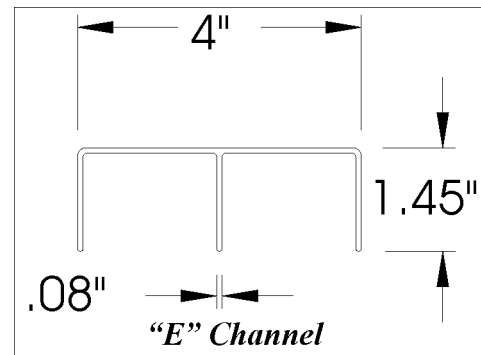

Gusset Leg(DRCGL) Option

| WIDTH | 8" KEG | 12" LEG | LxW | WGT | MODEL | LxW | WGT |
|---|------------|-------------|-------|-----|--|-------|-----|
| GUSSET LEG DUNNAGE RACKS - CHANNEL | | | | | HEAVY DUTY MOBILE DUNNAGE RACKS | | |
| 36" | DRCGL36208 | DRCGL362012 | 36x20 | 9 | DRC2024MHD | 24x20 | 26 |
| | DRCGL36248 | DRCGL362412 | 36x24 | 11 | DRC2030MHD | 30x20 | 29 |
| 48" | DRCGL48208 | DRCGL482012 | 48x20 | 11 | DRC2036MHD | 36x20 | 33 |
| | DRCGL48248 | DRCGL482412 | 48x24 | 14 | DRC2042MHD | 42x20 | 36 |
| 60" | DRCGL60208 | DRCGL602012 | 60x20 | 14 | DRC2048MHD | 48x20 | 39 |
| | DRCGL60248 | DRCGL602412 | 60x24 | 7 | DRC2054MHD | 54x20 | 42 |
| CHANNEL DUNNAGE RACKS | | | | | DRC2060MHD | 60x20 | 45 |
| 24" | DRC24208 | DRC242012 | 24x20 | 9 | DRC2424MHD | 24x24 | 29 |
| | DRC24248 | DRC242412 | 24x24 | 9 | DRC2430MHD | 30x24 | 32 |
| 36" | DRC36188 | DRC361812 | 36x18 | 10 | DRC2436MHD | 36x24 | 36 |
| | DRC36208 | DRC362012 | 36x20 | 10 | DRC2442MHD | 42x24 | 42 |
| | DRC36248 | DRC362412 | 36x24 | 11 | DRC2448MHD | 48x24 | 45 |
| 48" | DRC48188 | DRC481812 | 48x18 | 12 | DRC2454MHD | 54x24 | 48 |
| | DRC48208 | DRC482012 | 48x20 | 12 | DRC2460MHD | 60x24 | 52 |
| | DRC48248 | DRC482412 | 48x24 | 15 | | | |
| | DRC48368/6 | DRC483612/6 | 48x36 | 18 | | | |
| 60" | DRC60188 | DRC601812 | 60x18 | 15 | | | |
| | DRC60208 | DRC602012 | 60x20 | 15 | | | |
| | DRC60248 | DRC602412 | 60x24 | 18 | | | |

Options:

- /H20 20" Handle
- /H24 24" Handle



814 Jordan Ln. Decatur, GA 30033

404-296-9080 1-800-810-9080 Fax: 404-296-3040

www.kelmax.com