

PROJECT NAME: _____ LOCATION: _____

ITEM: _____ MODEL: _____

Undercounter Freezer



CUF-28



CUF-48

Centaur model _____ Exterior finish: to be stainless steel front, sides & top, rear back aluminum. Interior finish: White Aluminum back and top, ABS Plastic Sides – ABS Plastic Door Liner. Controller to be Dixell solid state with digital display, self diagnostic, easily programmable. Refrigeration is top mount condensing unit with capillary tube system, temperature range freezers 0-4F. Refrigerant to be environmentally friendly with R404. Coils to be coated aluminum/copper. Condensate heater to have an integral hot gas refrigerant line built into condensate pan. All doors stand open pass 90 degrees, shelf closing less than 90 degrees. Shelves to be heavy duty wire with stand-off to provide excellent air flow, PVC coated. Casters to be factory mounted. Unibody construction with foamed sides from top to bottom, CFC free polyurethane insulation. NSF-7 listed, UL-471

FEATURES LIST

Solid state thermostat with digital display

Stainless steel front & sides

Self closing doors remain open past 90°

Environmentally friendly R404A

EZ slide out condenser

Whisper quiet

Solid construction

Black inset handle

One piece stainless tabletop

Casters with two front brakes

Cool air intake

Zero clearance back and sides


** WARRANTY: 2 Years Parts and Labor and
Additional 3 Years on Compressor.*

Specifications subject to change without notice

Approvals: _____



PLAN VIEW

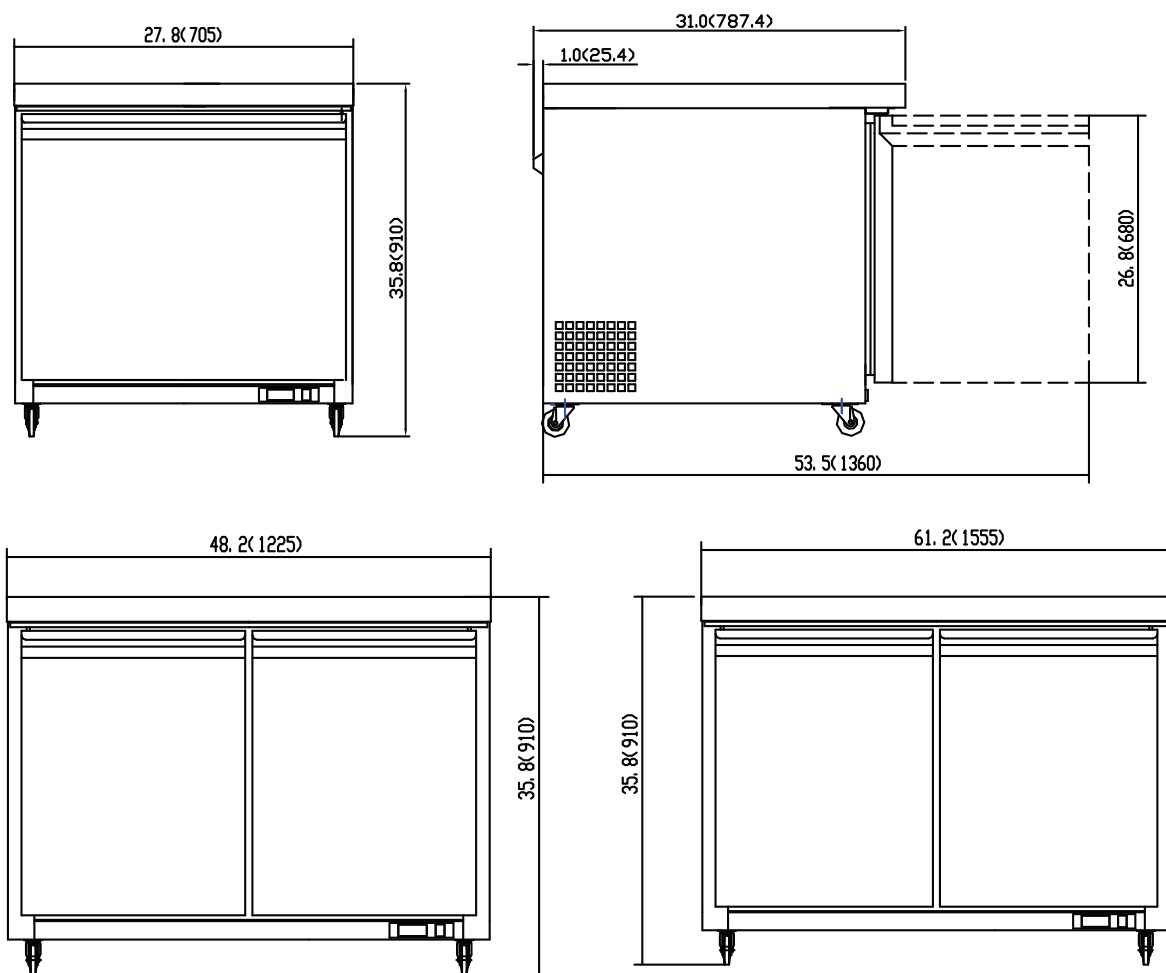

DIMENSIONAL DATA

| CUF-28 | CUF-48 | CUF-60 |
|--|--|---|
| Capacity: 1 door and 1 shelf, 6.5 cu.ft. | Capacity: 2 doors and 2 shelves, 12 cu.ft. | Capacity: 2 doors and 2 shelves, 15.5 cu.ft. |
| Dimensions: Overall Length = 27.8" Overall Depth = 31.0" Overall Height = 35.8" | Dimensions: Overall Length = 48.2" Overall Depth = 31.0" Overall Height = 35.8" | Dimensions: Overall Length = 61.2" Overall Depth = 31.0" Overall Height = 35.8" |
| HP: 1/2 Voltage: 115/60/1 Amps: 7 NEMA Plug: 5-15P Cord Length: 10 | HP: 5/8 Voltage: 115/60/1 Amps: 9 NEMA Plug: 5-15P Cord Length: 10 | HP: 5/8 Voltage: 115/60/1 Amps: 10 NEMA Plug: 5-15P Cord Length: 10 |
| Shipping Information: Crated Weight: 195 lbs. | Shipping Information: Crated Weight: 285 lbs. | Shipping Information: Crated Weight: 335 lbs. |