

Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Three-Compartment Utility Sinks. model _. Constructed of type 304 or 430 stainless steel with square corners, Euro-Style edging on front, and 8" backsplash. All partitions have %" rolled top edge. Faucet holes punched on 8" centers. All outside corners to be bullnosed for clean, safe edges. 1%" O.D. galvanized tubular legs with adjustable bullet feet.



three-compartment utility sink

■ Lever waste with overflow

■ Stainless steel legs

Options / Accessories

Ш	Faucets	
	Detachable drainboard	*

- Lever waste
- ☐ Stainless steel feet

Design and Construction Features:

- · For numerous applications when NSF approval is not required (For NSF-approved utility sinks, add prefix "N-" to model number. Example: **N-**2460-3-16/3)
- Entire assembly is fuse welded and planished, providing a one-piece seamless sink unit.
- 34½" to 35½" (876 to 902mm) working height.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • Fax: 302-653-2065 www.eaglegrp.com

Foodservice Division: Phone 800-441-8440 MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our SpecFAB® Division. Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: guotes@eaglegrp.com

Three-Compartment Utility Sinks with Square Corner Construction

MODELS:

□ 1836-3-16/4	□ 2136-3-16/3	2448-3-16/4	□ 2136-3-18-16/3
□ 1836-3-16/3	2148-3-16/4	2448-3-16/3	2148-3-18-16/
□ 1848-3-16/4	2148-3-16/3	2460-3-16/4	2148-3-18-16/3
□ 1848-3-16/3	2154-3-16/4	2460-3-16/3	2154-3-18-16/
□ 1854-3-16/4	2154-3-16/3	2472-3-16/4	2154-3-18-16/3
□ 1854-3-16/3	2160-3-16/4	2472-3-16/3	2472-3-24-16/
1 2136-3-16//	1 2160-2-16/2	1 2136-3-18-16/4	1 2/172-3-2/-16/

Top:

- All partitions have euro-style front edge.
- Available with detachable* or welded drainboards.
- 8" (203mm) splash features 2" (51mm) return to wall on 45° angle, with 1" (25mm) upturn.
- 1½" (29mm) faucet holes punched on 8" (203mm) centers.

Legs:

- 1%" (41mm)-diameter heavy-gauge galvanized tubing.
- High-impact corrosion-resistant 1" (25mm) adjustable bullet feet.
- Leg locations fall directly under sink bowls, providing increased stability and maximum weight support.

Sink Bowls:

- 16 gauge type 304 or 430 stainless steel.
- 13%" (340mm)-deep compartments.
- 12-gauge leg gussets welded to a die-cut heavy-gauge reinforcing plate underneath sink bowls.
- Drain hole is 3½" (89mm)-diameter recessed and complete with 1½" (38mm) IPS basket-type waste drain, which is shipped loose.

AUTOQUOTES




EG20.13C Rev. 06/14


^{*} See Spec Sheet #EG20.13E for optional detachable drainboards.



Item No.: .	
Project No.: .	
S.I.S. No.: .	

Three-Compartment Utility Sinks with Square Corner Construction

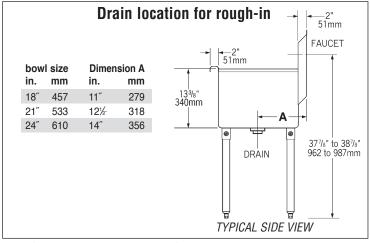




Sinks with No Drainboards

16 gauge type 430 16 gauge type 304 BOWL DIMENSION stainless steel stainless steel width length				DRAIN			RALL I						
stainless steel model #	stainless steel model #	in.	ntn mm	leng in.	gtn mm	quantity	length in. mm	in.	mm	in.	gth mm	lbs.	ight kg
1836-3-16/4	1836-3-16/3	18″	457	12″	305	0	n/a	22"	559	37%"	949	79	35.8
1848-3-16/4	1848-3-16/3	18″	457	16″	406	0	n/a	22″	559	49%"	1254	90	40.8
1854-3-16/4	1854-3-16/3	18″	457	18″	457	0	n/a	22"	559	55%"	1406	97	44.0
2136-3-16/4	2136-3-16/3	21"	533	12″	305	0	n/a	25"	635	37%"	949	85	38.6
2148-3-16/4	2148-3-16/3	21″	533	16″	406	0	n/a	25"	635	49%"	1254	87	39.5
2154-3-16/4	2154-3-16/3	21″	533	18″	457	0	n/a	25"	635	55%"	1406	100	45.4
2160-3-16/4*	2160-3-16/3*	21″	533	20″	508	0	n/a	25″	635	61%"	1559	110	49.9
2448-3-16/4	2448-3-16/3	24"	610	16″	406	0	n/a	28″	711	49%"	1254	92	41.7
2460-3-16/4*	2460-3-16/3*	24"	610	20"	508	0	n/a	28″	711	61%"	1559	115	52.2
2472-3-16/4*	2472-3-16/3*	24"	610	24"	610	0	n/a	28″	711	73%"	1864	125	56.7

Includes two sets of faucet holes.



Sinks with Double Drainboards

16 gauge type 430 stainless steel	16 gauge type 304 stainless steel	BOWL DIMENSIONS width length			DRAINBOARD length			OVERALL DIME			SIONS gth	weight		
model #	model #	in.	mm	in.	mm	quantity	in.	mm	in.	mm	in.	mm	lbs.	kg
2136-3-18-16/4	2136-3-18-16/3	21″	533	12"	305	2	18″	457	25″	635	721/4"	1835	125	56.7
2148-3-18-16/4	2148-3-18-16/3	21″	533	16″	406	2	18″	457	25″	635	841/4"	2140	127	57.6
2154-3-18-16/4	2154-3-18-16/3	21″	533	18″	457	2	18″	457	25″	635	90¼"	2292	140	63.5
2472-3-24-16/4*	2472-3-24-16/3*	24"	610	24"	610	2	24"	610	28″	711	1201/4"	3054	175	79.4

^{*} Includes two sets of faucet holes.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440

MHC/Retail Display Divisions: Phone 800-637-5100

Printed in U.S.A. ©2014 by Eagle Group

Rev. 06/14