

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Wall-Mount Refrigerator

WMR24S-L, WMR24S-R, WMR24X-L, WMR24X-R



WMR24S-R



**Intertek**

EP 5016978  
Energy Performance  
Verified / Rendement  
Énergétique Vérifié



**Intertek**

4004503  
Conforms to NSF/ANSI STD 7  
and UL STD 471  
Certified to CSA STD C22.2 No. 120  
Meets NSF 7 requirements for open food  
as a storage refrigerator



**Intertek**

### Standard Features

- Self-contained forced air refrigeration system for uniform cooling of product
- Automatic condensate evaporator
- Digital thermostat control with automatic defrost
- All stainless steel interior construction
- Stainless steel exterior construction with galvanized steel back and bottom
- Eco friendly foamed-in-place insulation has zero impact on global warming or ozone depletion
- Removable condenser air inlet filter for easy cleaning
- Nine-foot grounded cord and plug provided
- Available with stainless steel door or glass door with stainless steel frame
- LED interior lights with on/off switch
- Specify Left or Right hinge when ordering
- Includes brackets for wall mounting
- 4" adjustable legs available for countertop installation

### Specifications

#### Electrical

- 120V, 1 phase, 60 Hz, 2.5 full load amps
- Separate 15 amp circuit is required
- Includes a 9-foot NEMA 5-15P grounded cord

#### Refrigeration

- 1/8 HP, R290 refrigerant, 4.25 oz
- 850 BTUH refrigeration capacity (0.07 tons)
- 1,023 BTU/hr heat rejection

#### Plumbing

- Automatic condensate evaporator. No drain connection required.

#### Capacity

- Interior Dimensions: 21"W x 23"H x 14"D
- 3.9 cubic feet of storage space

#### Operating Range

- 34°F (1°C) to 40°F (4°C)

#### Shelving

- Two adjustable coated shelves included

#### Legs (Optional)

- 4" adjustable legs

#### Materials

- Stainless steel parts include: interior, door, and exterior front, sides and top
- Galvanized steel parts include: back, condensing unit floor and exterior bottom



5-15P


Cleaning & care instructions: <https://www.glastender.com/support/documents/manuals/general-cleaning-and-care-instructions-for-stainless-steel>

<p><b>Glastender, Inc.</b> • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 <a href="http://www.glastender.com">www.glastender.com</a></p>	Approval/Notes:
--	-----------------

Specifications subject to change without notice. For current specifications please visit our website.


# Wall-Mount Refrigerator

## Dimensional Information

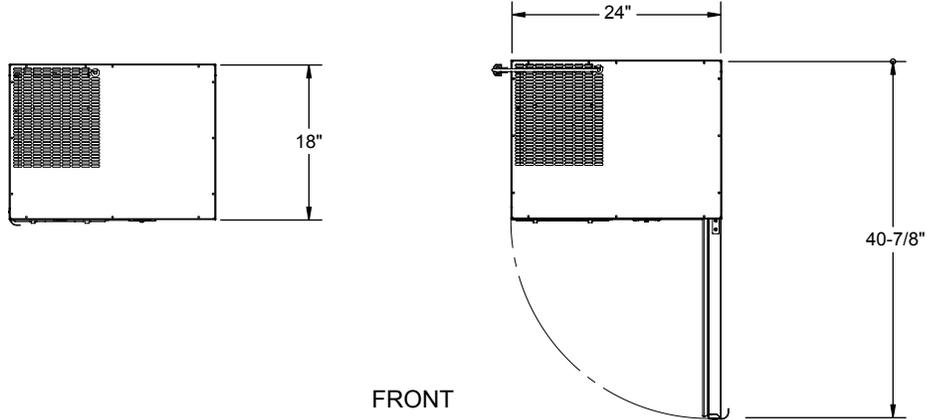

FRONT

## PLAN VIEWS

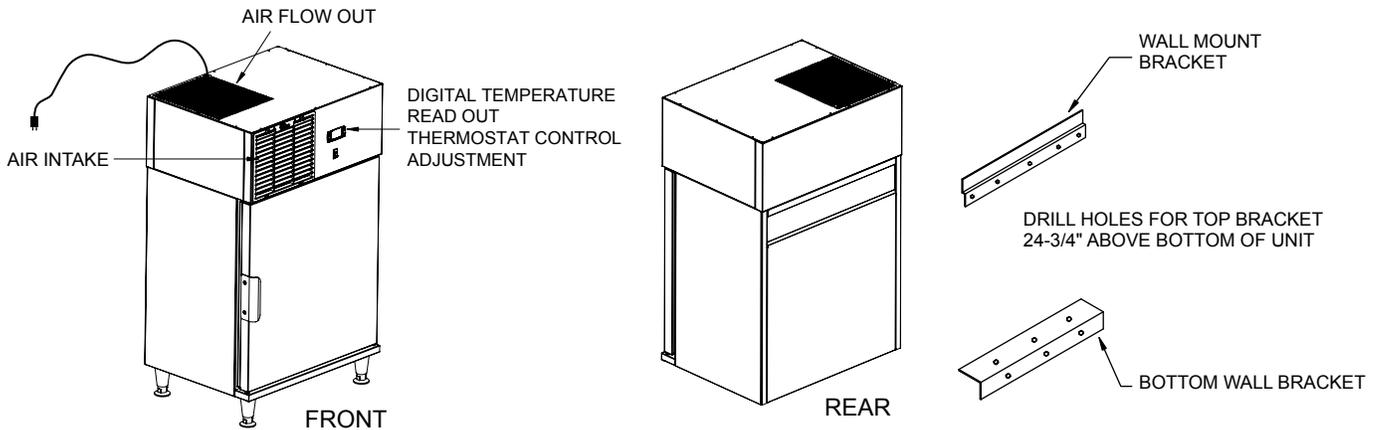


FRONT

REAR

8" OF AIR SPACE IS REQUIRED ABOVE UNIT TO ALLOW FOR AIR FLOW OUT  
 WARNING: COMPRESSOR FAILURE DUE TO RESTRICTION OR BLOCKAGE OF AIR FLOW WILL VOID WARRANTY.

## ISOMETRIC VIEWS

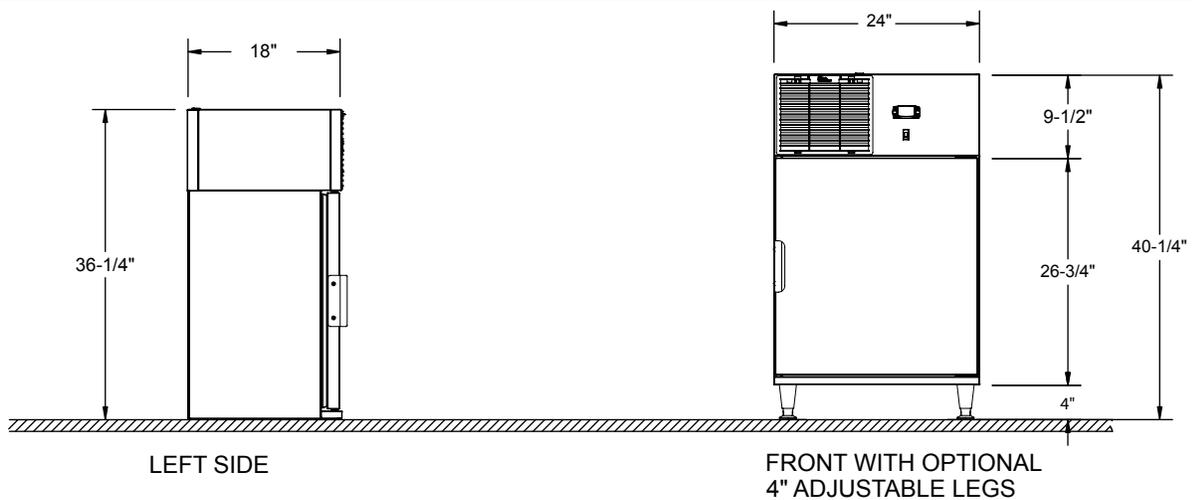

LEFT SIDE

FRONT WITH OPTIONAL  
4" ADJUSTABLE LEGS

## ELEVATION VIEWS



5400 N Michigan Rd • Saginaw, MI • 48604-9780  
 989.752.4275 • 800.748.0423 • Fax 989.752.4444  
 www.glastender.com

Printed in USA