	BEVERAGE-AIR
--	--------------

Project:	 AIA
Item:	
Location:	 SIS
Approved:	

FOOD PREPARATION TABLES

DP67HC Deli/Pizza Two Door Prep Table Hydrocarbon Series



7 Year Parts/Labor Warranty 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, top, doors, and grille (galvanized back &
- Interior liner is made of corrosion resistant aluminum
- Aluminum top interior liner prevents spill from falling into cabinet
- Stainless steel top
- · Removable hoods and insulated lid assemblies are made of matching stainless steel
- Self-closing doors with 120° stay-open feature on cam-lift hinges
- Plug-in door gaskets
- Easy lift-off door removal for service and cleaning
- Field reversible doors
- 3" Casters, 2 with brakes standard
- 19" Wide reversible cutting board constructed of white polyethylene
- · Cutting board removable for cleaning
- Four (4) epoxy-coated steel wire shelves
- Units will accept pans up to 6" deep (pans are not included)
- · Compressor available on left or right, specify at time of unit order

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Clear lid
- Combination door/drawer models
- Overshelf kits
- Additional shelves
- Shelf clips
- Pan support
- Door locks
- · Composite cutting board
- Thermometer
- Night cover
- Bun tray rack
- 6" Casters
- 6" Legs black or seismic/flanged
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Adaptive defrost
- · Epoxy coated evaporator coil
- Enhanced airflow maintains temperatures between 36° 38°F









MODEL	DP67HC		
EXTERNAL DIMENSIONAL DATA			
Width Overall	67"		
Depth Overall with Cutting Board	38 1⁄8"		
Height Overall with Casters & Lid Open	54 ¾"		
No. of Doors	2		
Depth with Door Open 90°	57 1⁄8"		
Door Openings	21 %" x 23 %"		
Depth, Cutting Board	19"		
INTERNAL DIMENSIONAL DATA			
NET Capacity (cubic ft.)	20.68		
Internal Width Overall (in)	63"		
Internal Width Usable (in)	48"		
Internal Depth Overall (in)	26"		
Internal Height Overall (in)	23 ¾"		
No. of Shelves	4		
ELECTRICAL DATA			
Full Load Amperes	4.5		
Voltage	115/60/1		
Nema Plug (8' cord)	5-15P		
REFRIGERATION DATA			
Horsepower	1/2		
Capacity (BTU/Hr)	2940		
Heat Rejection (BTU/Hr)	4410		
Charge (lbs/grams/ounces)	0.231 / 105 / 3.7		
SHIPPING DATA			
Gross Weight - Crated	438 lbs		
Height - Crated	49"		
Width - Crated	70"		
Depth - Crated	37"		

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- $1/4^{\rm o}$. Metric dimensions (MM).



Deli/Pizza Preparation Table

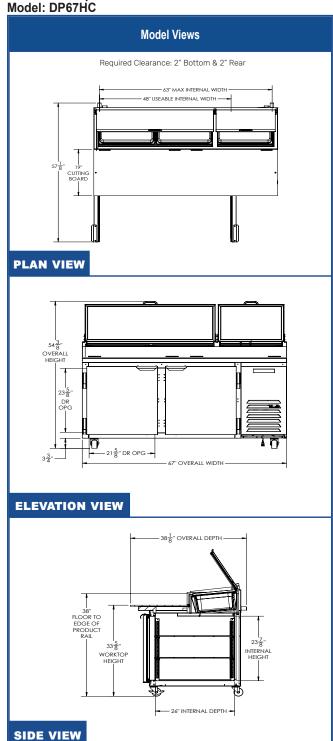



ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.



