



STAINLESS STEEL

MULTI-STATION WALL MOUNTED SQUARE CORNER SINKS WITH TUBULAR SUPPORTS WITH/WITHOUT MANUAL FAUCETS



19-18-23 Shown



19-18-60-F Shown



19-18-80-F Shown



19-18-120 Shown

Item #: _____ Qty #: _____
Model #: _____
Project #: _____



Standard “-F” Models Include
K-159 Gooseneck Faucets



-ADA-F Models Include
K-161-LU Gooseneck Faucets

FEATURES:

8 1/2" high backsplash.

Standard Series: 8" sink bowl depth.

A.D.A. Series: 5" sink bowl depth.

One stainless steel “Z” bracket supplied each unit.

One **K-6** 3 1/2" rear basket drain(s).

Tubular stainless steel legs with flanged feet.

Side & rear adjustable cross-bracing with leg clamps

Manual Operated: Faucets sold separately

“-F” Series includes **K-159** 8 1/2" gooseneck faucet(s).

“-ADA-F” Series includes **K-161-LU** 8 1/2" gooseneck faucet(s) with wrist handles.

CONSTRUCTION:

All TIG welded.

Welded areas blended to match adjacent surfaces and to a satin finish.

MATERIAL:

16 gauge type “304” stainless steel.

1 5/8" tubular “304” stainless steel supports.

MECHANICAL:

8" O.C. faucet holes punched in splash at each station.

# Of Stations	16 Gauge Sinks Without Faucets	16 Gauge Sinks With Faucets	# Of Faucets
1	19-18-23	19-18-23-F	1 Faucet
2	19-18-40	19-18-40-F	2 Faucets
2	19-18-48	19-18-48-F	2 Faucets
3	19-18-60	19-18-60-F	3 Faucets
3	19-18-72	19-18-72-F	3 Faucets
4	19-18-80	19-18-80-F	4 Faucets
4	19-18-96	19-18-96-F	4 Faucets
5	19-18-100	19-18-100-F	5 Faucets
6	19-18-120	19-18-120-F	6 Faucets

A.D.A. COMPLIANT - 5" BOWL DEPTH

# Of Stations	16 Gauge Sinks Without Faucets	16 Gauge Sinks With Faucets	# Of Faucets
2	19-18-40-ADA	19-18-40-ADA-F	2 Faucets
2	19-18-48-ADA	19-18-48-ADA-F	2 Faucets
3	19-18-60-ADA	19-18-60-ADA-F	3 Faucets
3	19-18-72-ADA	19-18-72-ADA-F	3 Faucets
4	19-18-80-ADA	19-18-80-ADA-F	4 Faucets
4	19-18-96-ADA	19-18-96-ADA-F	4 Faucets
5	19-18-100-ADA	19-18-100ADA-F	5 Faucets
6	19-18-120-ADA	19-18-120ADA-F	6 Faucets

WARNING: Equipment that include faucets on this page may contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:

Email: smartfab@advancetabco.com or Fax: 631-586-2933


DETAILS and SPECIFICATIONS

TOL ± .500"


FITTINGS SUPPLIED AS SHOWN

ALL DIMENSIONS ARE TYPICAL

MULTI-STATION WALL MOUNTED SQUARE CORNER SINKS WITH TUBULAR SUPPORTS WITH/WITHOUT MANUAL FAUCETS

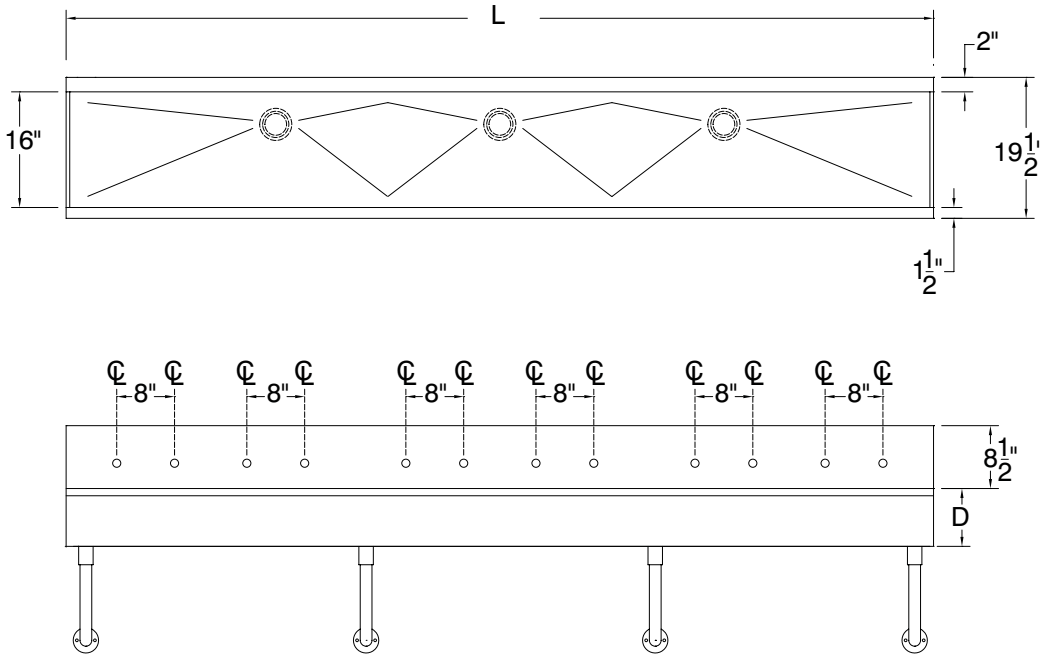

SEE PAGE 3
FOR
PLUMBING
ROUGH-INS



# Of Stations	L	16 Gauge Sinks Without Faucets	Wt.	16 Gauge Sinks With Faucets	Wt.	# Of Drains	# Of Faucets	Cu.
STANDARD - 8" DEPTH								
1	23"	19-18-23	45	19-18-23-F	47	1	1	11
2	40"	19-18-40	65	19-18-40-F	69	1	2	15
2	48"	19-18-48	75	19-18-48-F	79	1	2	16
3	60"	19-18-60	84	19-18-60-F	90	1	3	22
3	72"	19-18-72	95	19-18-72-F	100	1	3	23
4	80"	19-18-80	98	19-18-80-F	106	1	4	28
4	96"	19-18-96	110	19-18-96-F	116	1	4	30
5	100"	19-18-100	125	19-18-100-F	135	2	5	35
6	120"	19-18-120	150	19-18-120-F	160	3	6	42
A.D.A. COMPLIANT- 5" DEPTH								
2	40"	19-18-40-ADA	62	19-18-40-ADA-F	66	1	2	15
2	48"	19-18-48-ADA	72	19-18-48-ADA-F	76	1	2	16
3	60"	19-18-60-ADA	80	19-18-60-ADA-F	90	1	3	22
3	72"	19-18-72-ADA	85	19-18-72-ADA-F	97	1	3	23
4	80"	19-18-80-ADA	92	19-18-80-ADA-F	106	1	4	28
4	96"	19-18-96-ADA	107	19-18-96-ADA-F	113	1	4	30
5	100"	19-18-100-ADA	118	19-18-100ADA-F	129	2	5	35
6	120"	19-18-120-ADA	142	19-18-120ADA-F	155	3	6	42




PLUMBING ROUGH-INS

TOL ± .500"

FITTINGS SUPPLIED AS SHOWN


ALL DIMENSIONS ARE TYPICAL

MULTI-STATION WALL MOUNTED SQUARE CORNER SINKS WITH TUBULAR SUPPORTS WITH/WITHOUT MANUAL FAUCETS

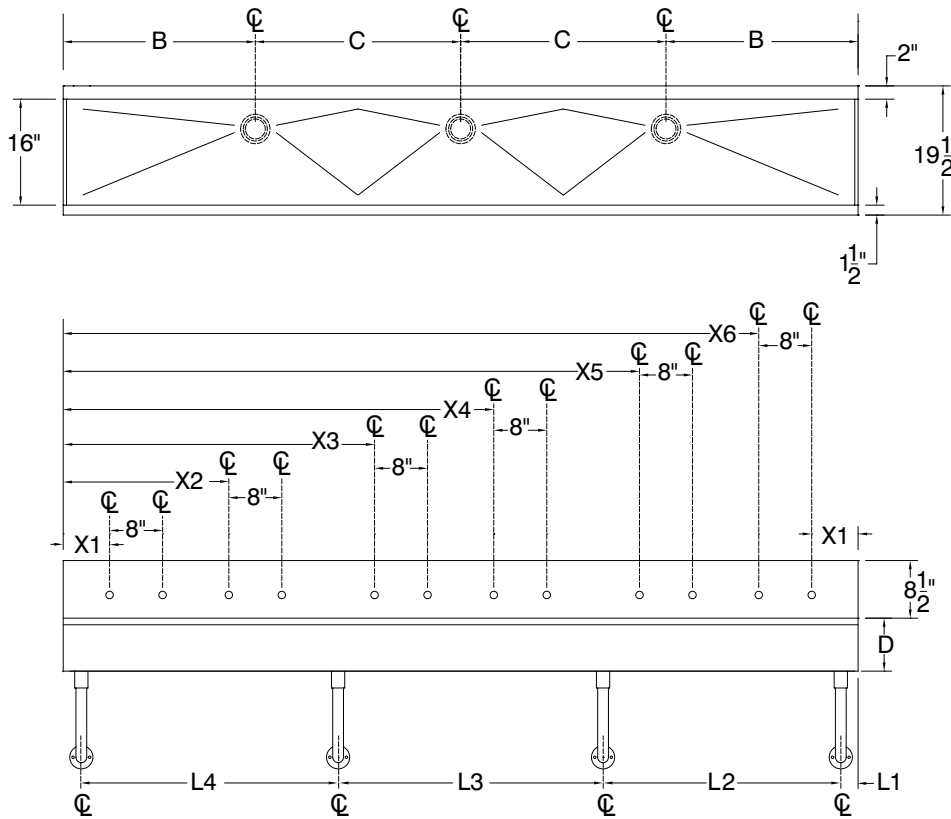

Tubular Support Locations

Model #	L1	L2	L3	L4
19-18-23	2.625"	16.375"	N/A	N/A
19-18-40	2 5/8"	37 3/8"	N/A	N/A
19-18-48	2 5/8"	45 3/8"	N/A	N/A
19-18-60	2 5/8"	57 3/8"	N/A	N/A
19-18-72	2 5/8"	69 3/8"	N/A	N/A
19-18-80	2 5/8"	77 3/8"	N/A	N/A
19-18-96	2 5/8"	93 3/8"	N/A	N/A
19-18-100	2 5/8"	40 1/4"	59 3/4"	97 3/8"
19-18-120	2 5/8"	40"	80"	117 3/8"



# Of Stations	L	16 Ga. Without Faucets	16 Ga. With Faucets	B	C	D	X1	X2	X3	X4	X5	X6
STANDARD - 8" DEPTH												
1	23"	19-18-23	19-18-23-F	11 1/2"	N/A	8"	7 1/2"	N/A	N/A	N/A	N/A	N/A
2	40"	19-18-40	19-18-40-F	20	N/A	8"	7"	25"	N/A	N/A	N/A	N/A
2	48"	19-18-48	19-18-48-F	24	N/A	8"	7"	33"	N/A	N/A	N/A	N/A
3	60"	19-18-60	19-18-60-F	30	N/A	8"	7"	26"	45"	N/A	N/A	N/A
3	72"	19-18-72	19-18-72-F	36"	N/A	8"	7"	32"	57"	N/A	N/A	N/A
4	80"	19-18-80	19-18-80-F	25"	30"	8"	7"	25"	47"	65"	N/A	N/A
4	96"	19-18-96	19-18-96-F	32"	32"	8"	7"	32"	56"	81"	N/A	N/A
5	100"	19-18-100	19-18-100-F	29	42	8"	7"	26 1/2"	46"	65 1/2"	85"	N/A
6	120"	19-18-120	19-18-120-F	29"	31"	8"	7"	25"	47"	65"	87"	105"
A.D.A. COMPLIANT- 5" DEPTH												
2	40"	19-18-40-ADA	19-18-40-ADA-F	20	N/A	5"	7"	25"	N/A	N/A	N/A	N/A
2	48"	19-18-48-ADA	19-18-48-ADA-F	24	N/A	5"	7"	33"	N/A	N/A	N/A	N/A
3	60"	19-18-60-ADA	19-18-72-ADA-F	30	N/A	5"	7"	26"	45"	N/A	N/A	N/A
3	72"	19-18-72-ADA	19-18-60-ADA-F	36"	N/A	5"	7"	32"	57"	N/A	N/A	N/A
4	80"	19-18-80-ADA	19-18-80-ADA-F	25"	30"	5"	7"	25"	47"	65"	N/A	N/A
4	80"	19-18-96-ADA	19-18-96-ADA-F	32"	32"	5"	7"	32"	56"	81"	N/A	N/A
5	100"	19-18-100-ADA	19-18-100ADA-F	29	42	5"	7"	26 1/2"	46"	65 1/2"	85"	N/A
6	120"	19-18-120-ADA	19-18-120ADA-F	29"	31"	5"	7"	25"	47"	65"	87"	105"

