

| PROJECT: | | |
|-----------|-------|------|
| ITEM# | | QTY: |
| MODEL# _ | | |
| AIA# | SIS # | |
| APPROVED: | | |

NOVELTY CASE

Model: NC51HC-1-W



3 Year Parts/Labor Warranty **5 Year Compressor Warranty**

CABINET CONSTRUCTION

- Exterior is white coated steel
- Interior is white powder coated surface
- Low energy consumption
- **LED** lighting
- Adjustable thermostat
- Operating temperature of 0°F to -10°F
- Angle top design with LowE tempered glass lids
- Lids are easily removable with lid locks & keys standard
- Round exterior edges
- Integrated tag molding
- 2" Heavy duty casters
- Drain plug for easy cleaning
- Five (5) removable baskets











OPTIONS & ACCESSORIES


- 2 Ring tub holder
- **Custom graphics**
- Dip well

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- The unit is best suited for an environment where temperatures remain below 75°F and humidity does not exceed 55%
- Areas with direct sunlight should also be avoided
- Maintenance free condenser

BEVERAGE-AIR

Novelty Case Model: NC51HC-1-W

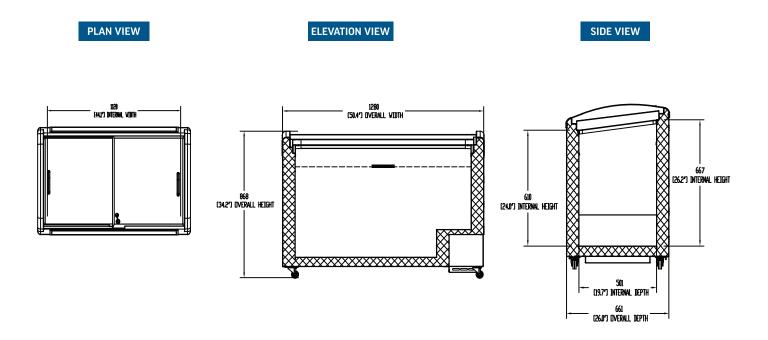

| EXTERNAL DIMENSIONAL DATA | | | |
|------------------------------------|----------|--|--|
| Width Overall (in) | 50 2/5" | | |
| Depth Overall (in) | 26" | | |
| Height Overall (in) | 34 1/5" | | |
| Number of Lids | 2 | | |
| Number of Baskets | 5 | | |
| INTERNAL DIMENSIONAL DATA | | | |
| NET Capacity (cubic ft). | 9.43 | | |
| Internal Width Overall (in) | 44 1/10" | | |
| Internal Depth Overall (in) | 19 7/10" | | |
| Internal Front Height Overall (in) | 24" | | |
| Internal Rear Height Overall (in) | 26 1/5" | | |

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

| ELECTRICAL DATA | | | |
|---------------------------|--------------|--|--|
| Full Load Amps | 3.5 | | |
| Voltage | 115/60/1 | | |
| Nema Plug (8' cord) | 5-15P | | |
| REFRIGERATION DATA | | | |
| Horsepower | 1/4 | | |
| Capacity (BTU/Hr) | 1130 | | |
| Heat Rejection (BTU/Hr) | 1695 | | |
| Charge (lbs/grams/ounces) | 0.198/90/3.2 | | |
| SHIPPING DATA | | | |
| Gross Weight - Crated | 200 lbs. | | |
| Height - Crated (in) | 40" | | |
| Width - Crated (in) | 53" | | |
| Depth - Crated (in) | 28" | | |

ELECTRICAL CONNECTION



Unit pre-wired at factory NEMA 5-15P and include 8' long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 9/25 | Printed in U.S.A.

