

# MARKETMAX DUAL-TEMP REFRIGERATOR/FREEZER

MMRF72HC Black Hinged Triple Glass Door Hydrocarbon Series



5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Exterior features durable black painted steel
- Heavy duty interior construction includes white coated steel walls
- Brightly lit sign panel
- LED lighting
- Modern one-piece grille
- Full electronic control with digital display
- Dual-temp refrigerator/freezer units provide two different operating temperature zones for different types of products
- Left: refrigerator double section has double pane lowE glass doors
- Right: freezer single section has triple pane lowE glass door
- Self-closing doors with 120° stay-open feature
- Snap-in gaskets, easy to remove for cleaning or replacement
- · Self-contained bottom mount refrigeration system
- Fifteen (15) heavy-duty epoxy coated wire shelves
- Four (4) shelf clips included per shelf
- · Leveling feet standard

#### **OPTIONS & ACCESSORIES**

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel or white exterior option
- Stainless steel or black interior option
- · Shelves black or white
- Stainless steel clips
- Flow track
- Gravity-Flo track
- Price tag molding
- 3" or 6" Casters
- 6" Legs or seismic/flanged legs
- Door locks (swing doors only)
- Custom signage & decals
- Remote option\* (see note on back page)

#### **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Refrigerator has non-electric defrost with hot gas condensate evaporation
- Freezer has electric defrost with hot gas condensate evaporation
- Epoxy coated evaporator coil
- Freezer maintains product temperature to -10°F
- Refrigerator maintains product temperatures between 36°F to










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	MMRF72HC-1-C-BW
EXTERNAL DIMENSIONAL DATA	
Width Overall	75"
Depth Overall (with handle)	33 ½"
Height Overall	78 <sup>1</sup> ⁄8"
Number of Doors	3
Depth with Door Open 90 <sup>0</sup>	55 ½"
Door Openings (in)	21 <sup>7</sup> / <sub>8</sub> " x 52 <sup>3</sup> / <sub>4</sub> "
INTERNAL DIMENSIONAL DATA	
NET Capacity Refrigerator (cubic ft.)	(F) 44.85 (R) 19.62
Internal Width Overall (in)	(R) 47" (F) 22"
Internal Depth Overall (in)	28 ½"
Internal Height Top Usable (in)	55"
Number of Shelves	15
ELECTRICAL DATA	
Full Load Amperes Refrigerator	(R) 3.9 (F) 6.34
REFRIGERATION DATA	
Horsepower	(R) 1/3 (F) 3/4
Capacity (BTU/Hr)	(R) 2291 (F) 2097
Heat Rejection (BTU/Hr)	6582
Charge (lbs/grams/ounces)	(R) .2425 / 110 / 3.88 (F) .2094 / 95 / 3.35
SHIPPING DATA	
Gross Weight - Crated	842 lbs
Height - Crated	85"
Width - Crated	77"
Depth - Crated	36"

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

## Dual-Temp Glass Door Merchandisers

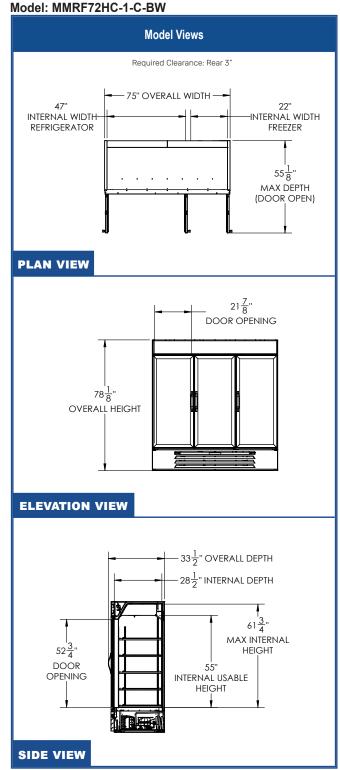

### **ELECTRICAL CONNECTION**



115/60/1 (2) NEMA 5-15P

Unit pre-wired at factory and include 8' long cord and plug set.

