


EQUIPMENT STANDS

w/ Optional Cutting Boards

Stainless Steel Bases

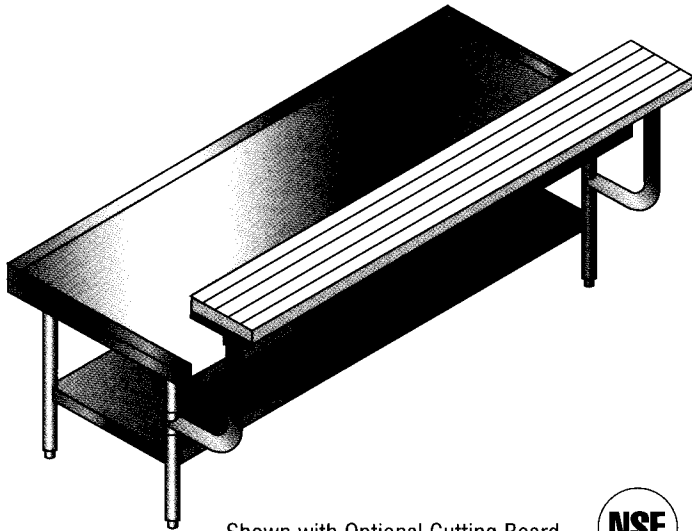

Shown with Optional Cutting Board



FEATURES

Welded set up design creates a solid sturdy unit with **no assembly required.**

Square edge design for clean abutment to other equipment.

Tops are sound deadened.

Under bracing locations provide solid top and minimal deflection.

Rear and ends are turned up 2" to contain equipment.

Ends are hemmed, capped, and finished to conceal bracing.

CONSTRUCTION

Top: All edges shall be die formed with corners welded to form one-piece sanitary unit.

Bracing: Two full length hat channels for rigidity.

Legs: 1⁵/₈" O.D. 16 Gauge tubing with adjustable bullet feet and stainless steel gussets.

Undershelf: 18 Gauge Type 304 stainless steel, notched to fit legs and fully welded.

Custom Sizes Available.
Call Factory For Details.

STANDARD SERIES 16 GAUGE TYPE 304 S/S STAINLESS STEEL BASES

OA Length	Model No.	Approx. Wt.		Cube
		(lbs.)	(kg)	
24" WIDE TABLES				
24"	ES-24-S	60	27	11
36"	ES-2436-S	70	32	16
48"	ES-2448-S	80	36	22
60"	ES-2460-S	95	43	27
72"	ES-2472-S	110	50	32
96"	ES-2496-S	140	64	43

30" WIDE TABLES				
24"	ES-3024-S	70	32	12
36"	ES-3036-S	80	36	18
48"	ES-3048-S	95	43	25
60"	ES-3060-S	100	45	31
72"	ES-3072-S	120	55	37
96"	ES-3096-S	150	68	49

OPTIONAL CUTTING BOARD STAINLESS TOP				
24"	ES-CBS-24	15	7	N/A
36"	ES-CBS-36	20	9	N/A
48"	ES-CBS-48	25	11	N/A
60"	ES-CBS-60	30	14	N/A
72"	ES-CBS-72	35	16	N/A
96"	ES-CBS-96	40	18	N/A

SPEC LINE 14 GAUGE TYPE 304 S/S STAINLESS STEEL BASES

OA Length	Model No.	Approx. Wt.		Cube
		(lbs.)	(kg)	
24" WIDE TABLES				
24"	ES-SL-24-S	60	27	11
36"	ES-SL-2436-S	70	32	16
48"	ES-SL-2448-S	80	36	22
60"	ES-SL-2460-S	95	43	27
72"	ES-SL-2472-S	110	50	32
96"	ES-SL-2496-S	140	64	43

30" WIDE TABLES				
24"	ES-SL-3024-S	70	32	12
36"	ES-SL-3036-S	80	36	18
48"	ES-SL-3048-S	95	43	25
60"	ES-SL-3060-S	100	45	31
72"	ES-SL-3072-S	120	55	37
96"	ES-SL-3096-S	150	68	49

OPTIONAL CUTTING BOARD MAPLE TOP				
24"	ES-CBM-24	20	9	N/A
36"	ES-CBM-36	25	11	N/A
48"	ES-CBM-48	30	14	N/A
60"	ES-CBM-60	35	16	N/A
72"	ES-CBM-72	40	18	N/A
96"	ES-CBM-96	45	20	N/A

DETAILED SPECIFICATIONS

Equipment Stands

STANDARD SERIES

16 GA. 304 STAINLESS STEEL TOPS

S/S Bases

24" WIDE

A LENGTH	MODEL NO.	B	C	D
24"	ES-24-S	18 $\frac{1}{4}$ "	N/A	17"
36"	ES-2436-S	30 $\frac{1}{4}$ "	N/A	17"
48"	ES-2448-S	42 $\frac{1}{4}$ "	N/A	17"
60"	ES-2460-S	54 $\frac{1}{4}$ "	N/A	17"
72"	ES-2472-S	66 $\frac{1}{4}$ "	N/A	17"
96"	ES-2496-S	44 $\frac{1}{4}$ "	44 $\frac{1}{4}$ "	17"

30" WIDE

A LENGTH	MODEL NO.	B	C	D
24"	ES-3024-S	18 $\frac{1}{4}$ "	N/A	24"
36"	ES-3036-S	30 $\frac{1}{4}$ "	N/A	24"
48"	ES-3048-S	42 $\frac{1}{4}$ "	N/A	24"
60"	ES-3060-S	54 $\frac{1}{4}$ "	N/A	24"
72"	ES-3072-S	66 $\frac{1}{4}$ "	N/A	24"
96"	ES-3096-S	44 $\frac{1}{4}$ "	44 $\frac{1}{4}$ "	24"

SPEC LINE

14 GA. 304 STAINLESS STEEL TOPS



S/S Bases

24" WIDE

A LENGTH	MODEL NO.	B	C	D
24"	ES-SL-24-S	18 $\frac{1}{4}$ "	N/A	17"
36"	ES-SL-2436-S	30 $\frac{1}{4}$ "	N/A	17"
48"	ES-SL-2448-S	42 $\frac{1}{4}$ "	N/A	17"
60"	ES-SL-2460-S	54 $\frac{1}{4}$ "	N/A	17"
72"	ES-SL-2472-S	66 $\frac{1}{4}$ "	N/A	17"
96"	ES-SL-2496-S	44 $\frac{1}{4}$ "	44 $\frac{1}{4}$ "	17"

30" WIDE

A LENGTH	MODEL NO.	B	C	D
24"	ES-SL-3024-S	18 $\frac{1}{4}$ "	N/A	24"
36"	ES-SL-3036-S	30 $\frac{1}{4}$ "	N/A	24"
48"	ES-SL-3048-S	42 $\frac{1}{4}$ "	N/A	24"
60"	ES-SL-3060-S	54 $\frac{1}{4}$ "	N/A	24"
72"	ES-SL-3072-S	66 $\frac{1}{4}$ "	N/A	24"
96"	ES-SL-3096-S	44 $\frac{1}{4}$ "	44 $\frac{1}{4}$ "	24"

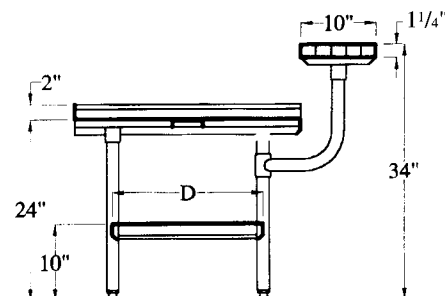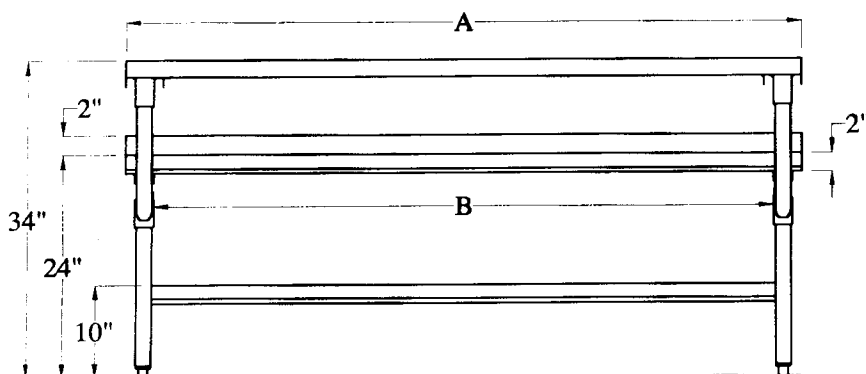

MATERIALS

Standard Series

Top: 16 Gauge Type
304 S/S

Legs: 1 $\frac{5}{8}$ " Diameter
S/S or Galvanized
Tubing

Under- 18 Gauge S/S
shelf:

Spec Line

Top: 14 Gauge Type
304 S/S

Legs: 1 $\frac{5}{8}$ " Diameter
S/S or Galvanized
Tubing

Under- 18 Gauge S/S
shelf:

Universal Stainless is constantly engaged in a program of improving products and, therefore, reserves the right to change specifications without prior notice.