

REACH-IN FREEZER (0°F)

Model: 1FSENHD

Natural Refrigerant R-290 Model

1-Section Slim Line Reach-In Freezer with Half Doors

- 1FSENHD** - Stainless steel front, aluminum end panels and interior
- 1FSENSAHD** - Stainless steel exterior, aluminum interior
- 1FSENSSHD** - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Hinged glass doors (consult factory)
Additional epoxy coated steel shelves	Rehinging of doors (consult factory)
Chrome or stainless steel shelves	Correctional Facility Options
Adjustable legs	<ul style="list-style-type: none"> • One way security screws
Custom laminates	<ul style="list-style-type: none"> • Locking hasp (lock not included)
Special electrical requirements (consult factory)	<ul style="list-style-type: none"> • Stainless steel mesh cover • Coverless hinges

Consult factory for other model configurations, options and accessories.

Continental
Refrigerator



Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

- Self contained, performance rated refrigeration system
- Natural, environmentally safe, high efficiency R-290 refrigerant¹
- Automatic, electric condensate evaporator
- Expansion valve system

CABINET ARCHITECTURE

- 2" non-CFC polyurethane foam insulation
- Smooth, polished chrome door handles
- Cam action, lift off hinges
- Self-closing doors
- Magnetic snap in door gaskets
- Cylinder lock in each door
- Heavy duty, epoxy coated steel shelves
- Heavy duty pilaster strips
- 5" casters

MODEL FEATURES

- LED interior lighting
- Electronic control, automatic electric defrost
- Will accommodate 12 x 20 pans

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cubic feet)	15 (425 l)
Width, Overall (inches)	17 3/4 (451 mm)
Depth, Overall (inches) (including handles)	35 3/8 (899 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	49 1/2 (1257 mm)
Clear Door Width (inches)	13 1/8 (333 mm)
Clear Half Door Height (inches)	28 1/2 (724 mm)
Height, Overall (inches) (including 5" casters)	82 1/4 (2089 mm)
Number of Doors	2
Number of Shelves	5
Shelf Area (square feet)	9.3 (0.9 sq m)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3
R-290 Refrigerant Charge (oz)	3.6
Capacity (BTU per hour)*	1200

ELECTRICAL DATA



Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	6.1 (3.0)
Defrost Amps (International)	3.9 (2.0)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Height - Crated (inches)	85 1/2 (2172 mm)
Width - Crated (inches)	32 (813 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	65 (1841 cu l)
Weight Std - Crated (pounds)	300 (136 kg)
Weight SS - Crated (pounds)	330 (136 kg)

* Rating @ -15°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

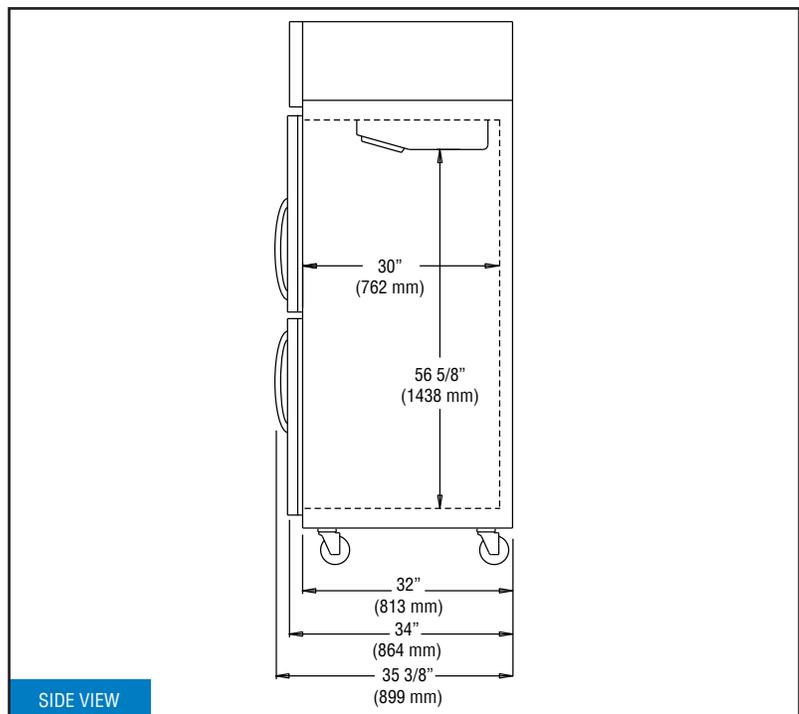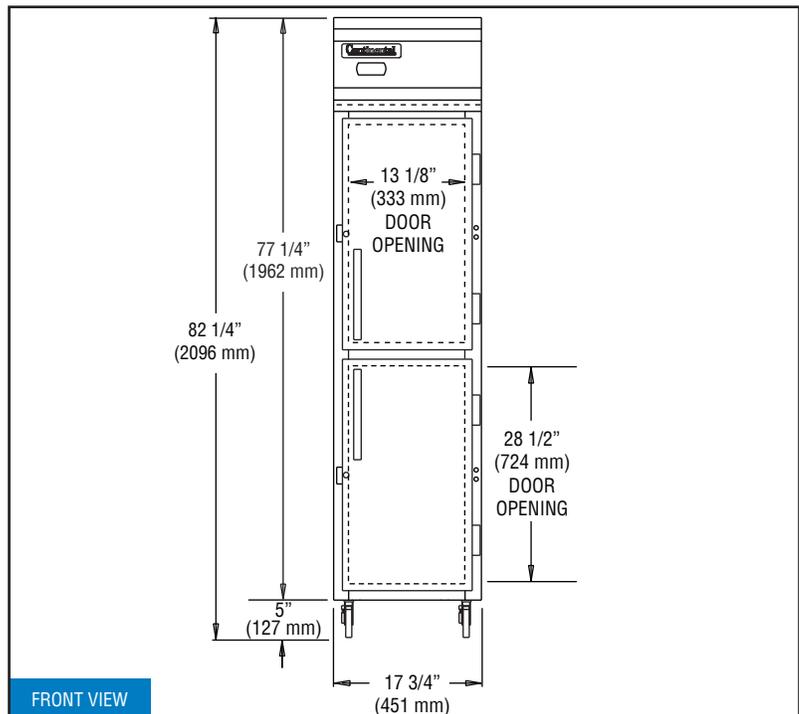

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



PROUDLY
DESIGNED & ASSEMBLED
IN THE U.S.A.



Equipped with one NEMA-5-15P Plug
(varies by country)

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 12/23/25