

# BASE UNDERCOUNTER FREEZER (0°F)

## Model: FA60N-U

Natural Refrigerant R-290 Model

### 60" Base Undercounter Freezer with Solid Doors

Heavy gauge #300 Series stainless steel top, stainless steel front and end panels, galvanized steel rear and grill and aluminum interior.



## Options and Accessories

(upcharge and lead times may apply)

|                                       |   |
|---------------------------------------|---|
| Stainless steel interior              | Door locks  |
| Stainless steel back                  | Compressor left (standard on right)                       |
| Additional epoxy coated steel shelves | Drawers in lieu of doors**                                |
| Stainless steel shelves               | Drawer in lieu of door section above the condensing unit* |
| Pan slides (large section only)       |   |

\*Drawer above condensing unit holds (1) 12 x 20 x 6 pan

\*\*Narrow Drawer holds (1) 12 x 20 x 6 pan per drawer

\*\*Large drawer holds (2) 12 x 20 x 6 pans per drawer

Consult factory for other model configurations, options and accessories.

**Continental**  
Refrigerator



Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### REFRIGERATION SYSTEM

Performance rated refrigeration system

Environmentally safe R-290 refrigerant

Unique forced air design utilizes fans (approx. every 12") across the entire back of unit for even distribution of cold

Automatic, energy saving, non-electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Expansion valve system

Easily serviceable, slide out condensing unit

### CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Spring loaded, self closing doors

Magnetic snap in Santoprene™ door gaskets

Heavy duty, epoxy coated steel shelves

Smooth, polished chrome door handles

Completely enclosed, vented and removable rear and side grills

(8) 1 3/8" diameter plate casters mounted on heavy duty support plates (easily field installed)

### MODEL FEATURES

Electronic control, automatic electric defrost

Refrigerated section with door above the condensing unit

Front breather air divider (field installed)

Reversing condenser fan motor (runs for short period during startup to clear any debris)

Field rehingeable doors

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

**NOTE:** Models come standard with a door over the condensing unit. A drawer over the condensing unit is an option.

APPROVAL:

# Model Specifications

## DIMENSIONAL DATA

|  |                 |
|--|-----------------|
| Net Capacity (cubic feet)                                    | 19 (538 l)      |
| Width, Overall (inches)                                      | 60 (1524 mm)    |
| Depth, Overall (inches)<br>(including handles & bumpers)     | 37 (939 mm)     |
| Height, Overall (inches)<br>(including 1 3/8" plate casters) | 31 3/4 (806 mm) |
| Shelf Area (square feet)                                     | 7.1 (0.7 sq m)  |
| Number of Shelves  | 4               |
| Number of Full Doors   | 2               |
| Number of Half Doors   | 1               |
| Interior Depth (inches)                                      | 30 (762 mm)     |
| Interior Height (inches)                                     | 26 (660 mm)     |
| Interior Height (inches)<br>(above condenser)                | 12 1/2 (318 mm) |
| Interior Width (inches)                                      | 56 (1422 mm)    |

## REFRIGERANT DATA

|                               |      |
|-------------------------------|------|
| Condensing Unit Size (H.P.)   | 1/2  |
| R-290 Refrigerant Charge (oz) | 5.2  |
| Capacity (BTU per hour)*      | 1980 |

## ELECTRICAL DATA

|  |                     |
|--|---------------------|
| Voltage (International)                        | 115/60/1 (220/50/1) |
| Total Amps (International)                     | 6.4 (3.2)           |
| Defrost Amps (International)                   | 9.2 (4.6)           |
| 10 ft. Cord/Plug [attached]<br>(International) | Yes<br>(No)         |

## SHIPPING DATA



|                          |                  |
|--------------------------|------------------|
| Weight (pounds)          | 380 (173 kg)     |
| Height - Crated (inches) | 43 3/4 (1111 mm) |
| Width - Crated (inches)  | 62 (1575 mm)     |
| Depth - Crated (inches)  | 47 (1194 mm)     |

\* Rating @ -15°F evaporator, 90°F ambient  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

# Model Plan Views

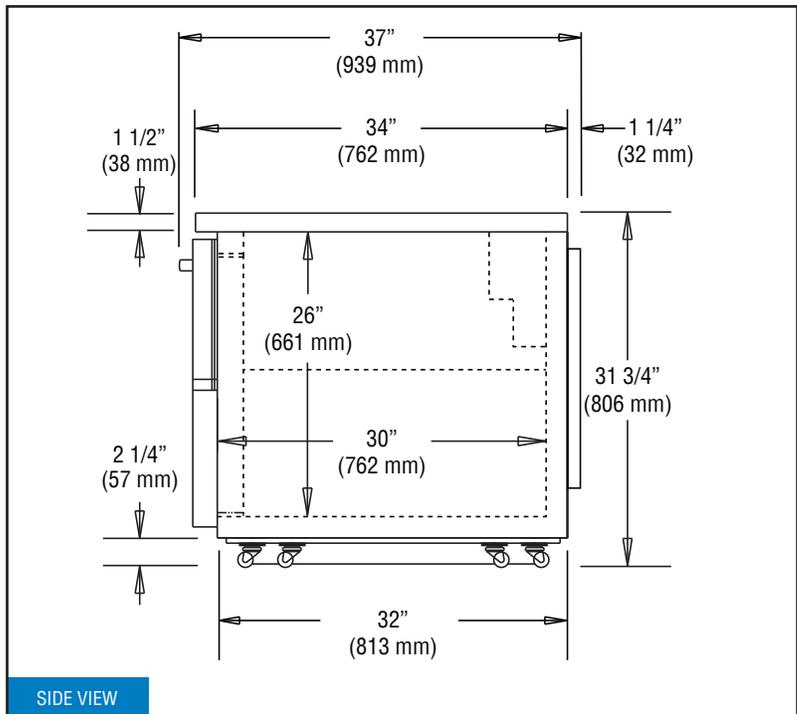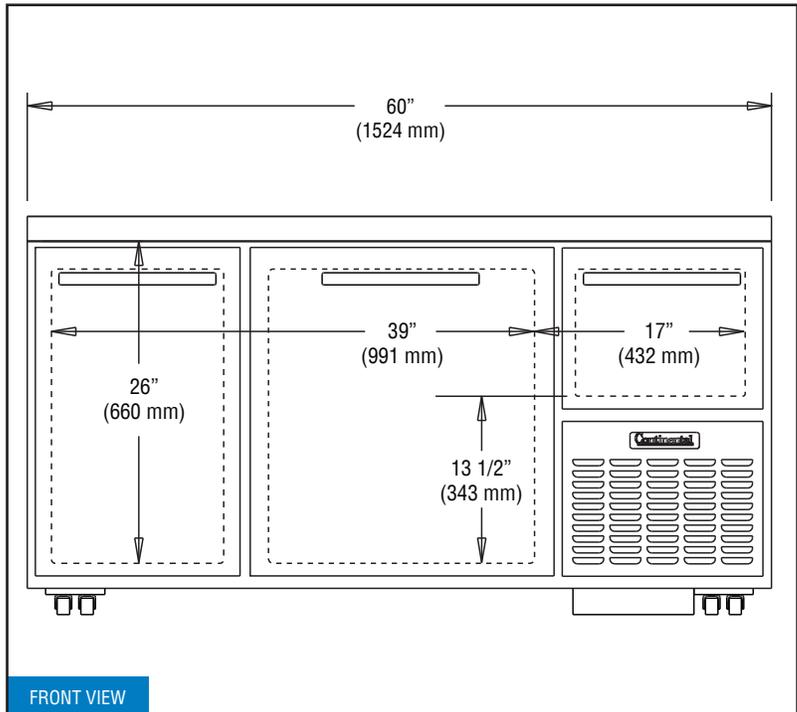

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



PROUDLY  
DESIGNED & ASSEMBLED  
IN THE U.S.A.

© Copyright 2021. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 12/9/25