



Your Solutions Partner

# Specifications

F.O.B. Sedalia, Missouri 65301



**E-4-DLSS**

### OPTIONS:

- 14 gauge tops
- 1/2" poly cutting surface added to integral top
- Backsplash
- Recessed top (to accommodate griddles, fryers, etc.)
- Adaptor plates
- 3-phase wiring
- 6', 8' or 10' Cord and plug
- Heated base module
- Electric outlet in base
- Sliding Doors
- Pass-thru construction
- Veneered plastic laminate panels on body
- Powder coat paint in 12 colors
- Casters (add cord and plug), 5" swivel with locks
- Food shields
- Tray slides
- Work shelves
- Customer side Kickplates - Stainless steel or Painted
- 34" ADA height (units finish at 33.5"). Adjustable height casters with 5/8" adjustability allow leveling to 34"

### DUKE MANUFACTURING CO.

2305 N. Broadway  
 St. Louis, MO 63102  
 800.735.3853 Toll Free  
 314.231.5074 Fax  
 www.dukemfg.com  
 SS-1029 Thurmaduke DLPG-DLSS

**Approval Stamp(s):**

### PRODUCT INFORMATION:

PROJECT: \_\_\_\_\_

ITEM: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

### MODEL:

Thurmaduke® Steamtables  
 Hot Food Units - Electric - Deluxe

- E-2-DLPG/E-2-DLSS 2 top openings
- E-3-DLPG/E-3-DLSS 3 top openings
- E-4-DLPG/E-4-DLSS 4 top openings
- E-5-DLPG/E-5-DLSS 5 top openings
- E-6-DLPG/E-6-DLSS 6 top openings

### TOP:

- 16 gauge 300 Series stainless steel
- Top openings die-stamped. 11 7/8" x 19 7/8"
- Integral carving/work surface

### HEAT COMPARTMENTS:

- 6 1/2" deep Sealed wells with drains
- Wet or Dry operation
- Fully Insulated Wells
- Copper manifolds and brass master valve
- 750 watt elements
- 120, 208 or 240 volt A/C
- Master Toggle Switch w/ indicator light for entire unit
- Single Phase standard

### BODY AND INTERIOR SHELF:

- Stainless Steel body
- Painted body w/ choice of 12 powder coat colors
- Full bottom shelf to match body
- 6" polished stainless steel adjustable legs

### INTEGRAL DISHSHELF:

- Heavy gauge, one-piece stainless steel - 8" wide
- Housing for control knobs, and master switch
- Wire knob guards

### AGENCY LISTINGS:



Specification subject to change


 **WARNING** For CA residents: go to [www.dukemfg.com/prop65](http://www.dukemfg.com/prop65) for prop 65 warning

REV E 12/10/2025

THURMADUKE® STEAMTABLES - HOT FOOD - ELECTRIC - DELUXE


Catalog No. TST-DELECHOT

A.I.A. File No. 35-C-13

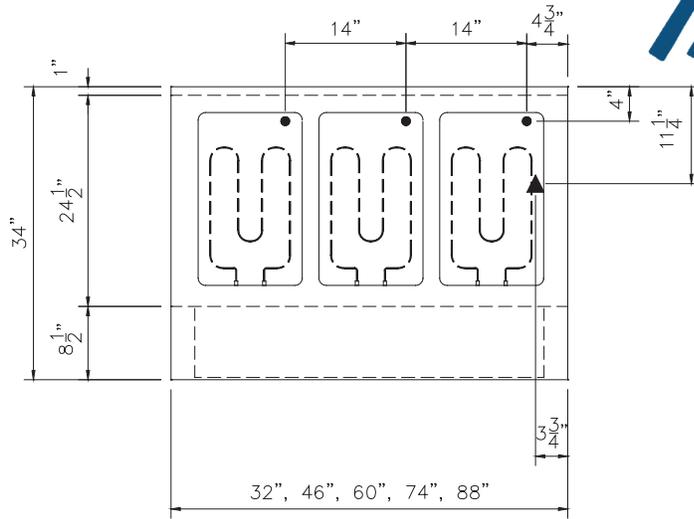


TOP VIEW

LEGEND	
▲	ELECTRICAL CONNECTION
●	DRAIN LOCATION

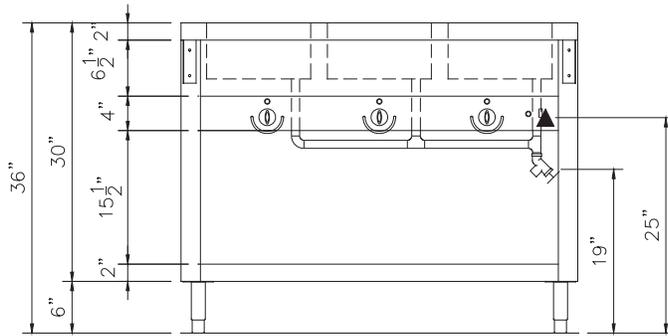

FRONT VIEW

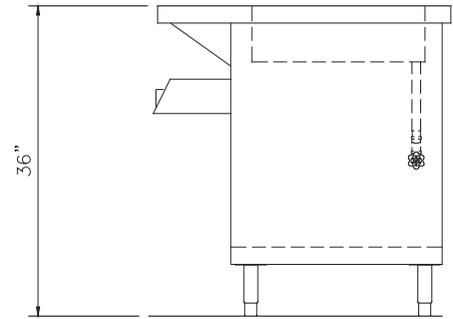

RIGHT SIDE VIEW

DIMENSIONS:

FREIGHT CLASS: 150

Model		Length		Width		Height		Top Openings	Cube ft. Crated	Weight	
Enameled	Stainless	in	cm	in	cm	in	cm			lbs	kg
E-2-DLPG	E-2-DLSS	32	81.3	34	86.4	36	91.4	2	27.0	255	115.9
E-3-DLPG	E-3-DLSS	46	116.8	34	86.4	36	91.4	3	38.1	335	152.3
E-4-DLPG	E-4-DLSS	60	152.4	34	86.4	36	91.4	4	49.2	410	186.4
E-5-DLPG	E-5-DLSS	74	188.0	34	86.4	36	91.4	5	60.2	495	225.0
E-6-DLPG	E-6-DLSS	88	223.5	34	86.4	36	91.4	6	71.3	595	270.5

ELECTRICAL SPECIFICATIONS:

Model 750W	120V 750W			208V 750W			240V 750W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
E-2-DLPG/SS	1500	12.5	5-15	1500	7.2	6-20	1500	6.3	6-20
E-3-DLPG/SS	2250	18.8	L5-30	2250	10.8	6-20	2250	9.4	6-20
E-4-DLPG/SS	3000	25.0	5-50	3000	14.4	6-20	3000	12.5	6-20
E-5-DLPG/SS	3750	31.3	5-50	3750	18.0	L6-30	3750	15.6	L6-30
E-6-DLPG/SS	N/A			4500	21.6	L6-30	4500	18.8	L6-30

Cord and NEMA plug NOT included



**Duke Manufacturing Co.**  
2305 N. Broadway  
St. Louis, MO 63102

Phone: 314-231-1130  
Toll Free: 1-800-735-3853  
Fax: 314-231-5074

www.dukemfg.com