






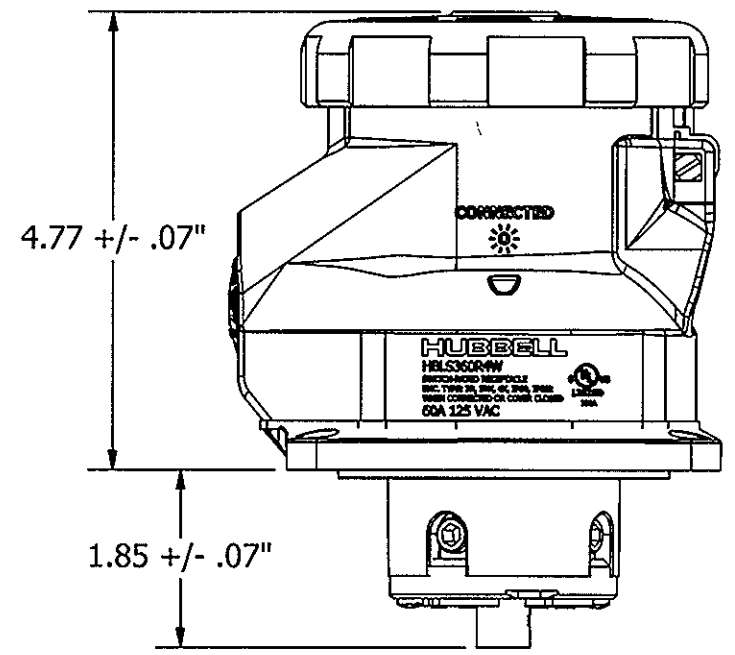
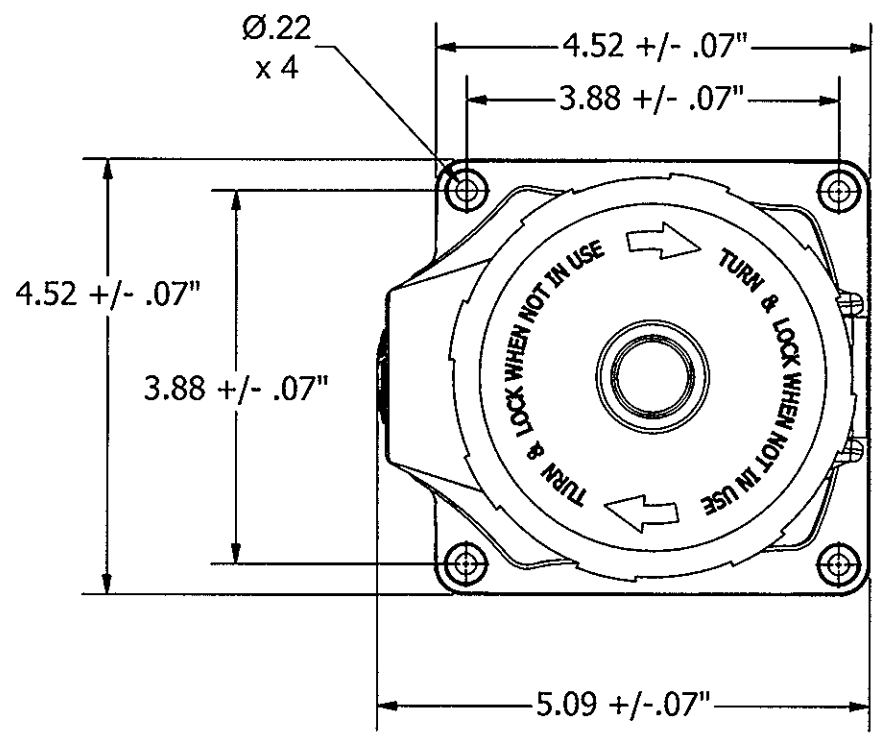



CONFIGURATION TABLE				
CAT NO.	CONFIGURATION	RATING	HSG MAT'L	HSG COLOR
HBSL360R4W HBSL360R4WP		60A 125 VAC 60A 125 VAC WITH PILOT/AUX CONTACT	PBT	YELLOW
HBSL360R6W HBSL360R6WP		60A 250 VAC 60A 250 VAC 63A 220-240 VAC WITH PILOT/AUX CONTACT	PBT	BLUE
HBSL360R7W HBSL360R7WP		60A 480 VAC 60A 480 VAC WITH PILOT/AUX CONTACT	PBT	RED
HBSL460R5W HBSL460R5WP		60A 3Φ 600 VAC 60A 3Φ 600 VAC WITH PILOT/AUX CONTACT	PBT	BLACK
HBSL460R6W HBSL460R6WP		60A 380-415 VAC 60A 380-415 VAC 63A 380-415 VAC WITH PILOT/AUX CONTACT	PBT	RED
HBSL460R7W HBSL460R7WP		60A 3Φ 480 VAC 60A 3Φ 480 VAC WITH PILOT/AUX CONTACT	PBT	RED
HBSL460R9W HBSL460R9WP		60A 3Φ 250 VAC 60A 3Φ 250 VAC 63A 3Φ 250 VAC WITH PILOT/AUX CONTACT	PBT	BLUE
HBSL460R12W HBSL460R12WP		60A 125/250 VAC 60A 125/250 VAC WITH PILOT/AUX CONTACT	PBT	ORANGE
HBSL560R5W HBSL560R5WP		60A 3Φ 347/600 VAC 60A 3Φ 347/600 VAC WITH PILOT/AUX CONTACT	PBT	BLACK
HBSL560R6W HBSL560R6WP		60A 200/346 - 240/415 VAC 60A 200/346 - 240/415 VAC 63A 220/415 VAC WITH PILOT/AUX CONTACT	PBT	RED
HBSL560R7W HBSL560R7WP		60A 3Φ 277/480 VAC 60A 3Φ 277/480 VAC WITH PILOT/AUX CONTACT	PBT	RED
HBSL560R9W HBSL560R9WP		60A 3Φ 120/208 VAC 60A 3Φ 120/208 VAC 63A 3Φ 120/208 VAC WITH PILOT/AUX CONTACT	PBT	BLUE
CODE 74545				

M-12538

1

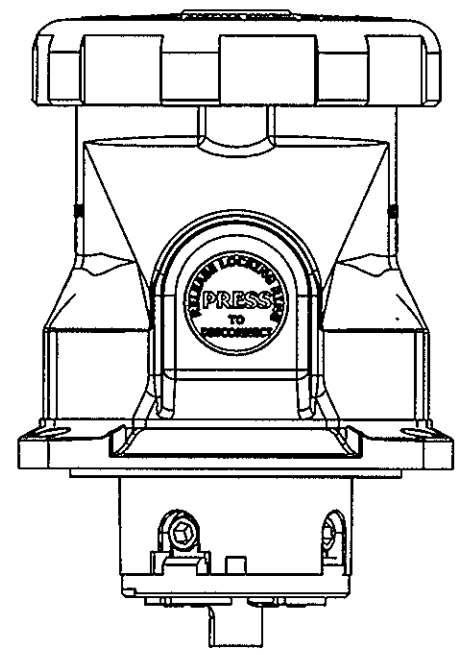

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
HOUSING	PBT	
INTERIOR	NYLON	
SLEEVES	BRASS	
PHASE, NEUTRAL & GND CONTACTS	BER. COPPER	SILVER
TERMINAL SCREWS	SS	
HINGE & LID	PBT	
HINGE PIN & SPRING	SS	
ASSY SCREWS	SS	
LED WINDOW	POLYCARBONATE	
HOUSING GASKET	RUBBER	

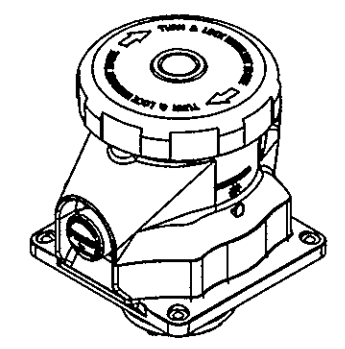

3, 4 & 5 WIRE
SWITCHED RECEPTACLE

1	RELEASED FOR PRODUCTION PER DCN 21767 WHD 1/27/16		
SYM	DESCRIPTION	APPRO	DATE
THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE			
TITLE 60 & 63A 2W/3P, 3W/4P & 4W/5P PIN & SLEEVE SWITCHED RECEPTACLES			
TOLERANCES UNLESS OTHERWISE SPECIFIED		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
.XX = ±.01 .XXX = ±.005 ANGLES = ±2°		DR. BY wdietz	APP. BY
		TR. BY WHD	SCALE
		CHK'D BY	DATE 9/23/2015

DIMENSION SHEET FOR CAT. NO.

SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☒

B

M-12538

1