
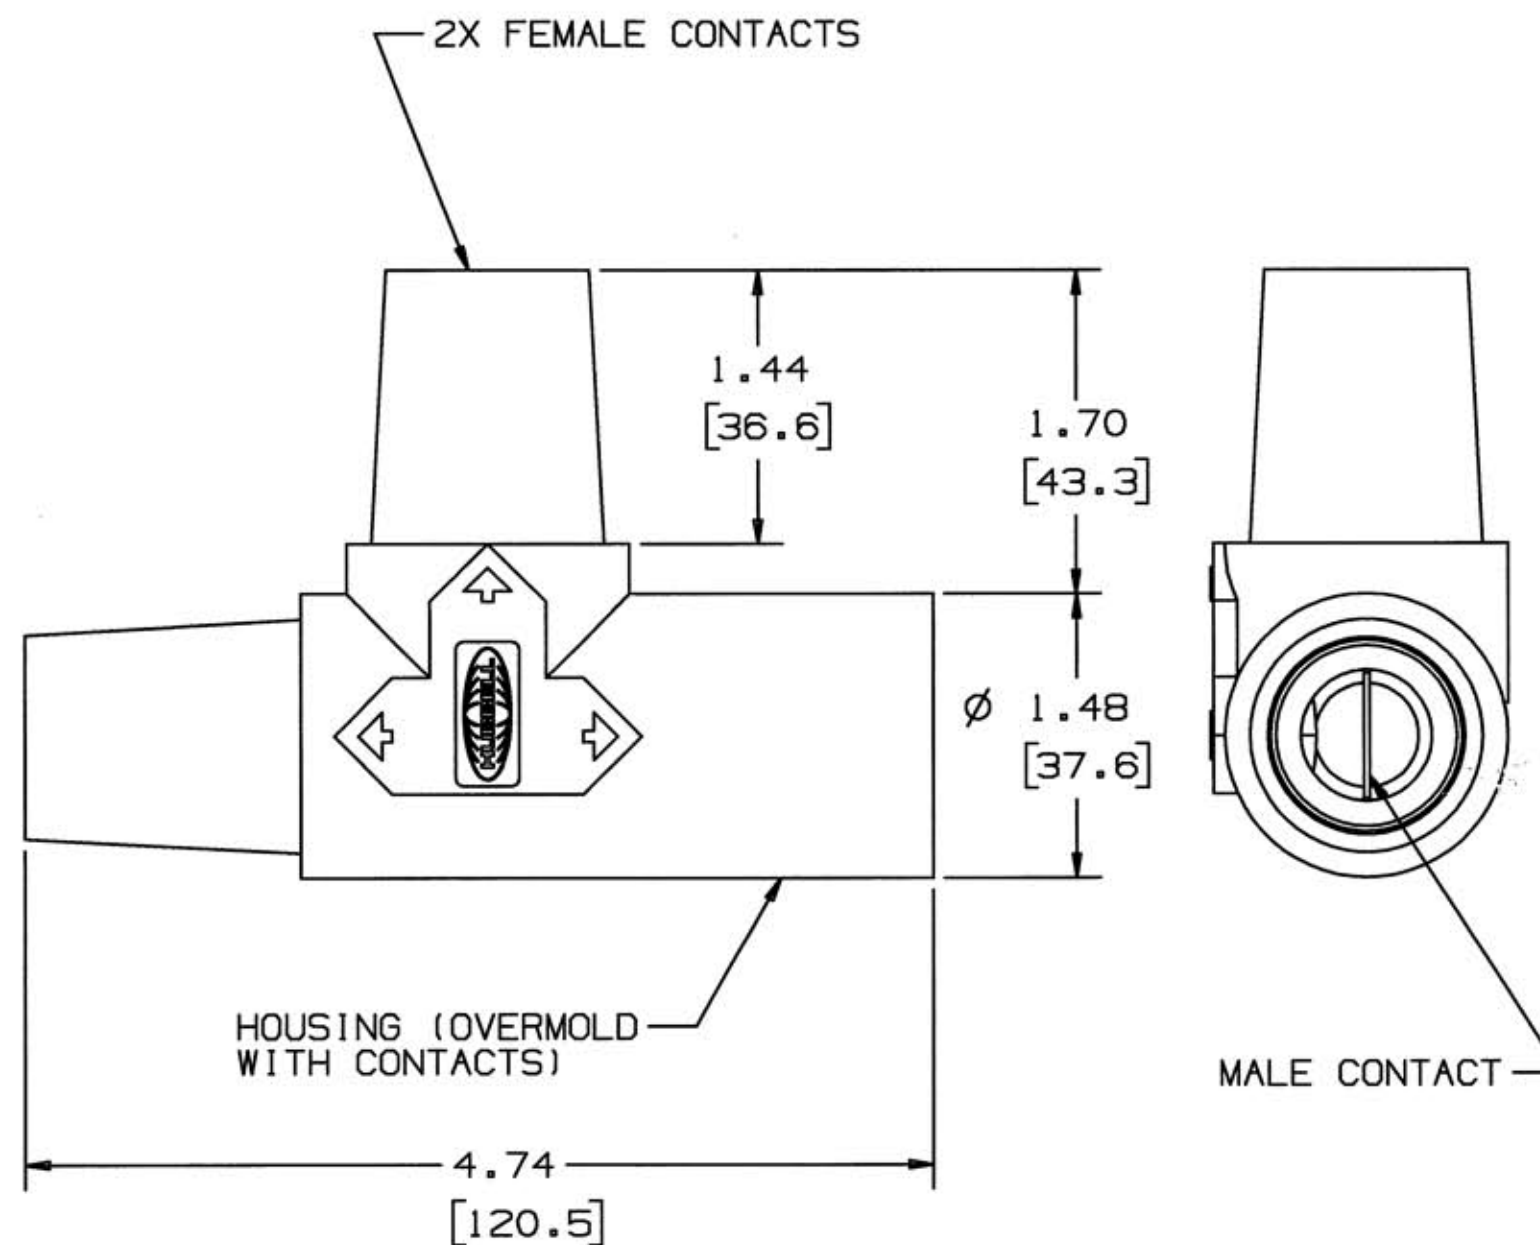


M-8930 2

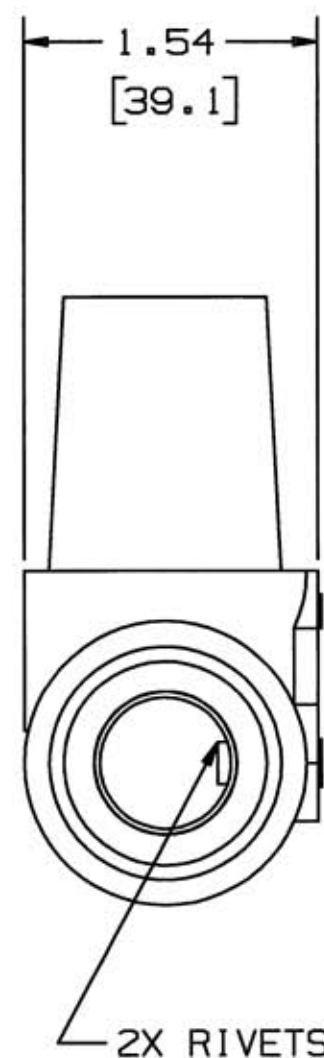

NOTES:

1. DIMENSIONS ARE INCHES $\pm .02$
[mm] $\pm .5$
2. RATING: 600VAC/250VDC 400 AMP
3. UL/c-UL ENCLOSURE TYPES 3R, 4X, 12,
SEE INSTRUCTION SHEET

HUBBELL CAT. NO.	COLOR
HBLTBK	BLACK
HBLTW	WHITE
HBLTGN	GREEN
HBLTBR	RED
HBLTBL	BLUE
HBLTO	ORANGE
HBLTBN	BROWN
HBLTY	YELLOW

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	TPE	SEE TABLE
FEMALE CONTACT	BRASS	
RIVET	BRASS	
MALE CONTACT	BRASS	

2	REMOVE \varnothing 1.06 [27.0] & \varnothing 1.22 [30.9] ADD $\pm .02$ & $\pm .5$ TO NOTE 1 CHANGED NOTE 3 PER DCN 11484 TwB	<i>TwB</i>	12/15/04
1	RELEASED PER DCN 10992 MJM TB	<i>TwB</i>	6/25/03
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE SINGLE POLE
TAPPING TEE FEMALE/
FEMALE/MALE

TOLERANCES UNLESS OTHERWISE SPECIFIED	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT
FRACTIONS $\pm 1/64$	DR. BY MJM APP. BY
DECIMALS $\pm .005$	TR. BY SCALE 1:1
ANGLES $\pm 2^\circ$	CHK'D BY DATE 6/11/03